

The mdframed package ¹

auto-split frame environment

Marco Daniel Elke Schubert

v1.5

2012/04/08

The standard methods for framing text (`\fbox` or `\fcolorbox`) require you to handle page breaks by hand, meaning that you have to split the `\fbox` into two. The present package defines the environment `mdframed` which automatically deals with pagebreaks in framed text.

By defining new environments the user may choose between several individual designs.

Linked files: [mdframed-example-default.pdf](#) [mdframed-example-tikz.pdf](#)
[mdframed-example-pstricks.pdf](#) [mdframed-example-texsx.pdf](#)

FYI: I create a repository for `mdframed` on [github](#) where you can [download](#) the current development status.

Contents

1. Motivation	1	5.5. Theorems	12
2. Syntax	2	5.6. Footnotes	13
3. The frames	3	6. Examples	13
4. Commands	3	7. Errors, Warnings and Messages	14
5. Options	4	8. Known Problems	15
5.1. Global Options	5	9. ToDo	15
5.2. Global and Local Options	5	10. Acknowledgements	15
5.3. Hidden Lines	10	A. More information	16
5.4. Frametitle	11		

1. Motivation

Many users wish to (further) emphasize lemmata, definitions, proofs, etc. The package `mdframed` allows you to create environments with breakable frames. I think an example is the best way to demonstrate its properties.

Theorem 1.1 (Pythagorean theorem) *In any right triangle, the area of the square whose side is the hypotenuse is equal to the sum of the areas of the squares whose sides are the two legs.*

¹Extending the package `framed.sty`

$$a^2 + b^2 = c^2$$

The frame was defined with the following settings.

```
\newmdtheoremenv[outerlinewidth=2,leftmargin=40,%
  rightmargin=40,backgroundcolor=yellow,%
  outerlinecolor=blue,innertopmargin=0pt,%
  splittopskip=\topskip,skipbelow=\baselineskip,%
  skipabove=\baselineskip,ntheorem]{theorem}%
  {Theorem}[section]
\begin{theorem}[Pythagorean theorem]
...
\end{theorem}
```

2. Syntax

Loadings mdfamed

The package itself loads the packages

- kvoptions,
- xparse (new),
- etoolbox and
- color.

Depending on the options mdfamed will load

- xcolor,
- tikz or
- pstricks.

Load the package as usual:

```
\usepackage[<GLOBAL OPTIONS>]{mdfamed}
```

Only the option `framemethod` should be loaded by the optional argument of `\usepackage`. All other options should be loaded with `\mdfsetup` or related environments. The package should be loaded after `amsthm` if you need the package.

Provided environment

The package defines only one environment with the following syntax:

```
\begin{mdfamed}[<LOCAL OPTIONS>]
  <CONTENT>
\end{mdfamed}
```

To create own environments with `mdfamed` see section 4.

Autodetecting floats

`mdfamed` detects whether the environment is used inside `float` or `minipage` environments. If you use `mdfamed` in such an environment `mdfamed` will use the option `nobreak` automatically.

Twoside-mode

If you are using `mdframed` inside `twoside-mode` you can set the option `innermargin` and `outermargin` (see section 5.2.1). The length will be ignored if you use the option `usetwoside`.

3. The frames

Normally you can say `mdframed` draws only some lines. To allow page breaks the following designs are supported. If you load the package with `framemethod=default` you can only draw a single line. Inside the gray box the text will be printed.

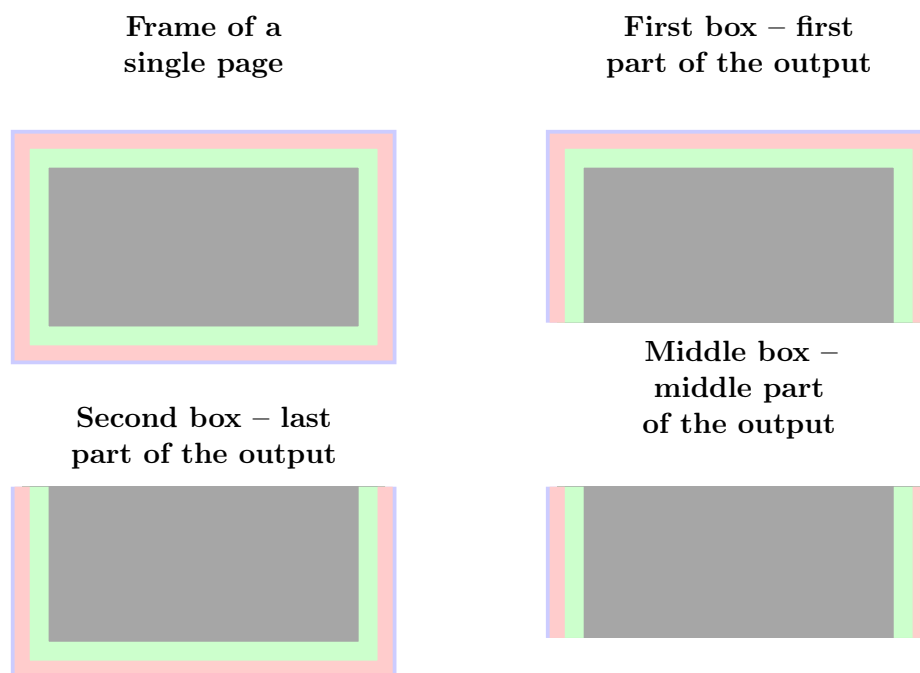


Figure 1: The basic frames

4. Commands

The following commands should countenance your by the handling with `mdframed`

`\newmdenv`

The command has the following syntax:

```
\newmdenv[<MDFRAMED OPTIONS>]{Name of the environment}
```

In this way you can simply use:

```
\newmdenv[linecolor=red,frametitle=Infobox]{infobox}
...
\begin{infobox}[backgroundcolor=yellow]
foo foo foo foo foo foo
\end{infobox}
```

`\renewmdenv`

By using this command you can redefine environments which are created by `\newmdenv`.

`\surroundwithmdframed`

Sometimes you have predefined environments. This commands allows you to set an environment surround this predefined environment. To set a `mdframed` around the environment `verbatim` you can simple say without changing the original name.

```
\surroundwithmdframed[linewidth=2pt]{verbatim}
```

`\mdflength`

If you want to work with length defined by `mdframed` (for example `innerleftmargin`) you can now simple use the command `\mdflength`.

```
Some Text \hspace{\mdflength{innerleftmargin}} Some Text
\the\mdflength{innerleftmargin}
```

`\mdfsetup`

To set the options you can use the optional argument of `\usepackage` or you can use the command `\mdfsetup` which is not limited to the preamble. Inside a group the settings work only local.

At this point I want to recommend the using of the command `\mdfsetup` instead of setting package option via the optional argument of `\usepackage`. So you are avoiding breaking of non robust commands.²

`\mdfdefinestyle`

`\mdfdefinestyle` allows the user to define different styles and use as an option of `mdframed` via `style`. The option `style` is explained in section 5.2.3.

Here a small example:

```
\mdfdefinestyle{mystyle}{leftmargin=0pt,%
                        linecolor=blue}
...
\begin{mdframed}[style=mystyle]
foo
\end{mdframed}
```

`\mdfapptodefinestyle`

This commands allows to expand a defined style.³

5. Options

The package provides various options to manipulate frames. In the following section all options are listed. Some internal macros which can be manipulated are not shown in this documentation. The listed options are divided in global and local options. The global options can not be used inside `\mdfsetup`.

²Thanks to Heiko Oberdiek and Philipp Stephani [kvoptions-Declaration von Optionen schlägt fehl](#)

³Thanks to Martin Scharrer and Enrico Gregorio:

<http://tex.stackexchange.com/questions/34684/argument-of-setkeys>

5.1. Global Options

The following options are only global options.

`xcolor` default=`none`

By setting this key, the package `xcolor` will be loaded with the given value(s). Without any value `mdframed` loads the package `color` without any options. If the package `xcolor` is already loaded the given option will be ignored. I recommend to load `xcolor` before `mdframed`.

`framemethod` default=`default`

With this key you can change the way frames are drawn. You can decide whether the frame is drawn with

1. \LaTeX -commands `\hrule`, `\vrule`, `\rule`,
2. `TikZ` (the package `TikZ` will be loaded) or
3. `PSTricks` (the package `pstricks` will be loaded).

The option `framemethod` requires a string. Allowed combinations are listed in the following table.

Table 1: Allowed keys for `framemethod`

Method	Allowed keys
\LaTeX -commands	<code>default</code> , <code>tex</code> , <code>latex</code> , <code>none</code> , <code>0</code>
<code>TikZ</code>	<code>tikz</code> , <code>pgf</code> , <code>1</code>
<code>PSTricks</code>	<code>pstricks</code> , <code>ps</code> , <code>postscript</code> , <code>2</code>

FYI

It is independently whether the `method` is written with no, one or more capital letter.

Note

The manipulation of the frames depends on the option `framemethod`. For further information see below.

5.2. Global and Local Options

The options listed below can be set globally or locally and they are not limited to the preamble. I tried to define self explained names.

5.2.1. Options with lengths

In figure (2) you can see the adjustable lengths (compare also figure (1)) which will be described below. All lengths accept two kinds of input. The first one is a length (e.g. `2pt`) and the second one is a number (e.g. `2`) which will be multiplied by `1 defaultunit`. The figure shows three different colored frames.

I know that the predefined lengths are not well prepared. Maybe I will change it later.

`defaultunit` default=`pt`

see the sentence above.

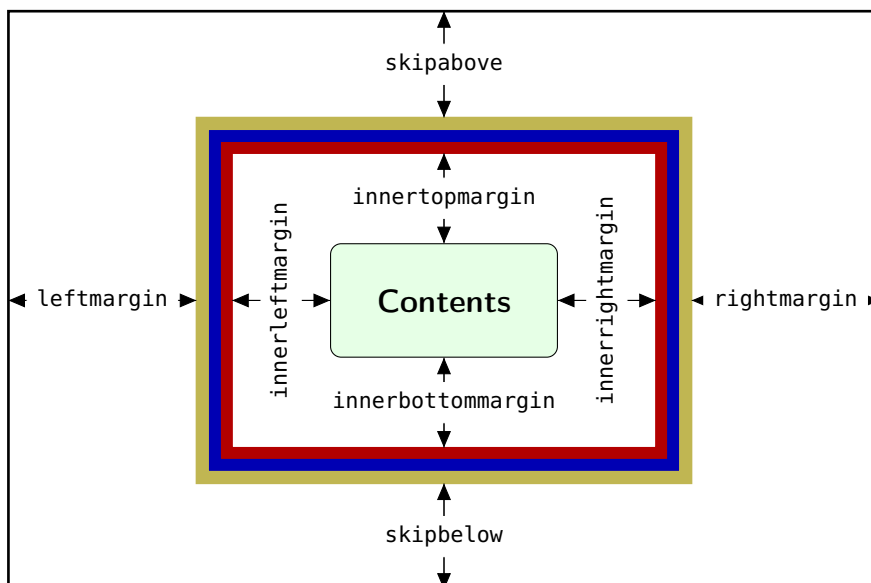


Figure 2: adjustable lengths of mdframed

`skipabove` default=0pt

Sets an additional skip above the frame.

`skipbelow` default=0pt

Sets an additional skip below the frame.

`margin`

This option is not longer supported. Use `leftmargin` and `rightmargin` instead.

`leftmargin` default=0pt

Sets the length of the left margin of the environment. This option has an effect only in `singleside-mode` or, in `twoside-mode`, if the option `usetwoside=false` has been given. See also options `outermargin` and `innermargin`.

`rightmargin` default=0pt

Sets the length of the right margin of the environment. This option has an effect only in `singleside-mode` or, in `twoside-mode`, if the option `usetwoside=false` has been given. See also options `outermargin` and `innermargin`.

`innerleftmargin` default=10pt

Sets the length of the inner left margin of the environment.

`innerrightmargin` default=10pt

Sets the length of the inner right margin of the environment.

`innertopmargin` default=.4\baselineskip

Sets the length of the inner top margin of the environment.

`innerbottommargin` default=.4\baselineskip
 Sets the length of the inner bottom margin of the environment.

The following lengths are not shown in figure (2).

`userdefinedwidth` default=0pt
 Sets the width of the whole `mdframed` environment. The width represent the width including the line width and the inner margins. The outer margins will be ignored.

`outermargin`
 Sets the length of the outer margin. This option is only available in `twoside`-mode.

`innermargin`
 Sets the length of the inner margin. This option is only available in `twoside`-mode.

`splittopskip` default=0pt
 Sets the length of the skip above the split part of the environment.

`splitbottomskip` default=0pt
 Sets the length of the skip below the split part of the environment.

`linewidth` default=0.4pt
 Sets the width of the line around the environment.

`roundcorner` default=0pt
 Sets the size of the radius of the corners of the frames.
 This works only with `framemethod=TikZ` or `PSTricks`.

`innerlinewidth` default=0pt
 Sets the width of the inner line around the environment.
 This works only with `framemethod=TikZ` or `PSTricks`.

`outerlinewidth` default=0pt
 Sets the width of the outer line around the environment.
 This works only with `framemethod=TikZ` or `PSTricks`.

`middlelinewidth` default=linewidth
 Sets the width of the middle line around the environment.
 This works only with `framemethod=TikZ`.

5.2.2. Colored Options

`linecolor` default=black
 Sets the color of the line around the environment.

`backgroundcolor` default=white

Sets the color of the background of the environment.

`fontcolor` default=black

Sets the color of the contents of the environment.

`innerlinecolor` default=linecolor

Sets the color of the inner line around the environment.

This works only with `framemethod=TikZ` or `PSTricks`.

`middlelinecolor` default=linecolor

Sets the color of the middle line around the environment.

This works only with `framemethod=TikZ` or `PSTricks`.

`outerlinecolor` default=linecolor

Sets the color of the outer line around the environment.

This works only with `framemethod=TikZ` or `PSTricks`.

5.2.3. General options

`everyline` default=false

Allows to draw a bottom and a top line at splitted frames.

`font` default={}

Sets the font of the environment.

`ntheorem` default=false

Before setting this boolean key, you have to load the package `ntheorem`. With this option you set the values `\theorempreskipamount` and `\theorempostskipamount` to 0pt.

`nobreak` default=false

Sometimes it is useful to prevent a frame from splitting. The `nobreak` option is used for this purpose. If you activate this option you can enable it by setting `nobreak=false`.

`usetwoside` default=true

If you set the `twoside` option you can work with `outermargin`. This option disable this and you work with `leftmargin` and `rightmargin`.

`needspace` default=0pt

Sometimes it is useful to set a minimum height before a frame should be splitted. For such cases you can use `needspace`. The option requires a length which sets the minimum height before a frame will be splitted.

`style`

If you define a special style with `\mdfdefinestyle` you can use the key `style` to load the style. `mdframed` has no predefined styles yet.

`settings` default=none

This option allows the user to commit some macros. An example is shown in the example files.

`align` default=`left`

Sometimes it is useful to align the environment itself. For this you have the option `align` which can be set to the following strings:

- `left`,
- `right` and
- `center`.

The alignments `left` or `right` depend on the given lengths `leftmargin` and `rightmargin`. Later I will present an example to demonstrate my bad English explanation.

`shadow` default=`false`

Draw a shadow. The shadow doesn't influence the bounding box so the shadow can be drawn in the margin without any overflow box. Note if you are using the TikZ you must load the library. `mdframed` doesn't do the job to avoid double loading of a library.

`shadowsize` default=`8pt`

Specify the size of the shadow.

`shadowcolor` default=`black!50`

Specify the color of the shadow.

`pstrickssetting` default=`none`

With this key you can pass several options to `\psset`. For example if you want all lines dashed you will have to set `pstrickssetting={linestyle=dashed}`. It is very important to put the options of `pstrickssetting` in brackets.

This works only with `framemethod=PSTricks`.

`pstricksappsetting` default=`none`

`mdframed` works with defined style for the different elements. By using `\addtopstyle` in combination with this option you can expand the definition. The predefined styles are

- `mdfbackgroundstyle`
- `mdfframetitlebackgroundstyle`
- `mdfouterlinestyle`
- `mdfinnerlinestyle`
- `mdfmiddlelinestyle`

Before you change one please have a look at the file `md-frame-2.mdf` to see the settings.

This works only with `framemethod=PSTricks`.

`tikzsetting` default=`none`

With this key you can pass several options to `\tikzset`. Some examples are listed in the next section. It is very important to put the options of `tikzsetting` in brackets.

This works only with `framemethod=TikZ`.

`apptotikzsetting` default=none

With this key you can add several options to `tikzsetting`. This key based on the idea of manipulation of predefined keys of `mdframed`. The package `mdframed` defines via `\tikzset` the following keys to draw frames.

- `\tikzset{mdfbox/.style}`
- `\tikzset{mdfcorners/.style}`
- `\tikzset{mdfbackground/.style}`
- `\tikzset{mdfinnerline/.style}`
- `\tikzset{mdfouterline/.style}`
- `\tikzset{mdfmiddleline/.style}`
- `\tikzset{mdfframetitlerule/.style}`
- `\tikzset{mdfframetitlebackground/.style}`
- `\tikzset{mdfshadow/.style}`

Before you change one please have a look at the file `md-frame-1.mdf` to see the settings.
This works only with `framemethod=TikZ`.

`singleextra` default={}

With this key you can put extra material to the drawing environment of `mdframed` only for a non splitted frame.

This works only with `framemethod=TikZ` and `PSTricks`.

`firstextra` default={}

With this key you can put extra material to the drawing environment of `mdframed` only for the first part of the splitted frame.

This works only with `framemethod=TikZ` and `PSTricks`.

`middleextra` default={}

With this key you can put extra material to the drawing environment of `mdframed` only for the middle part of the splitted frame.

This works only with `framemethod=TikZ` and `PSTricks`.

`secondextra` default={}

With this key you can put extra material to the drawing environment of `mdframed` only for the second part of the splitted frame.

This works only with `framemethod=TikZ` and `PSTricks`.

5.3. Hidden Lines

`topline` default=true

Draws a line at the top.

`bottomline` default=true

Draws a line at the bottom.

`leftline` default=true

Draws a line on the left.

`rightline` default=true

Draws a line on the right.

`hidealllines` default=false

With this option you can decide whether all lines should be drawn or not.

5.4. Frametitle

In this section all relevant options of the frame title will be presented. They are not divided in their properties.

`frametitle` default=none

The environment gets a title. To set a title use `frametitle={The Title of the frame}` as an option of the environment.

`frametitlefont` default=\normalfont\bfseries

Sets the format of the `frametitle`.

`frametitlealignment` default=\raggedleft

Align the `frametitle`. This option must be set via `\mdfsetup`.

`frametitlerule` default=false

Set this key to `true` to get a line between the frame title and the text.

`frametitlerulewidth` default=.2pt

Sets the width of the line between the text and the title of `mdframed`.

`frametitleaboveskip` default=5pt

Sets the skip of the frame title to the margin above of `mdframed`.

`frametitlebelowskip` default=5pt

Sets the skip of the frame title to the rule of the frame title.

`frametitlebackgroundcolor` default=white

Sets the color of the background of the `frametitle`

FYI and Note

`mdframed` can't handle page breaks inside the `frametitle` well. If you get a page break please have a closer look to the output.

If a frame title is given the optional length `innertopmargin` is set between the rule under the frame title and the contents of `mdframed`.

`repeatframetitle` default=false

Repeat the frame title on every frame. The feature is currently not well implemented!!!

5.5. Theorems

In this section is described which commands can help you to define theorem environments with `mdframed`.

`\newmdtheoremenv`

Since the package is often used to highlight theorem environments, I have created a command⁴ to simplify this process. The command has the following syntax:

```
\newmdtheoremenv[<mdframed-options>]{<envname>}%
    [<numberedlike>]{<caption>}[<within>]
```

The last four arguments are equivalent to the command `\newtheorem`. Only the first optional argument is able to pass `mdframed`-options. A simple example is:

```
\theoremstyle{<some style>}
\newmdtheoremenv[linecolor=blue]{lemma}%
    {Lemma}[section]
...
\begin{lemma}[Some title]
    foo foo foo foo foo foo
\end{lemma}
```

So far there is no `\renewmdtheoremenv`!

`\mdtheorem`

This is a special kind of `\newtheorem`. The command has the following syntax.

```
\mdtheorem[<mdframed-options>]{<envname>}%
    [<numberedlike>]{<caption>}[<within>]
```

As you can see the arguments are equal to `\newtheorem` but the command ignores every `\theoremstyle`. This is based on the following behavior.

The command `\mdtheorem` creates two environments based on the given first mandatory argument. The first environment is named like the given argument and creates a numbered theorem. The second environment is named like the first mandatory argument with a star. This environment has the same formatting but isn't numbered.

The syntax of the new defined environments is equal to the normal theorem environments.

```
\begin{environment}[optional title]
...
\end{environment}
```

What happened? The caption of the command will be set as the frame title. In this way all options of the frame title are available. Furthermore `mdframed` provides additional options explained below.

`theoremseparator`

default={:}

Sets the separator of the caption and the title of the theorem. The `theoremseparator` will be printed only if an theorem title is given.

⁴Thanks to Martin Scharrer and Enrico Gregorio:

[Own command to create new environment](#)

`theoremtitlefont` `default={}`

Via the option `frametitlefont` you can manipulate the font of the frame title. The option `theoremtitlefont` allows to set a different font to the title of the theorem.

`theoremspace` `\space`

Sets the space after `theoremseparator`.
Examples can be found in the attached files.

5.6. Footnotes

Inside the environment you can use the command `\footnote` as usual. `mdframed` uses the syntax of environment `minipage` with the same counter.

Every footnote text will be collected inside a box and will be displayed at the end of the environment `mdframed`.

`footnotedistance` `default= \bigskipamount`

The length is the distance between the end of the environment `mdframed` and the displaying of the `\footnoterule`.

`footnoteinside` `default=true`

The position of the footnotes can be changed with the option `footnoteinside`. The footnotes will be displayed at the end of the environment but you can decide whether the output is inside `mdframed` or after.

Note

The output of the footnotes with the option `footnoteinside=false` are not in a splitted frame. I think it isn't useful because the first line of a new page shouldn't be a footnote.

6. Examples

I outsource the examples in four files to limit the documentation. The files are

mdframed-example-default

Demonstration of examples created with `framemethod=default`.

mdframed-example-tikz

Demonstration of examples created with `framemethod=TikZ`.

mdframed-example-pstricks

Demonstration of examples created with `framemethod=pstricks`.

mdframed-example-texsx

Demonstration of examples like interaction with `listings`

The examples are often not equivalent but normally they can be adapted to another method. So I really recommend to have a look to all example files.

The Korean T_EXGroup created a very nice presentation. I want to show the link because it's really a great work: [kts 2012 mdframed](#).

7. Errors, Warnings and Messages

The package `mdframed` provides different errors, warnings and messages in the `log`-file. Some \LaTeX -editors like `TeXMaker` or `TeXStudio` have a special tab for errors and warnings but not for messages. So you should look in the `log-File` itself.

The following errors and warnings are generated by `mdframed`.

```
The package ... does not exist but
needed by mdframed
```

To avoid this problem you should install the required packages which are listed in section 2.

```
package option style is deprecated
use framemethod instead style
```

With version 0.9d `mdframed` changed the meaning of the option `style`. The option is used to load a defined style by `\mdfdefinestyle`. Instead use `framemethod` (see section 5.1).

```
Unknown framemethod .... mdframed
```

The input string for the option `framemethod` is unknown. See section 5.1.

```
You have not loaded ntheorem yet
```

To use the option `ntheorem` you have to load the package `ntheorem`.

```
You have only a width of 3cm
```

The package `mdframed` calculates the width of the contents based on the given options. If the width of the contents is smaller than 3cm you will get this warnings. You should change the settings to get a greater width.

```
You got a bad break
you have to change it manually
by changing the text, the space
or something else
```

Sometimes you have enough vertical space for the rules and the space between the rules and the contents but not for the contents itself. In this situation you will get this warning because the contents of this box is empty. You have the possibility to change the settings or include a `\clearpage` in front of the environment `mdframed`. So far I have no idea how to avoid such things.

```
You got a bad break
because the split box is empty
You have to change the page settings
like enlargethispage or something else
You got a bad break
```

See the explanation above.

```
You got a bad break
because the last split box is empty
You have to change the settings
```

The same reason as above but only in the last box.

```
Option ... is already consumed
and has no effect on input line ...
```

If you set a global option inside the document body you will get this warning.

8. Known Problems

In this section I will collect known problems. In case you encounter any further problems, please drop me an email, [marco.daniel at mada-nada.de](mailto:marco.daniel@mada-nada.de).

Do you have any ideas / wishes on further extensions to this package? Please let me know!

1. So far the environment isn't compatible with the package `gmverb`.
2. If you load the package `picins` the frame will no be splitted. That based on a problem of the package 'picins' which defines `\@capytype` global. To work with the package `picins` you can use the following hack.

```
\usepackage{picins}
\makeatletter
\let\@capytype\@undefined
\def\newcaption{%
\begingroup%
\def\@capytype{figure}%
\refstepcounter\@capytype\@dblarg{\@newcaption\@capytype}%
\endgroup%
}
\makeatother
```

9. ToDo

It is important to update the documentation

1. see "Known Problems".
2. So far it isn't possible to combine the environment `\begin{multicols}` of the package `multicol` with `mdframed` with the whole option list.
3. Create new styles.
4. Improve page breaks.
5. Improve footnotes.
6. Improve documentation and examples.
7. Create styles for `frametitle`.
8. Create an inline version of `mdframed` that's works like `\fbox`
9. Add `\ht\strutbox` to file `md-frame-1.mdf`

10. Acknowledgements

Dick Nickalls; Dietrich Grau; Piazza Luca; Jobst Hoffmann; Martin Scharrer; Enrico Gregorio; Heiko Oberdiek; Philipp Stephani.

Thanks for proofreading

Alan Munn and Nahid Shajari

I hope I forgot nobody.

A. More information

In the following section I want to present how to create your own frame.

A.1. How does `mdframed` work?

With the environment `\begin{mdframed} ... \end{mdframed}` the whole contents will be saved in a `\savebox` called `\mdf@splitbox@one`. After the calculation of the width and the height of the `\mdf@splitbox@one` (done by `mdframed.sty`) the box will be set sequentially (done by `md-frame-X.mdf`). The following figure demonstrates this.

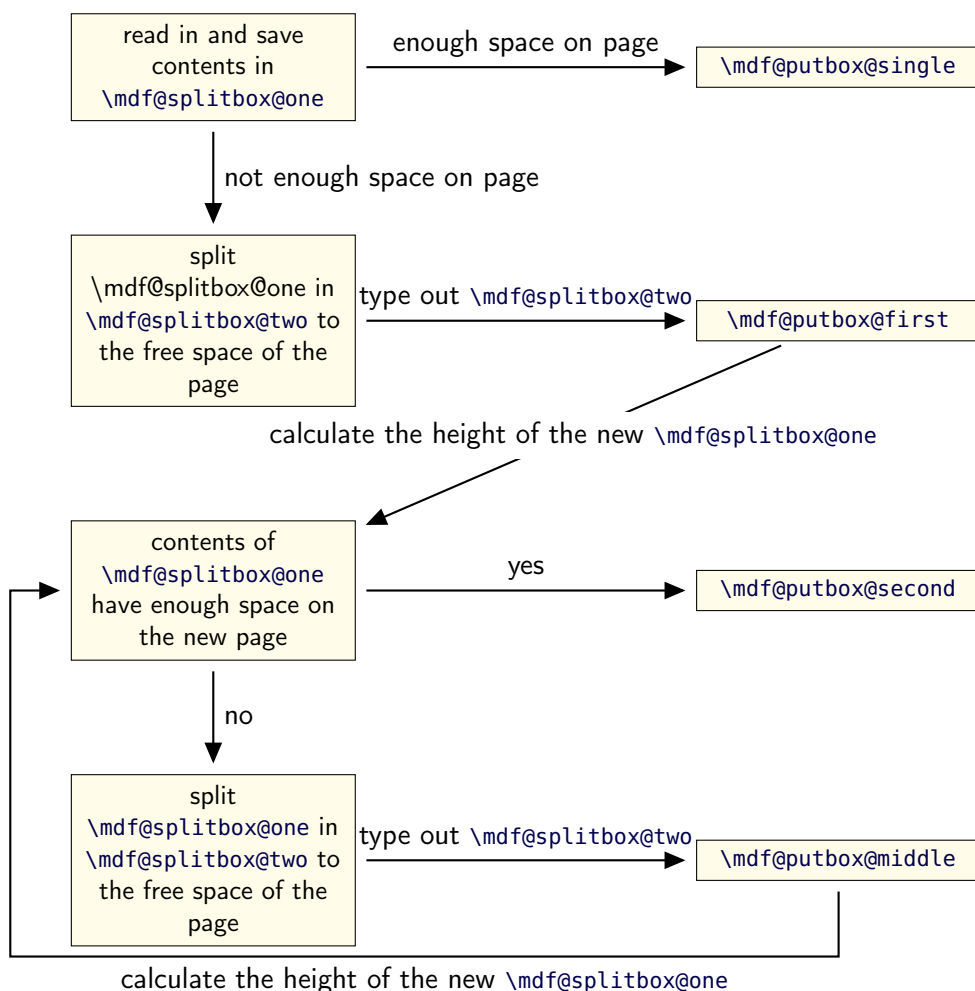


Figure 3: Setting the contents of `mdframed`

The width of the contents is the result of the settings of `leftmargin`, `rightmargin`, `linewidth`, `innerleftmargin` and `innerrightmargin` (see figure (2)).

A.2. The Framecommands

The package `mdframed` knows four kinds of “Framecommand”. These commands tell \LaTeX how to set the contents of `mdframed`.

`\mdf@putbox@single` This command sets the contents of a single unsplit frame.

`\mdf@putbox@first` This command sets the contents of the first frame of a split frame.

`\mdf@putbox@middle` This command sets the contents of the middle frame of a split frame.

`\mdf@putbox@second` This command sets the contents of the last frame of a split frame.

Using the explained commands we give an example. The command `\box` uses the contents of the `savebox` and types them out.

First we want to type out the single box without any settings (but with the calculated width).

```
\makeatletter
\def\mdf@putbox@single{\box\mdf@splitbox@one}
\makeatother
```

I am using the command `\leftline` to start the “Framcommands” at the left.

```
\makeatletter
\def\mdf@putbox@single{\leftline{\box\mdf@splitbox@one}}
\makeatother
```

Now you have to know how the lengths are named. Every length which can be modified by the options has the following syntax:

```
\mdf@<Name of the Length>@length
```

For example the `leftmargin` is:

```
\mdf@leftmargin@length
```

To create only a line at the left with the correct `leftmargin` you can set `\mdf@putboxsingle` as follows

```
\makeatletter
\def\mdf@putbox@single{%
  \leftline{%
    \hspace*{\mdf@leftmargin@length}%
    \rule[-\dp\mdf@splitbox@one]{\mdf@linewidth}%
    {\ht\mdf@splitbox@one+\dp\mdf@splitbox@one}%
    \box\mdf@splitbox@one
  }%
}
\makeatother
```

In this way you can do what you want. If you create your own style you can save the file as `md-frame-X.mdf`. `X` must be an integer. In this way you can use the option `framemethod` to load the file by setting `framemethod=X`.

A.3. Revision history

Version 1.5 submitted DD MM 2012

- fixed bug (Thanks Nicolas Roy) • expanded documentation (Thanks Martin Wilhelm Leidig)
- added options `singleextra`, `firstextra`, `middleextra` and `secondextra` • expanded examples

Version 1.4d submitted 30 Mar 2012

- fixed bug (Thanks Nicolas Roy) • added approach to documentation to work with `picins`
- new implementation of option `hidealllines`, now you can set `\mdfsetup{hidealllines=true,leftline=true}` printing only the left line (inspired by Tobias Schwan) • added option `everyline` to draw a top and bottom line at splitted frames

Version 1.4 submitted 4 Mar 2012

- fixed bug in combination with `\marginpar` (Thanks Juan Carlos Trujillo Ortega) • fixed bug with option `font`
- fixed bug inside `frametitle` (Thanks Yi, Hoze) • removed unnecessary groups (Thanks Yi, Hoze) • changed the definition of `listings` to allow copy paste of the examples

Version 1.3a submitted 5 Feb 2012

- fixed bug (Thanks to Dietrich Grau)

Version 1.3 submitted 4 Feb 2012

- fixed documentation (Thanks to Dietrich Grau) • added option `shadow` • improved handling `\parindent` and `\parskip` (Thanks to Enrico Gregorio and Joseph Wright)

Version 1.2 submitted 8 Jan 2012

- fixed documentation (Thanks to Dietrich Grau) • fixed bug in combination with `amsthm` • fixed bug in `\newmdtheoremenv` • defined new styles via `\newpsstyle`
- This works only with `framemethod=PSTricks`. • added new commands for interaction with TikZ and PSTricks
- expand frame title option by option `frametitulerule`, `frametitulerulewidth`, `frametitlefont`, `frametitleaboveskip`, `frametitlebelowskip`, `frametitlealignment` • removed limitation of three lines for PSTricks • defined new commands `\surroundwithmdframed`, `\mdflength`, `\mdtheorem` • load `xparse` by default
- changed internal names • expanded examples

Version 1.0b submitted 9 Dec 2011

- fixes documentation (Thanks to Dietrich Grau) • fixes bug in `\newmdtheoremenv` • fixes bug with overfull boxes (Thanks to Dietrich Grau) • defined `\newpsstylemdfbackgroundstyle` and `mdflinestyle`
- This works only with `framemethod=PSTricks`. • created `dtx`-file (Thanks to Kevin Godby) • added `\@parboxrestore` to `\mdf@lrbox`

Version 1.0 submitted 13 Nov 2011

- add option `userdefinedwidth` • add option `align` • add option `apptotikzsetting` • create new command `\mdfapptodefinestyle` • changed internal algorithm • removed `calc` instead using ε -TeX `\dimexpr` • expand documentation • trying to fixe problems with `xcolor` • fixed bug with `framemethod=pstricks` • create file `mdframed-example-default` • create file `mdframed-example-tikz` • create file `mdframed-example-pstricks` • create file `mdframed-example-texsx` (`texsx` stands for `tex stackexchange`)

Version 0.9g submitted 08 Oct 2011

- fixed documentation • added small footnote compatibility

Version 0.9f submitted 04 Oct 2011

- fixes bugs (thanks to Lars Madsen) • added option `hidealllines` • fixed documentation

Version 0.9e submitted 11 Sep 2011

- working with `twoside` modus

Version 0.9d submitted 10 Sep 2011

- **changed the meaning of the option `style`!!!** (inspired by Lars Madsen) • added option `framemethod` (inspired by Lars Madsen) • added options `needspace` (inspired by Lars Madsen) • added new command `\mdfdefinestyle` (inspired by Lars Madsen) • fixes documentation • renamed `md-frame-3.mdf` to `md-frame-2.mdf`

Version 0.9b submitted 7 Sep 2011

- fixes bugs in `\newmdtheoremenv` (Thanks to Enrico Gregorio)

Version 0.9a submitted 5 Sep 2011

- fixes bugs (Thanks to Lars Madson) • expanded documentation (added revision history)

Version 0.9 submitted 4 Sep 2011

- added option `nobreak` • detecting float environments to prevent split calculation • expand documentation (Thanks to Alan Munn)

Version 0.8a

- fixes bugs • fixes documentation

Version 0.8 submitted 22 Aug 2011

- added commands: `\newmdenv`, `\renewmdenv`, `\newmdtheoremenv` • fixes bugs • fixes documentation

Version 0.7a submitted 6 August 2011

- added option `frametitle` • added option `frametitlefont` • allow twocolumn-mode • changed the calculation
- added option `tikzsetting` • added options for hidden lines for all styles • fixes bugs

Version 0.6a submitted 22 Dec 2010

- fixes bugs • added `\mdfsetup` • expanded documentation

B. Implementation

And finally, here's how it all works...

B.1. The Explanation of mdframed.sty

Id : mdframed.dtx3752012-04-0810:52:22Zmarco Rev : 375 Author : marco

Date : 2012-04-0812:52:22+0200(So,08.Apr2012)

```
\mdversion
\mdframedpackagename
\mdf@maindate@svn
```

Set package information

```
1 \def\mdversion{v1.5}
2 \def\mdframedpackagename{mdframed}
3 \def\mdf@maindate@svn$#1: #2 #3 #4-#5-#6 #7 #8${#4/#5/#6\space }

4 \NeedsTeXFormat{LaTeX2e}
5 \ProvidesPackage{mdframed}%
6     [\mdf@maindate@svn$Id: mdframed.dtx 375 2012-04-08 10:52:22Z marco $%
7     \mdversion: \mdframedpackagename]
```

```
\mdf@PackageWarning
\mdf@PackageInfo
\mdf@LoadFile@IfExist
```

Set short form of `\PackageWarning`, `\PackageInfo` and `IfFileExists` in combination with `\RequirePackage`.

```
8 \newcommand*\mdf@PackageWarning[1]{\PackageWarning{\mdframedpackagename}{#1}}
9 \newcommand*\mdf@PackageInfo[1]{\PackageInfo{\mdframedpackagename}{#1}}
10 \newcommand*\mdf@LoadFile@IfExist[1]{%
11 \IfFileExists{#1.sty}{%
12     \RequirePackage{#1}%
13 }{%
14     \mdf@PackageWarning{The file #1 does not exist\MessageBreak
15         but needed by \mdframedpackagename\MessageBreak
16         see documentation fo further information
17     }%
18 }
19 }
```

Loading required packages

```
20 \RequirePackage{kvoptions}
21 \RequirePackage{xparse}
22 \RequirePackage{etoolbox}[2011/01/03]
23 \RequirePackage{zref-abspage}
24 \RequirePackage{color}
```

Set the family and the prefix of all options. (see documentation of `kvoptions`)

```
25 \SetupKeyvalOptions{family=mdf,prefix=mdf@}
```

```
\mdf@iflength
\mdf@iflength@check
\mdf@iflength@check
```

Command which checks the input of length options. If the length option is only a number the `defaultunit` will be used. Syntax: `\mdf@iflength{<Input>}{<length>}{<no length>}`

```

26 \newlength{\mdf@templength}
27 \def\mdf@iflength#1{%
28   \afterassignment\mdf@iflength@check%
29   \mdf@templength=#1\mdf@defaultunit\relax\relax
30   \expandafter\endgroup\next
31 }
32 \def\mdf@iflength@check#1{%
33   \begingroup
34   \ifx\relax#1\@empty
35     \def\next{\@secondoftwo}
36   \else
37     \def\next{\@firstoftwo}
38     \expandafter\mdf@iflength@cleanup
39   \fi
40 }
41 \def\mdf@iflength@cleanup#1\relax{}
```

`\mdf@dolist`

Loop used by `mdframed`.

```
42 \DeclareListParser*\mdf@dolist}{,}
```

`\mdf@option@length`
`\mdf@define@key@length`

Command to define a new length with a default value.

`\mdf@option@length{<Laengenbezeichnung>}{<Defaultwert>}`

```

43 \newrobustcmd*\mdf@option@length}[2]{%
44   \expandafter\newlength\csname mdf@#1@length\endcsname%
45   \expandafter\setlength\csname mdf@#1@length\endcsname{#2}%
46 }
```

Command to create a new length option. `\mdf@define@key@length{<Bezeichnung der Option der Laenge>}`

```

47 \newrobustcmd*\mdf@define@key@length}[1]{%
48   \define@key{mdf}{#1}{%
49     \def\@tempa{##1}
50     \mdf@iflength{\@tempa}%
51     {\csxdef{mdfl@#1}{\the\mdf@templength}}%
52     {\csxdef{mdfl@#1}{\the\mdf@templength}}%
53     \expandafter\setlength\csname mdf@#1@length\endcsname{\csname mdfl@#1\endcsname}%
54   }%
55 }
```

`\mdf@do@lengthoption`
`\mdf@lengthoption@doubledo`

The loop of `\mdf@dolist` expected one argument. So I have to define two commands to allow a loop with two arguments. The separation for the input is `==`.

```

56 \def\mdf@do@lengthoption#1{%
57   \mdf@lengthoption@doubledo#1\@nil%
58 }
59 \def\mdf@lengthoption@doubledo#1==#2\@nil{}
```

```

60 \mdf@option@length{#1}{#2}%
61 \mdf@define@key@length{#1}%
62 }

```

```

\mdf@do@stringoption
\mdf@stringoption@doubledo

```

Same as `\mdf@do@lengthoption` and `\mdf@lengthoption@doubledo`.

```

63 \def\mdf@do@stringoption#1{%
64   \mdf@stringoption@doubledo#1\@nil%
65 }
66 \def\mdf@stringoption@doubledo#1==#2\@nil{%
67   \expandafter\gdef\csname mdf@#1\endcsname{#2}%
68   \define@key{mdf}{#1}{%
69     \csdef{mdf@#1}{##1}%
70   }%
71 }

```

```

\mdf@do@booloption
\mdf@booloption@doubledo

```

Same as `\mdf@do@lengthoption` and `\mdf@lengthoption@doubledo`.

```

72 \def\mdf@do@booloption#1{%
73   \mdf@booloption@doubledo#1\@nil%
74 }
75 \def\mdf@booloption@doubledo#1==#2\@nil{%
76   \newbool{mdf@#1}\setbool{mdf@#1}{#2}%
77   \define@key{mdf}{#1}[#2]{%
78     \setbool{mdf@#1}{##1}%
79   }%
80 }

```

```

\mdf@do@alignoption
\mdf@alignoption@tripleo

```

Same as `\mdf@do@lengthoption` and `\mdf@lengthoption@doubledo`. Here three arguments are required.

```

81 \def\mdf@do@alignoption#1{%
82   \mdf@alignoption@tripleo#1\@nil%
83 }
84 \def\mdf@alignoption@tripleo#1==#2==#3\@nil{%
85   \csdef{mdf@align@#1@left}{\null\hspace*{#2}}%
86   \csdef{mdf@align@#1@right}{\hspace*{#3}\null}%
87 }

```

Start declaration of options

```

88 \newcounter{mdf@globalstyle@cnt}
89 \defcounter{mdf@globalstyle@cnt}{0}
90 \newcommand*\mdfglobal@style{0}

```

Only provide to be backward compatible

```

91 \define@key{mdf}{style}{%
92   \mdf@PackageWarning{package option style is deprecated^^J
93     use framemethod instead\MessageBreak}%
94   \renewcommand*\mdfglobal@style{#1}%

```

```

95     \defcounter{mdf@globalstyle@cnt}{#1}%
96     \ifcase\value{mdf@globalstyle@cnt}\relax
97         %0 <- kein Grafikpaket
98     \or\mdf@LoadFile@IfExist{tikz}%
99     \or\mdf@LoadFile@IfExist{pstricks-add}%
100    \or\defcounter{mdf@globalstyle@cnt}{2}%
101        \mdf@LoadFile@IfExist{pst-node}%
102    \or\mdf@LoadFile@IfExist{pst-node}%
103    \else\mdf@PackageWarning{Unknown global style \value{mdf@globalstyle@cnt}}%
104    \fi%
105 }

```

\mdf@framemethod

```

106 \providecommand*\mdf@framemethod{}
107 \def\mdf@framemethod@i{%
108 \def\mdf@framemethod@ii{%
109 \def\mdf@framemethod@iii{%

110 \define@key{mdf}{framemethod}[default]{%
111     \lowercase{\def\mdf@tempa{#1}}
112     \forcsvlist{\listadd\mdf@framemethod@i}{default,tex,latex,none,0}
113     \forcsvlist{\listadd\mdf@framemethod@ii}{pgf,tikz,1}
114     \forcsvlist{\listadd\mdf@framemethod@iii}{pstricks,ps,2,postscript}
115     \xifinlist{\mdf@tempa}{\mdf@framemethod@i}%
116         {\def\mdf@@framemethod{default}\defcounter{mdf@globalstyle@cnt}{0}}%
117     {\xifinlist{\mdf@tempa}{\mdf@framemethod@ii}%
118         {\def\mdf@@framemethod{tikz}\defcounter{mdf@globalstyle@cnt}{1}}%
119     {\xifinlist{\mdf@tempa}{\mdf@framemethod@iii}%
120         {\def\mdf@@framemethod{pstricks}\defcounter{mdf@globalstyle@cnt}{2}}%
121         {%
122             \mdf@LoadFile@IfExist{#1}%
123         }%
124     }%
125 }%
126 \ifcase\value{mdf@globalstyle@cnt}\relax%
127     %0 <- kein Grafikpaket
128     \or\mdf@LoadFile@IfExist{tikz}%
129     \or\mdf@LoadFile@IfExist{pst-node}%
130     \or\mdf@LoadFile@IfExist{pst-node}%
131 \fi%
132 }

```

\mdf@do@lengthoption

Here the declaration of the length option. The input method is explained above.

```

133 \mdf@dolist{\mdf@do@lengthoption}{%
134     {skipabove==\z@},%
135     {skipbelow==\z@},%
136     {leftmargin==\z@},%
137     {rightmargin==\z@},%
138     {innerleftmargin==10pt},%
139     {innerrightmargin==10pt},%

```

```

140 {innertopmargin==0.4\baselineskip},%
141 {innerbottommargin==0.4\baselineskip},%
142 {splittopskip==\z@},%
143 {splitbottomskip==\z@},%
144 {outermargin==\z@},%
145 {innermargin==\z@},%
146 {linewidth==0.4pt},%
147 {innerlinewidth==\z@},%
148 {middlelinewidth==\expandafter\mdf@linewidth@length},%
149 {outerlinewidth==\z@},%
150 {roundcorner==\z@},%
151 {footnotedistance==\medskipamount},
152 {userdefinedwidth==\linewidth},
153 {frametitleaboveskip==5pt},
154 {frametitlebelowskip==5pt},
155 {frametitlerulewidth==.2pt},
156 {frametitleleftmargin==10pt},%
157 {frametitlerightmargin==10pt},%
158 {shadowsize==8pt},%
159 }

```

`\mdf@do@lengthoption`

Here the declaration of the string option. The input method is explained above.

```

160 \mdf@dolist{\mdf@do@stringoption}{%
161   {frametitle=={}},%
162   {defaultunit==pt},%
163   {linecolor==black},%
164   {backgroundcolor==white},%
165   {fontcolor==black},%
166   {frametitlefontcolor==black},%
167   {innerlinecolor==\mdf@linecolor},%
168   {outerlinecolor==\mdf@linecolor},%
169   {middlelinecolor==\mdf@linecolor},%
170   {psroundlinecolor==\mdf@backgroundcolor},%
171   {frametitlerulecolor==\mdf@linecolor},
172   {frametitlebackgroundcolor==\mdf@backgroundcolor},%
173   {shadowcolor==black!50},%
174   {settings=={}},%
175   {frametitlesettings=={}},%
176   {font=={}},%
177   {frametitlefont==\normalfont\bfseries},%
178   {printheight==none},%
179   {alignment=={}},%
180   {frametitlealignment=={}},%
181   {theoremseparator=={:}},%
182   {theoremcountersep=={.}},%
183   {theoremtitlefont=={}},%
184   {theoremspace=={\space}},%
185   {singleextra=={}},
186   {firstextra=={}},
187   {middleextra=={}},
188   {secondextra=={}},
189 }

```



```
\mdf@do@booloption
```

Here the declaration of the string option. The input method is explained above.

```
190 \mdf@dolist{\mdf@do@booloption}{%
191   {ntheorem==false},%
192   {topline==true},%
193   {leftline==true},%
194   {bottomline==true},%
195   {rightline==true},%
196   {frametitletopline==true},%
197   {frametitleleftline==true},%
198   {frametitlebottomline==true},%
199   {frametitlerightline==true},%
200 %   {hidealllines==false},%
201   {frametitlerule==false},%
202   {nobreak==false},%
203   {footnoteinside==true},%
204   {usetwoside==true},%
205   {repeatframetitle==false},%Noch nicht richtig implementiert
206   {shadow==false},%
207   {everyline==false},%
208 }
209 %%special boolflag hidealllines:
210 \newbool{mdf@hidealllines}%
211 \define@key{mdf}{hidealllines}[false]{%
212 \setbool{mdf@hidealllines}{#1}%
213 \ifbool{mdf@hidealllines}{%
214   \setkeys{mdf}{leftline=false,topline=false,rightline=false,bottomline=false}%
215 }}{%
216 }
```

```
\mdf@do@alignoption
```

Here the declaration of the align option. The input method is explained above.

```
217 \mdf@dolist{\mdf@do@alignoption}{%
218   {left==\mdf@leftmargin@length==\z@},%
219   {center==\fill==\fill},%
220   {right==\fill==\mdf@rightmargin@length},%
221   {outer==\fill==\mdf@rightmargin@length},%not supported yet
222   {outer==\mdf@leftmargin@length==\fill},%not supported yet
223 }
```

```
\mdf@align
\mdf@makeboxalign@left
\mdf@makeboxalign@right
\mdf@makeboxalign@right
```

Set the alignment.

```
224 \newcommand*\mdf@align{%
225 \newcommand*\mdf@makeboxalign@left{\null\hspace*{\mdf@leftmargin@length}}%
226 \newcommand*\mdf@makeboxalign@right{%
227 \define@key{mdf}{align}[left]{%
228   \ifcsundef{mdf@align@#1@left}{%
229     \mdf@PackageWarning{Unknown alignment #1\MessageBreak}%
```

```

230     \letcs\mdf@makeboxalign@left{mdf@align@left@left}%
231     \letcs\mdf@makeboxalign@right{mdf@align@left@right}%
232   }{%
233     \def\mdf@makeboxalign@left{\csuse{mdf@align@#1@left}}%
234     \def\mdf@makeboxalign@right{\csuse{mdf@align@#1@right}}%
235   }%
236 }

```

```

\mdf@tikzset@local
\mdf@psset@local

```

Option to pass options to tikz or pstricks

```

237 \def\mdf@tikzset@local{\tikzset{tikzsetting/.style={}}}
238 \define@key{mdf}{tikzsetting}{%
239   \def\mdf@tikzset@local{\tikzset{tikzsetting/.style={#1}}}%
240 }
241 \define@key{mdf}{apptotikzsetting}{%
242   \appto\mdf@tikzset@local{#1}%
243 }
244 \def\mdf@psset@local{}
245 \define@key{mdf}{pstrickssetting}{%
246   \def\mdf@psset@local{#1}
247 }
248 \def\mdfpstricks@appendsettings{}
249 \define@key{mdf}{pstricksappsetting}{%
250   \def\mdfpstricks@appendsettings{#1}%
251 }
252

```

```

\mdf@xcolor

```

Problem with xcolor. This part must be reworked!

```

253 \def\mdf@xcolor{}
254 \define@key{mdf}{xcolor}[none]{%
255   \def\@tempa{#1}%
256   \ifpackageloaded{xcolor}{%
257     \let\mdf@xcolor\@empty %ignoriere die Eingabe der Optionen
258     \def\@tempa{}%
259   }{%
260     \ifx\relax\@tempa\relax\else
261       \PassOptionsToPackage{\mdf@xcolor}{xcolor}%
262       \RequirePackage{xcolor}%
263     \fi%
264 }%

```

```

\mdf@needspace

```

Defining the option needspace

```

265 \define@key{mdf}{needspace}[\z@]{%
266   \begingroup%
267     \setlength{\dimen@}{#1}%
268     \vskip\z@\@plus\dimen@
269     \penalty -100\vskip\z@\@plus -\dimen@%
270     \vskip\dimen@%

```

```

271     \penalty 9999%
272     \vskip -\dimen@%
273     \vskip\z@skip % hide the previous |\vskip| from |\addvspace|
274     \endgroup%
275 }

```

```

276 \DeclareDefaultOption{%
277   \mdf@PackageWarning{Unknown Option '\CurrentOption' for mdframed}}
278 \ProcessKeyvalOptions*\relax

```

\mdfsetup

Short form of `\setkeys{mdf}`

```

279 \newrobustcmd*{\mdfsetup}{\setkeys{mdf}}

```

\mdf@style

Redefinition of the option `style` to use the key in combination with `mdfdefinedstyle`.

```

280 \define@key{mdf}{style}{%
281   \ifcsundef{mdf@definestyle@#1}{%
282     \mdf@PackageWarning{Unknown definedstyle #1^^J
283       You have to define a style ^^J
284       via \string\mdfdefinedstyle\MessageBreak
285     }%
286   }%
287   {\expandafter\expandafter\expandafter\mdfsetup%
288     \expandafter\expandafter\expandafter{\csname mdf@definestyle@#1\endcsname}}%
289 }%

```

\mdf@print@space

Option to type out the free vertical space of the current page.

```

290 \let\mdf@PackageNoInfo\@gobble
291 \newrobustcmd*\mdf@ifstrequal@expand{%
292   \expandafter\ifstrequal\expandafter{\mdf@printheight}%
293 }
294 \newrobustcmd*\mdf@print@space{%
295   %case "none"
296   \mdf@ifstrequal@expand{none}{\def\mdf@tempa{NoInfo}}{%
297     %case "info"
298     \mdf@ifstrequal@expand{info}{\def\mdf@tempa{Info}}{%
299       %case "warning"
300       \mdf@ifstrequal@expand{warning}{\def\mdf@tempa{Warning}}{%
301         %case "unknown"
302         \mdf@PackageWarning{Unknown key for printheight=\mdf@printheight^^J
303           use none, info or warning}%
304         \def\mdf@tempa{none}%
305       }%
306     }%
307   }%
308   \def\mdf@PackageInfoSpace{\csname mdf@Package\mdf@tempa\endcsname}%
309 }

```

`\new...`

Initialize all commands and length which will we used later

```

310 \newsavebox\mdf@frametitlebox
311 \newsavebox\mdf@footnotebox
312 \newsavebox\mdf@splitbox@one
313 \newsavebox\mdf@splitbox@two
314 \newlength\mdfsplitboxwidth
315 \newlength\mdfsplitboxtotalwidth
316 \newlength\mdfsplitboxheight
317 \newlength\mdfsplitboxdepth
318 \newlength\mdfsplitboxtotalheight
319 \newlength\mdfframetitleboxwidth
320 \newlength\mdfframetitleboxtotalwidth
321 \newlength\mdfframetitleboxheight
322 \newlength\mdfframetitleboxdepth
323 \newlength\mdfframetitleboxtotalheight
324 \newlength\mdffootnoteboxwidth
325 \newlength\mdffootnoteboxtotalwidth
326 \newlength\mdffootnoteboxheight
327 \newlength\mdffootnoteboxdepth
328 \newlength\mdffootnoteboxtotalheight
329
330 \newlength\mdftotallinewidth
331
332 \newlength\mdfboundingboxwidth
333 \newlength\mdfboundingboxtotalwidth
334
335 \newlength\mdfboundingboxheight
336 \newlength\mdfboundingboxdepth
337 \newlength\mdfboundingboxtotalheight
338
339 \newlength\mdf@freevspace@length
340 \newlength\mdf@horizontalwidthofbox@length
341 \newlength\mdf@verticalmarginwhole@length
342
343 % Command to expand the tikz code. (see md-frame-1.mdf)
344 \newrobustcmd\mdfcreateextratikz{}
345

```

`\mdf@lrbox`
`\endmdf@lrbox`

Modification of the default `\lrbox` and `\endlrbox`

```

346
347 \def\mdf@lrbox#1{%
348 %%patch to work with amsthm
349 \mdf@patchamsthm
350 %%end patch
351 \edef\mdf@restoreparams{%
352 \parindent=\the\parindent \parskip=\the\parskip}
353 \setbox#1\vbox\bgroup
354 \color@begingroup%
355 \mdf@horizontalmargin@equation%

```

```

356 \columnwidth=\hsize%
357 \textwidth=\hsize%
358 \@parboxrestore%
359 \mdf@restoreparams%
360 %SETZE
361 \@afterindentfalse%
362 \@afterheading%
363 %STREICHE
364 %\@doendpe
365 }
366
367 \def\endmdf@lrbbox{\color@endgroup\egroup}
368

```

```

\mdf@ignorevbadness
\mdf@restorevbadness

```

Avoiding warnings during the splitting process by `\vsplit`. see [How to avoid underfull vbox in combination with \vsplit?](#)

```

369 \newrobustcmd*\mdf@ignorevbadness{%
370 \edef\mdf@currentvbadness{\the\vbadness}%
371 \vbadness=\@M%
372 \afterassignment\mdf@restorevbadness}
373 \newrobustcmd*\mdf@restorevbadness{\vbadness=\mdf@currentvbadness\relax}

```

```

\mdf@patchamsth

```

The package `amsthm` provides a not compatible starting of theorem. So I have to change the header of `amsthm`.

```

374 \ifpackageloaded{amsthm}{%
375 \newrobustcmd\mdf@patchamsth{%
376 \let\mdf@deferred@thm@head\deferred@thm@head
377 \patchcmd{\deferred@thm@head}{\indent}{}%
378 {\mdf@PackageInfo{mdframed detected package amsthm ^^J
379 changed the theoerem header of amsthm\MessageBreak}%
380 }{%
381 \mdf@PackageInfo{mdframed detected package amsthm ^^J
382 changed the theoerem header of amsthm failed\MessageBreak}%
383 }%
384 }%
385 }{\let\mdf@patchamsth\relax}%

```

```

\mdf@trivlist
\endmdf@trivlist

```

Modification of the default `\trivlist` and `\endtrivlist`.

```

386 \def\mdf@trivlist#1{%
387 \setlength{\topsep}{#1}%
388 \partopsep\z@%
389 \parsep\z@%
390 \@nmbulistfalse%
391 \@trivlist%
392 \labelwidth\z@%

```

```

393 \leftmargin\z@%
394 \itemindent\z@%
395 \let\@itemlabel\@empty%
396 \def\makelabel##1{##1}%
397 %% \item\leavevmode\hrule \@height\z@ \@width\linewidth\relax%
398 %% \item\mbox{}\relax% second version
399 \item\relax% first Version
400 }
401 \let\endmdf@trivlist\endtrivlist
402 \patchcmd\endmdf@trivlist\@endparenv\mdf@endparenv{}{}
403 \def\mdf@endparenv{%
404 \addpenalty\@endparpenalty\addvspace\mdf@skipbelow@length\@endpetrue}
405

```

```

\mdf@makebox@out
\mdf@makebox@in

```

```

406 \newrobustcmd*\mdf@makebox@out[2][\linewidth]{%
407 \noindent\hb@xt@\z@{%
408 \noindent\makebox[\dimexpr #1\relax][l]{#2}%
409 \hss}%
410 }%
411 \newrobustcmd*\mdf@makebox@in[2][\mdf@userdefinedwidth@length]{%
412 \noindent\makebox[\dimexpr #1\relax][l]{#2}%
413 }

```

```

\mdfdefinestyle
\mdfapptodefinestyle

```

See explanation of this commands above.

```

414 \newrobustcmd*\mdfdefinestyle[2]{%
415 \csdef{mdf@definestyle@#1}{#2}%
416 }
417 \newrobustcmd*\mdfapptodefinestyle[2]{%
418 \ifcsundef{mdf@definestyle@#1}%
419 {\mdf@PackageWarning{Unknown style #1}}%
420 {\csappto{mdf@definestyle@#1}{, #2}}%
421 }

```

```

\mdflength
\surroundwithmdframed

```

Helper macros to work with `mdframed`

```

422 \newrobustcmd*\mdflength[1]{\csuse{mdf@#1@length}}
423
424 \newrobustcmd*\surroundwithmdframed[2][]{%
425 \BeforeBeginEnvironment{#2}{\begin{mdframed}}{#1}%
426 \AfterEndEnvironment{#2}{\end{mdframed}}%
427 }

```

<pre> \newmdenv \renewmdenv \newmdtheoremenv \mdtheorem </pre>
--

Defining of the new environment defintions.

```

428 \newrobustcmd*\newmdenv[2][]{%
429   \newenvironment{#2}{%
430     \mdfsetup{#1}%
431     \begin{mdframed}%
432   }{%
433     \end{mdframed}%
434   }%
435 }
436 \newrobustcmd*\renewmdenv[2][]{%
437   \expandafter\let\csname #2\endcsname\relax%
438   \expandafter\let\csname end#2\endcsname\relax%
439   \newmdenv[#1]{#2}%
440   }%
441
442
443 \DeclareDocumentCommand\newmdtheoremenv{0}{ m o m o }{%
444   \ifboolexpr{ test {IfNoValueTF {#3}} and test {IfNoValueTF {#5}} }{%
445     {\newtheorem{#2}{#4}}{%
446       \IfValueTF{#3}{\newtheorem{#2}[#3]{#4}}{%
447         \IfValueTF{#5}{\newtheorem{#2}[#4][#5]}{%
448           }%
449       \BeforeBeginEnvironment{#2}{%
450         \begin{mdframed}[#1]}%
451       \AfterEndEnvironment{#2}{%
452         \end{mdframed}}%
453     }
454
455 \DeclareDocumentCommand{\mdtheorem}{ 0{ } m o m o }%
456 {\ifcsdef{#2}%
457   {\mdf@PackageWarning{Environment #2 already exists\MessageBreak}}%
458   {%
459     \IfNoValueTF {#3}%
460     {%#3 not given -- number relationship
461       \IfNoValueTF {#5}
462       {%#3+#5 not given
463         \@definecounter{#2}%
464         \expandafter\xdef\csname the#2\endcsname{\@thmcounter{#2}}
465         \newenvironment{#2}[1][]{%
466           \refstepcounter{#2}
467           \ifstrempy{##1}%
468             {\let\@temptitle\relax}%
469             {%
470               \def\@temptitle{\mdf@theoremseparator%
471                 \mdf@theoremspace%
472                 \mdf@theoremtitlefont%
473                 ##1}%
474             }
475           \begin{mdframed}[#1,frametitle={\strut#4 \csname the#2\endcsname\@temptitle}]}%
476           {\end{mdframed}}%
477         \newenvironment{#2*}[1][]{%

```

```

478     \ifstrempy{##1}{\let\@temptitle\relax}{\def\@temptitle{: \ ##1}}
479     \begin{mdframed}[#1,frametitle={\strut#4\@temptitle}]}%
480     {\end{mdframed}}%
481 }%
482 {%#5 given -- reset counter
483 \@definecounter{#2}\@newctr{#2}[#5]%
484 \expandafter\xdef\csname the#2\endcsname{\@thmcounter{#2}}
485 \expandafter\xdef\csname the#2\endcsname{%
486     \expandafter\noexpand\csname the#5\endcsname \@thmcountersep
487     \@thmcounter{#2}}%
488 \newenvironment{#2}[1][]{%
489     \refstepcounter{#2}
490     \ifstrempy{##1}%
491     {\let\@temptitle\relax}%
492     {%
493         \def\@temptitle{\mdf@theoremseparator%
494             \mdf@theoremspace%
495             \mdf@theoremtitlefont%
496             ##1}%
497     }
498     \begin{mdframed}[#1,frametitle={\strut#4 \csname the#2\endcsname\@temptitle}]}%
499     {\end{mdframed}}%
500 \newenvironment{#2*}[1][]{%
501     \ifstrempy{##1}%
502     {\let\@temptitle\relax}%
503     {%
504         \def\@temptitle{\mdf@theoremseparator%
505             \mdf@theoremspace%
506             \mdf@theoremtitlefont%
507             ##1}%
508     }
509     \begin{mdframed}[#1,frametitle={\strut#4\@temptitle}]}%
510     {\end{mdframed}}%
511 }%
512 }%
513 {%#3 given -- number relationship
514 \global\@namedef{the#2}{\@nameuse{the#3}}%
515 \newenvironment{#2}[1][]{%
516     \refstepcounter{#3}
517     \ifstrempy{##1}%
518     {\let\@temptitle\relax}%
519     {%
520         \def\@temptitle{\mdf@theoremseparator%
521             \mdf@theoremspace%
522             \mdf@theoremtitlefont%
523             ##1}%
524     }
525     \begin{mdframed}[#1,frametitle={\strut#4 \csname the#2\endcsname\@temptitle}]}%
526     {\end{mdframed}}%
527 \newenvironment{#2*}[1][]{%
528     \ifstrempy{##1}{\let\@temptitle\relax}{\def\@temptitle{: \ ##1}}
529     \begin{mdframed}[#1,frametitle={\strut#4\@temptitle}]}%
530     {\end{mdframed}}%
531 }%
532 }%
533 }

```


534

```

\mdfframedtitleenv
\mdf@@frametitle
\mdf@setopt@body
\mdf@setopt@title

```

Default definition of the frame tile used by *mdframed*.

```

535 %TESTVERSION
536 % \newrobustcmd*\mdf@setopt@title{%
537 % \ifbool{mdf@frametitlerule}{\booltrue{mdf@bottomline}}{\boolfalse{mdf@bottomline}}%
538 % \let\ifmdf@leftline\ifmdf@frametitleleftline%
539 % \let\ifmdf@topline\ifmdf@frametitletopline%
540 % \let\ifmdf@rightline\ifmdf@frametitlerightline%
541 % \let\ifmdf@bottomline\ifmdf@frametitlebottomline%
542 % \mdfsetup{innerbottommargin=\mdf@titlebelowskip@length,%
543 %         innertopmargin=\mdf@titleaboveskip@length,%
544 %         middlelinecolor=\mdf@frametitlerulecolor,%
545 %         backgroundcolor=\mdf@frametitlebackgroundcolor,%
546 %         middlelinewidth=\mdf@frametitlerulewidth@length,%
547 %         innerleftmargin=\mdf@frametitleleftmargin@length,%
548 %         innerrightmargin=\mdf@frametitlerightmargin@length,%
549 %         alignment=\mdf@frametitlealignment,%
550 %         skipbelow=\z@}%
551 % \def\mdf@linecolor@bottom{\color{\mdf@frametitlebottomrulecolor}}%
552 % \mdf@frametitlesettings%
553 % }
554 %
555 % \newrobustcmd*\mdf@setopt@body{%
556 % \mdfsetup{topline=false,skipabove=\z@}%
557 % \unskip\nointerlineskip%
558 % }
559 %
560 % \newrobustcmd\mdfframedtitleenv[1]{%
561 % \begingroup
562 % \mdf@setopt@title
563 % \color@setgroup
564 % \mdf@frametitlefont
565 % \mdf@lrbox{\mdf@splitbox@one}%
566 % \mdf@frametitlealignment
567 % #1\par\unskip
568 % \endmdf@lrbox
569 % \mdf@ignorevbadness
570 % \global\setbox\mdf@frametitlebox\vbox{\unvbox\mdf@splitbox@one}%
571 % \mdf@ignorevbadness
572 % \global\setbox\mdf@splitbox@one\vbox{\unvcopy\mdf@frametitlebox}%
573 % \detected@mdf@put@frame%
574 % \color@endgroup%
575 % \endgroup
576 % }
577 % \newrobustcmd\mdfframedtitleenv[1]{%
578 % \color@begingroup%
579 % \mdf@lrbox{\mdf@frametitlebox}%
580 % \mdf@frametitlealignment%

```

```

581     \color{\mdf@frametitlefontcolor}%
582     \normalfont\mdf@frametitlefont{#1}\par\unskip
583   \endmdf@lrbox%
584 \mdf@ignorevbadness%
585 \global\setbox\mdf@frametitlebox\vbox{\unvbox\mdf@frametitlebox}%
586 \global\mdfframetitleboxwidth=\wd\mdf@frametitlebox\relax%
587 \global\mdfframetitleboxheight=\ht\mdf@frametitlebox\relax%
588 \global\mdfframetitleboxdepth=\dp\mdf@frametitlebox\relax%
589 \global\mdfframetitleboxtotalheight=\dimexpr\ht\mdf@frametitlebox+\dp\mdf@frametitlebox
590     +\mdf@frametitleaboveskip@length+\mdf@frametitlebelowskip@length\relax%
591   \color@endgroup%
592 }
593
594 \newrobustcmd*\mdf@@frametitle{%
595   \mdfframetitleenv{\mdf@frametitle}%
596 }
597
598 \newrobustcmd*\mdf@@frametitle@use{%
599   \begingroup
600   \parskip\z@
601   \parindent\z@
602   \offinterlineskip
603   \mdf@ignorevbadness%
604   \global\setbox\mdf@splitbox@one\vbox{%
605     \unvcopy\mdf@frametitlebox%
606     \mdf@@frametitlerule%
607     \unvbox\mdf@splitbox@one
608   }%
609   \mdf@ignorevbadness%
610   \global\setbox\mdf@splitbox@one\vbox{%
611     \unvbox\mdf@splitbox@one}%
612   \endgroup
613   \mdfsetup{innertopmargin=\mdf@frametitleaboveskip@length}%
614 }

```

`\mdf@checkntheorem`

Command which checks only `ntheorem`. Later I will support also `thmtools`.

```

615
616 \newrobustcmd*\mdf@checkntheorem{%
617   \ifbool{mdf@ntheorem}%
618     {\ifundef{\theorempreskipamount}%
619       {\mdf@PackageWarning{You have not loaded ntheorem yet}}%
620       {\setlength{\theorempreskipamount}{\z@}%
621         \setlength{\theorempostskipamount}{\z@}%
622       }%
623     }{}%
624 }

```

`\mdf@footnoterule`
`\mdf@footnoteoutput`
`\mdf@footnoteinput`

Support for footnotes.

```

625 \newrobustcmd*\mdf@footnoterule{%

```

```

626 \kern0\p@%
627 \hrule \@width 1in \kern 2.6\p@}
628 \newrobustcmd*\mdf@footnoteoutput{%
629 \ifvoid\@mpfootins\else
630 \nobreak%
631 \vskip\mdf@footnotedistance@length%
632 \normalcolor%
633 \mdf@footnoterule
634 \unvbox\@mpfootins
635 \fi%
636 }
637 \newrobustcmd*\mdf@footnoteinput{%
638 \def\@mpfn{mpfootnote}%
639 \def\thempfn{\thempfootnote}%
640 \c@mpfootnote\z@%
641 \let\@footnotetext\@mpfootnotetext%
642 }

```

```

\mdf@load@style
\mdf@styledefinition

```

Load the method to draw the frame and set style definition.

```

643 \newrobustcmd*\mdf@load@style{%
644 \ifcase\value{mdf@globalstyle@cnt}\relax%
645 \input{md-frame-0.mdf}%
646 \or\input{md-frame-1.mdf}%
647 \or\input{md-frame-2.mdf}%
648 \or\input{md-frame-3.mdf}%
649 \else%
650 \IfFileExists{md-frame-\value{mdf@globalstyle@cnt}.mdf}%
651 {\input{md-frame-\value{mdf@globalstyle@cnt}.mdf}}%
652 {%
653 \input{md-frame-0.mdf}%
654 \mdf@PackageWarning{The style number \value{mdf@globalstyle@cnt} does not exist^^J
655 \mdframed ues instead style=0 \mdframedpackage}%
656 }%
657 \fi%
658 }%
659 \mdf@load@style
660
661 \newrobustcmd*\mdf@styledefinition{%AVOID!!!
662 \ifnumequal{\value{mdf@globalstyle@cnt}}{0}%
663 {\deflength{\mdf@innerlinewidth@length}{\z@}%
664 \deflength{\mdf@middlelinewidth@length}{\mdf@linewidth@length}%
665 \deflength{\mdf@outerlinewidth@length}{\z@}%
666 \let\mdf@innerlinecolor\mdf@linecolor%
667 \let\mdf@middlelinecolor\mdf@linecolor%
668 \let\mdf@outerlinecolor\mdf@linecolor%
669 }{}%
670 % \ifnumequal{\value{mdf@globalstyle@cnt}}{2}%
671 % {\deflength{\mdf@innerlinewidth@length}{\z@}%
672 % \deflength{\mdf@middlelinewidth@length}{\mdf@linewidth@length}%
673 % \deflength{\mdf@outerlinewidth@length}{\z@}%
674 % \let\mdf@innerlinecolor\mdf@linecolor%
675 % }{}%

```

```

676 % \ifnumequal{\value{mdf@globalstyle@cnt}}{3}%
677 % {\deflength{\mdf@innerlinewidth@length}{\z@}%
678 % \deflength{\mdf@middlelinewidth@length}{\mdf@linewidth@length}%
679 % \deflength{\mdf@outerlinewidth@length}{\z@}%
680 % \let\mdf@innerlinecolor\mdf@linecolor%
681 % }{}%
682 }

```

\detected@mdf@put@frame

Detect whether inside a non breakable environment.

```

683 \let\mdf@reserved@a\@empty
684 \newrobustcmd*\detected@mdf@put@frame{%
685 \ifmdf@nobreak%Option nobreak=true?
686 \def\mdf@reserved@a{\mdf@put@frame@standalone}%
687 \else
688 \def\mdf@reserved@a{\mdf@put@frame}%
689 \ifx\@cuptype\@undefined
690 \def\mdf@reserved@a{\mdf@put@frame}%
691 \else
692 \mdf@PackageInfo{mdframed inside float ^^J
693 mdframed uses option nobreak \mdframedpackagename}%
694 \def\mdf@reserved@a{\mdf@put@frame@standalone}%
695 \fi
696 %% \ifnum\@floatpenalty<0\relax%Detecting float
697 %% \if@twocolumn%
698 %% \ifx\@cuptype\@undefined
699 %% \def\mdf@reserved@a{\mdf@put@frame}%
700 %% \else
701 %% \mdf@PackageInfo{mdframed inside float ^^J
702 %% mdframed uses option nobreak \mdframedpackagename}%
703 %% \def\mdf@reserved@a{\mdf@put@frame@standalone}%
704 %% \fi
705 %% \else
706 %% \mdf@PackageInfo{mdframed inside float ^^J
707 %% mdframed uses option nobreak \mdframedpackagename}%
708 %% \def\mdf@reserved@a{\mdf@put@frame@standalone}%
709 %% \fi%
710 %% \fi%
711 \if@minipage%
712 \mdf@PackageInfo{mdframed inside minipage ^^J
713 mdframed uses option nobreak \mdframedpackagename}%
714 \def\mdf@reserved@a{\mdf@put@frame@standalone}%
715 \fi%
716 \ifinner%
717 \mdf@PackageInfo{mdframed inside a box ^^J
718 mdframed uses option nobreak \mdframedpackagename}%
719 \def\mdf@reserved@a{\mdf@put@frame@standalone}%
720 \fi%
721 \fi%
722 \mdf@reserved@a%
723 }

```

\mdf@hidealllines@check

```

724 \newrobustcmd*\mdf@hidealllines@check{%
725   \ifbool{mdf@hidealllines}{%
726     \boolfalse{mdf@leftline}\boolfalse{mdf@rightline}%
727     \boolfalse{mdf@topline}\boolfalse{mdf@bottomline}%
728     \boolfalse{mdf@frametitleleftline}\boolfalse{mdf@frametitlerightline}%
729     \boolfalse{mdf@frametitletopline}\boolfalse{mdf@frametitlebottomline}%
730   }{%
731 }

```

<pre> \mdframed \mdframed@ii \mdframed@i </pre>

That the user environment.

```

732 \newenvironment{mdframed}[1][[]]{%
733   \color@begingroup%
734   \mdfsetup{userdefinedwidth=\linewidth,#1}%
735   %% \mdf@hidealllines@check%
736   \mdf@twoside@checklength%
737   \let\width\z@%
738   \let\height\z@%
739   \mdf@checkntheorem%
740   \mdf@styledefinition%
741   \mdf@footnoteinput%
742   \color{\mdf@fontcolor}%
743   \mdf@font%
744   \ifvmode\nointerlineskip\fi%
745   \mdf@trivlist{\mdf@skipabove@length}%%
746   \ifdefempty{\mdf@frametitle}{\mdf@@frametitle}%
747   \mdf@settings%
748   \mdf@lrbox{\mdf@splitbox@one}%
749 }%
750 {\par\unskip\ifvmode\nointerlineskip\hrule \@height\z@ \@width\hsize\fi%
751   \ifmdf@footnoteinside%
752     \def\mdf@reserveda{%
753       \mdf@footnoteoutput%
754       \endmdf@lrbox%
755       \ifdefempty{\mdf@frametitle}{\mdf@@frametitle@use}
756       \detected@mdf@put@frame}%
757   \else%
758     \def\mdf@reserveda{%
759       \endmdf@lrbox%
760       \ifdefempty{\mdf@frametitle}{\mdf@@frametitle@use}
761       \detected@mdf@put@frame%
762       \mdf@footnoteoutput%
763     }%
764   \fi%
765   \mdf@reserveda%
766   \endmdf@trivlist%
767   \color@endgroup\@doendpe%
768 }
769
770

```

```

\mdf@twoside@checklength
\mdf@zref@label
\if@mdf@pageodd
\mdf@pageisodd
\mdf@pageiseven
\mdf@@setzref

```

The whole bunch is used to work width twoside mode and uses the correct margins.

```

771 \newtoggle{md:checktwoside}
772 \settoggle{md:checktwoside}{false}
773 \newrobustcmd*\mdf@twoside@checklength{%
774 \if@twoside
775 \ifbool{mdf@usetwoside}%
776 {\mdf@PackageInfo{mdframed works in twoside mode}%
777 \settoggle{md:checktwoside}{true}%
778 \setlength\mdf@rightmargin@length{\mdf@outermargin@length}%
779 \setlength\mdf@leftmargin@length{\mdf@innermargin@length}%
780 }%
781 {\mdf@PackageInfo{mdframed inside twoside mode but\MessageBreak
782 works with oneside mode}%
783 \settoggle{md:checktwoside}{false}%
784 }%
785 \fi%
786 }
787
788 \newcounter{mdf@zref@counter}%keine doppelten laebes
789 \zref@newprop*\mdf@pagevalue}[0]{\number\value{page}}
790 \zref@addprop{\ZREF@mainlist}{mdf@pagevalue}
791 \newrobustcmd*\mdf@zref@label{%
792 \stepcounter{mdf@zref@counter}
793 \zref@label{mdf@pagelabel-\number\value{mdf@zref@counter}}%
794 }
795 \newrobustcmd*\if@mdf@pageodd{%
796 \zref@refused{mdf@pagelabel-\the\value{mdf@zref@counter}}%
797 \ifodd\zref@extract{mdf@pagelabel-\the\value{mdf@zref@counter}}{mdf@pagevalue}%
798 \setlength\mdf@rightmargin@length{\mdf@outermargin@length}%
799 \setlength\mdf@leftmargin@length{\mdf@innermargin@length}%
800 \else
801 \setlength\mdf@rightmargin@length{\mdf@innermargin@length}%
802 \setlength\mdf@leftmargin@length{\mdf@outermargin@length}%
803 \fi%
804 }
805 \newrobustcmd*\mdf@@setzref{%
806 \iftoggle{md:checktwoside}{\mdf@zref@label\if@mdf@pageodd}{}%
807 }

```

```

\mdf@freepagevspace

```

```

808 \newrobustcmd*\mdf@freepagevspace{%
809 \penalty@M \vskip 2\baselineskip
810 \penalty9999 \vskip -2\baselineskip
811 \penalty9999
812 \ifdimequal{\pagegoal}{\maxdimen}%

```

```

813     {\mdf@freevspace@length\vsize}%
814     {\mdf@freevspace@length=\pagegoal\relax%
815     \advance\mdf@freevspace@length by -\pagetotal\relax%
816     \addtolength\mdf@freevspace@length{\dimexpr-\parskip\relax}\relax%
817     }%
818 }

```

```

\mdf@advancelength@horizontalmargin@add
\mdf@horizontalsofbox
\mdf@horizontalmargin@equation

```

Width of the box

```

819 \newrobustcmd*\mdf@advancelength@horizontalmargin@sub[1]{%
820   \advance\mdf@horizontalsofbox by -\csname mdf@#1@length\endcsname\relax%
821 }
822 \newlength\mdf@horizontalsofbox
823 \newrobustcmd*\mdf@horizontalmargin@equation{%
824   \setlength{\mdf@horizontalsofbox}{\mdf@userdefinedwidth@length}%
825   \mdf@dolist{\mdf@advancelength@horizontalmargin@sub}{%
826     leftmargin,outerlinewidth,middlelinewidth,%
827     innerlinewidth,innerleftmargin,innerrightmargin,%
828     innerlinewidth,middlelinewidth,outerlinewidth,%
829     rightmargin}%
830   \notbool{mdf@leftline}{%
831     \advance\mdf@horizontalsofbox by \mdf@innerlinewidth@length\relax%
832     \advance\mdf@horizontalsofbox by \mdf@middlelinewidth@length\relax%
833     \advance\mdf@horizontalsofbox by \mdf@outerlinewidth@length\relax%
834   }{}%
835   \notbool{mdf@rightline}{%
836     \advance\mdf@horizontalsofbox by \mdf@innerlinewidth@length\relax%
837     \advance\mdf@horizontalsofbox by \mdf@middlelinewidth@length\relax%
838     \advance\mdf@horizontalsofbox by \mdf@outerlinewidth@length\relax%
839   }{}%
840   \ifdimless{\mdf@horizontalsofbox}{3cm}%
841     {\mdf@PackageWarning{You have only a width of 3cm}}{}
842   \hsize=\mdf@horizontalsofbox%
843 }

```

```

\mdf@keeplines@single

```

horizontal space in relation of the lines.

```

844 \newrobustcmd*\mdf@keeplines@single{%
845   \notbool{mdf@topline}{%
846     \advance\mdf@verticalmarginwhole@length by -\mdf@innerlinewidth@length%
847     \advance\mdf@verticalmarginwhole@length by -\mdf@middlelinewidth@length%
848     \advance\mdf@verticalmarginwhole@length by -\mdf@outerlinewidth@length%
849   }{}%
850   \notbool{mdf@bottomline}{%
851     \advance\mdf@verticalmarginwhole@length by -\mdf@innerlinewidth@length%
852     \advance\mdf@verticalmarginwhole@length by -\mdf@middlelinewidth@length%
853     \advance\mdf@verticalmarginwhole@length by -\mdf@outerlinewidth@length%
854   }{}%
855 }

```

```
\mdf@advancelength@verticalmarginwhole
\mdf@advancelength@freevspace@sub
\mdf@advancelength@freevspace@add
```

Loop macros to calculate the height. Used by `\mdf@dolist`.

```
856 \newrobustcmd*\mdf@advancelength@verticalmarginwhole[1]{%
857   \advance\mdf@verticalmarginwhole@length by \csname mdf@#1@length\endcsname\relax%
858 }
859 \newrobustcmd*\mdf@advancelength@freevspace@sub[1]{%
860   \advance\dimen@ by -\csname mdf@#1@length\endcsname\relax%
861 }
862 \newrobustcmd*\mdf@advancelength@freevspace@add[1]{%
863   \advance\dimen@ by \csname mdf@#1@length\endcsname\relax%
864 }
```

```
\mdf@reset
```

Reset changes

```
865 \protected@edef\mdf@reset{\boxmaxdepth\the\boxmaxdepth
866   \splittopskip\the\splittopskip}%
```

```
\mdf@put@frame@standalone
```

Output of `mdframed` inside a non breakable environment.

```
867 \newrobustcmd*\mdf@put@frame@standalone{\relax%
868   \ifvoid\mdf@splitbox@one\relax
869     \mdf@PackageWarning{The environment is empty\MessageBreak}%
870     \let\mdf@reserved@a\relax%
871   \else
872     %Hier berechnung Box-Inhalt+Rahmen oben und unten
873     \setlength{\mdf@verticalmarginwhole@length}%
874       {\dimexpr\ht\mdf@splitbox@one+\dp\mdf@splitbox@one\relax}%
875     \mdf@dolist{\mdf@advancelength@verticalmarginwhole}{%
876       outerlinewidth,middlelinewidth,innerlinewidth,innertopmargin,
877       innerbottommargin,innerlinewidth,middlelinewidth,outerlinewidth}%
878     \mdf@keep@lines@single%
879     \def\mdf@reserved@a{\mdf@put@frame@standalone}%
880   \fi
881   \mdf@reserved@a%
882 }
```

```
\mdf@put@frame
```

Output of `mdframed` inside a breakable environment. The comparison are onyl check whether the contents must be split or not.

```
883 \def\mdf@put@frame{\relax%
884 \ifvoid\mdf@splitbox@one\relax
885 \mdf@PackageWarning{The environment is empty\MessageBreak}%
886 \let\mdf@reserved@a\relax%
887 \else
888 \setlength\mdf@boundingboxwidth{\wd\mdf@splitbox@one}%
889 \mdf@print@space%
890 \mdf@freepagevspace%gives \mdf@freevspace@length
891 \mdf@PackageInfoSpace{\the\mdf@freevspace@length before the beginning of \MessageBreak
```



```

892             the environment ending on input line \MessageBreak}%
893 \ifdimless{\mdf@freevspace@length}{2\baselineskip}
894     {\mdf@PackageInfo{Not enough space on this page}
895     \vfill\ject%
896     \def\mdf@reserved@a{\mdf@put@frame}%
897     }{%
898     %Hier berechnung Box-Inhalt+Rahmen oben und unten
899     \setlength{\mdf@verticalmarginwhole@length}%
900         {\dimexpr\ht\mdf@splitbox@one+\dp\mdf@splitbox@one\relax}%
901     \mdf@dolist{\mdf@advancelength@verticalmarginwhole}{%
902         outerlinewidth,middlelinewidth,innerlinewidth,innertopmargin,
903         innerbottommargin,innerlinewidth,middlelinewidth,outerlinewidth}%
904     \mdf@keep@lines@single%
905     \ifdimless{\mdf@verticalmarginwhole@length}{\mdf@freevspace@length}%
906         {%passt auf Seite%
907         \begingroup
908         \mdf@set@ref
909         \mdf@put@box@single%
910         \endgroup
911         \let\mdf@reserved@a\relax}%
912     {\def\mdf@reserved@a{\mdf@put@frame@i}}%passt nicht auf Seite
913     }%
914 \fi
915 \mdf@reserved@a%
916 }

```

`\mdf@put@frame@i`

Output of the first splitted box.

```

917 \def\mdf@put@frame@i{%Box muss gesplittet werden -- Ausgabe der ersten Teilbox
918 %Berechnung der Splittgroesse -- Linien und Abstand oben
919 %\vbox to 0pt{%
920 %\rlap{\smash{\the\mdf@freevspace@length}}%\hrule \@height\z@ \@width\hsize
921 \mdf@freepagevspace@gives \mdf@freevspace@length
922 %Berechnung ob nur oberen Linien nur auf die Seite passe
923 \dimen@=\the\mdf@freevspace@length%
924 \dimen@i=\mdf@innertopmargin@length%
925 \advance\dimen@i by \mdf@innerlinewidth@length%
926 \advance\dimen@i by \mdf@middlelinewidth@length%
927 \advance\dimen@i by \mdf@outerlinewidth@length%
928 \advance\dimen@i by 2\baselineskip%
929 \ifdimless{\dimen@}{\dimen@i}%
930     {\hrule \@height\z@ \@width\hsize%
931     \vfill\ject%
932     \def\mdf@reserved@a{\mdf@put@frame}%
933     }{%
934     \mdf@freepagevspace%
935     \dimen@=\the\mdf@freevspace@length%
936     \mdf@dolist{\mdf@advancelength@freevspace@sub}{%calculate with \dimen@
937         outerlinewidth,middlelinewidth,innerlinewidth,%
938         innertopmargin,splitbottomskip}%
939     \ifbool{mdf@everyline}{%
940         \ifbool{mdf@bottomline}{%
941             \advance\dimen@ by -\mdf@innerlinewidth@length%

```

```

942         \advance\dimen@ by -\mdf@middlelinewidth@length%
943         \advance\dimen@ by -\mdf@outerlinewidth@length%
944     }{}%
945 }{}%
946 \ifbool{mdf@topline}{}{%
947     \advance\dimen@ by \mdf@innerlinewidth@length%
948     \advance\dimen@ by \mdf@middlelinewidth@length%
949     \advance\dimen@ by \mdf@outerlinewidth@length%
950 }%
951 \advance\dimen@.8\pageshrink
952 \ifdimless{\ht\mdf@splitbox@one+\dp\mdf@splitbox@one}{\dimen@}%
953     {\mdf@PackageWarning{You got a bad break\MessageBreak
954         you have to change it manually\MessageBreak
955         by changing the text, the space\MessageBreak
956         or something else}%
957     \advance\dimen@ by -1.8\baselineskip\relax%
958 }{}%
959 %
960 \splitmaxdepth\z@ \splittopskip\mdf@splittopskip@length%
961 \mdf@ignorevbadness%
962 \setbox\mdf@splitbox@two\vsplit\mdf@splitbox@one to \dimen@
963 \setbox\mdf@splitbox@two\vbox{\unvbox\mdf@splitbox@two}%
964 \setbox\mdf@splitbox@one\vbox{\unvbox\mdf@splitbox@one}%
965 \ifbool{mdf@repeatframetitle}{%
966     \setbox\mdf@splitbox@one\vbox{%
967         \vbox to \mdf@splittopskip@length{\hsize\z@}
968         %\par\unskip\nointerlineskip
969         \unvcopy\mdf@frametitlebox%
970         \mdf@@frametitlerule%
971         \vbox to\dimexpr
972             -\mdf@splittopskip@length+\ht\strutbox+\dp\strutbox
973             +\mdf@innertopmargin@length\relax{\hsize\z@}%
974         \unvbox\mdf@splitbox@one}%
975 }{}%
976 \ifdimgreater{\ht\mdf@splitbox@two+\dp\mdf@splitbox@two}{\dimen@}%
977     {%Falsch gesplittet
978     \mdf@PackageInfo{Box was splittet wrong\MessageBreak}%
979     \dimen@i=\dimen@
980     \advance\dimen@ by -\ht\mdf@splitbox@two
981     \advance\dimen@ by -\dp\mdf@splitbox@two
982     \advance\dimen@i by 0.5\dimen@
983     \splittopskip\z@%
984     \setbox\mdf@splitbox@one\vbox{\unvbox\mdf@splitbox@two%
985         %benoetigt um Tiefe zu haben
986         \hrule \@height\dp\strutbox \@width\z@
987         \unvbox\mdf@splitbox@one}
988     \splittopskip\mdf@splittopskip@length%
989     \mdf@ignorevbadness%
990     \setbox\mdf@splitbox@two\vsplit\mdf@splitbox@one to \dimen@i
991     \setbox\mdf@splitbox@two\vbox{\unvbox\mdf@splitbox@two}%
992     \setbox\mdf@splitbox@one\vbox{\unvbox\mdf@splitbox@one}%
993     \ifdimgreater{\ht\mdf@splitbox@two+\dp\mdf@splitbox@two}{\dimen@}%
994         {%
995             \splittopskip\z@\mdf@ignorevbadness%%
996             \setbox\mdf@splitbox@one\vbox{\unvbox\mdf@splitbox@two%
997                 %benoetigt um Tiefe zu haben

```

```

998                                     \hrule \@height\dp\strutbox \@width\z@
999                                     \unvbox\mdf@splitbox@one}%
1000                                 \mdf@ignorevbadness%
1001                                 \setbox\mdf@splitbox@one\vbox{\unvbox\mdf@splitbox@one}%
1002                                 }{}%
1003 \ifbool{mdf@repeatframetitle}{%
1004     \setbox\mdf@splitbox@one\vbox{%
1005         \vbox to \mdf@splittopskip@length{\hsize\z@}
1006         %\par\unskip\nointerlineskip
1007         \unvcopy\mdf@frametitlebox%
1008         \mdf@@frametitlerule%
1009         \vbox to\dimexpr
1010             -\mdf@splittopskip@length+\ht\strutbox+\dp\strutbox
1011             +\mdf@innertopmargin@length\relax{\hsize\z@}%
1012         \unvbox\mdf@splitbox@one}%
1013     }{}%
1014 }{}%
1015 \ifvoid\mdf@splitbox@one
1016     \mdf@PackageWarning{You got a bad break\MessageBreak
1017         because the splittet box is empty\MessageBreak
1018         You have to change the page settings\MessageBreak
1019         like enlargethispage or something else}%
1020     \setbox\mdf@splitbox@one\vbox{\unvbox\mdf@splitbox@two}%
1021     \setbox\mdf@splitbox@one\vbox{\unvbox\mdf@splitbox@one}%
1022     \enlargethispage{\baselineskip}%
1023     \def\mdf@reserved@a{\mdf@put@frame}%
1024 \fi
1025 \ifvoid\mdf@splitbox@two%%pruefe, ob erste Box leer ist
1026     {\hrule \@height\@size pt \@width\z@%
1027     \hrule \@height\z@ \@width\hsize}%
1028 %     \vfill\@eject%
1029 %     \vskip\baselineskip
1030 %     {\hrule \@height\z@ \@width\hsize}
1031 %
1032     \def\mdf@reserved@a{\mdf@put@frame}%
1033 \else
1034     \ifdimequal{\ht\mdf@splitbox@two}{0pt}%
1035         {\hrule \@height\z@ \@width\hsize%
1036         \vfill\@eject%
1037         \setbox\mdf@splitbox@one\vbox{\unvbox\mdf@splitbox@two\unvbox\mdf@splitbox@one}
1038         \def\mdf@reserved@a{\mdf@put@frame}%
1039         }%
1040         {%
1041         \begingroup%
1042             \mdf@@setzref
1043             \mdf@putbox@first%%Groesse des Splittens passt
1044         \endgroup%
1045         \hrule \@height\z@ \@width\hsize%
1046         \vfill\@eject%
1047         \def\mdf@reserved@a{\mdf@put@frame@ii}%
1048         }%
1049     \fi%
1050 }%
1051 \mdf@reserved@a%
1052 }

```

\mdf@put@frame@ii

Output of the middle and last box.

```

1053 \def\mdf@put@frame@ii{%Ausgabe der mittleren Box(en) wenn vorhanden
1054 \setlength{\mdf@freevspace@length}{\vsize}%
1055 \setlength{\mdf@dimen@}{\dimexpr\ht\mdf@splitbox@one+\dp\mdf@splitbox@one\relax}%
1056 \mdf@dolist{\mdf@advance@length@freevspace@add}{%used \mdf@dimen@
1057         outerlinewidth,middlelinewidth,innerlinewidth,%
1058         innerbottommargin}%%Addition der Linien unten
1059 \ifbool{mdf@everyline}{%
1060     \ifbool{mdf@topline}{%
1061         \advance\mdf@dimen@ by \mdf@innerlinewidth@length%
1062         \advance\mdf@dimen@ by \mdf@middlelinewidth@length%
1063         \advance\mdf@dimen@ by \mdf@outerlinewidth@length%
1064     }{}%
1065 }{}%
1066 \ifbool{mdf@bottomline}{%
1067     \advance\mdf@dimen@ by -\mdf@innerlinewidth@length%
1068     \advance\mdf@dimen@ by -\mdf@middlelinewidth@length%
1069     \advance\mdf@dimen@ by -\mdf@outerlinewidth@length%
1070     \relax}%
1071 \ifdimgreater{\mdf@dimen@}{\mdf@freevspace@length}%
1072 {%
1073     \advance\mdf@freevspace@length by -\mdf@splitbottomskip@length\relax%
1074     \advance\mdf@freevspace@length by .5\ht\strutbox\relax%
1075     \ifbool{mdf@everyline}{%
1076         \ifbool{mdf@topline}{%
1077             \advance\mdf@freevspace@length by -\mdf@innerlinewidth@length%
1078             \advance\mdf@freevspace@length by -\mdf@middlelinewidth@length%
1079             \advance\mdf@freevspace@length by -\mdf@outerlinewidth@length%
1080         }{}%
1081         \ifbool{mdf@bottomline}{%
1082             \advance\mdf@freevspace@length by -\mdf@innerlinewidth@length%
1083             \advance\mdf@freevspace@length by -\mdf@middlelinewidth@length%
1084             \advance\mdf@freevspace@length by -\mdf@outerlinewidth@length%
1085         }\relax}}{}%
1086     }{}%
1087     \splittopmaxdepth\z@ \splittopskip\mdf@splittopskip@length%
1088     \mdf@ignorevbadness%
1089     \setbox\mdf@splitbox@two\vsplit\mdf@splitbox@one to \mdf@freevspace@length%
1090     \setbox\mdf@splitbox@two\vbox{\unvbox\mdf@splitbox@two}%PRUEFEN!!!
1091     \setbox\mdf@splitbox@one\vbox{\unvbox\mdf@splitbox@one}%PRUEFEN!!!!
1092     \ifbool{mdf@repeatframetitle}{%
1093         \setbox\mdf@splitbox@one\vbox{%
1094             \vbox to \mdf@splittopskip@length{\hspace\z@}
1095             %\par\unskip\nointerlineskip
1096             \unvcopy\mdf@frametitlebox%
1097             \mdf@@frametitulerule%
1098             \vbox to\dimexpr
1099                 -\mdf@splittopskip@length+\ht\strutbox+\dp\strutbox
1100                 +\mdf@innertopmargin@length\relax{\hspace\z@}%
1101             \unvbox\mdf@splitbox@one}%
1102     }{}%
1103     \ifvoid\mdf@splitbox@one\relax%
1104         \mdf@PackageWarning{You got a bad break\MessageBreak
1105             because the split box is empty\MessageBreak

```

```

1106             You have to change the settings}%
1107     \setbox\mdf@splitbox@one{\unvbox\mdf@splitbox@two}%
1108     \def\mdf@reserved@a{\enlargethispage{\baselineskip}\mdf@put@frame@ii}%
1109     \else
1110     \begingroup
1111     \mdf@setzref
1112     \mdf@putbox@middle%
1113     \endgroup
1114     \hrule \@height\z@ \@width\hsize
1115     \vfill\ject
1116     \def\mdf@reserved@a{\mdf@put@frame@ii}%
1117     \fi
1118 }%Hier die Ausgabe der mittleren Box
1119 {\ifvoid\mdf@splitbox@one
1120     \mdf@PackageWarning{You got a bad break\MessageBreak
1121         because the last split box is empty\MessageBreak
1122         You have to change the settings}%%
1123     \setbox\mdf@splitbox@one\vbox{\unvbox\mdf@splitbox@one\hrule \@height\z@ \@width\mdfbounding
1124     \fi%
1125     \ifdimless{\ht\mdf@splitbox@one}{1sp}{%
1126         \mdf@PackageWarning{You got a bad break\MessageBreak
1127             because the last split box is empty\MessageBreak
1128             You have to change the settings}%
1129         %\hb@xt@\z@{\box\mdf@splitbox@one}%
1130         \let\mdf@reserved@a\relax%
1131         \setbox\mdf@splitbox@one\vbox{\unvbox\mdf@splitbox@one\hrule \@height\z@ \@width\mdfboundin
1132     }{}%
1133     \begingroup%
1134     \mdf@setzref
1135     \mdf@putbox@second%
1136     \hrule \@height\z@ \@width\hsize%
1137     \endgroup%
1138     \let\mdf@reserved@a\relax%
1139 }%Hier kommt die Ausgabe der letzten Box
1140 \mdf@reserved@a%
1141 }
1142

```

```

\mdf@test@lrb
\mdf@test@ltr
\mdf@test@ltb
\mdf@test@trb
\mdf@test@lrb
\mdf@test@lb
\mdf@test@rb
\mdf@test@tr
\mdf@test@lt
\mdf@test@lr
\mdf@test@tb
\mdf@test@l
\mdf@test@r
\mdf@test@t
\mdf@test@b
\mdf@test@noline

```

Short forms of checking the option which lines should be drawn.

```

1143 %%%      -----t-----
1144 %%%      |                 |
1145 %%%      |                 |
1146 %%%      |                 |
1147 %%%      l|                 |r
1148 %%%      |                 |
1149 %%%      |                 |
1150 %%%      |-----|
1151 %%%      b
1152 %%Zusammenhaenge abfragen:
1153 \newrobustcmd*\mdf@test@ltr{%
1154   \ifboolexpr{ (bool {mdf@topline}) and (bool {mdf@bottomline})
1155               and (bool {mdf@leftline}) and (bool {mdf@rightline})}}
1156 %3-set
1157 \newrobustcmd*\mdf@test@ltr{%
1158   \ifboolexpr{ (bool {mdf@topline}) and not (bool {mdf@bottomline})
1159               and (bool {mdf@leftline}) and (bool {mdf@rightline})}}
1160 \newrobustcmd*\mdf@test@ltb{%
1161   \ifboolexpr{ (bool {mdf@topline}) and (bool {mdf@bottomline})
1162               and (bool {mdf@leftline}) and not (bool {mdf@rightline})}}
1163 \newrobustcmd*\mdf@test@trb{%
1164   \ifboolexpr{ (bool {mdf@topline}) and (bool {mdf@bottomline})
1165               and not (bool {mdf@leftline}) and (bool {mdf@rightline})}}
1166 \newrobustcmd*\mdf@test@lrb{%
1167   \ifboolexpr{ not (bool {mdf@topline}) and (bool {mdf@bottomline})
1168               and (bool {mdf@leftline}) and (bool {mdf@rightline})}}
1169 %2-set
1170 \newrobustcmd*\mdf@test@lb{%
1171   \ifboolexpr{ not (bool {mdf@topline}) and (bool {mdf@bottomline})
1172               and (bool {mdf@leftline}) and not (bool {mdf@rightline})}}
1173 \newrobustcmd*\mdf@test@rb{%
1174   \ifboolexpr{ not (bool {mdf@topline}) and (bool {mdf@bottomline})
1175               and not (bool {mdf@leftline}) and (bool {mdf@rightline})}}
1176 \newrobustcmd*\mdf@test@tr{%
1177   \ifboolexpr{ (bool {mdf@topline}) and not (bool {mdf@bottomline})
1178               and not (bool {mdf@leftline}) and (bool {mdf@rightline})}}
1179 \newrobustcmd*\mdf@test@lt{%
1180   \ifboolexpr{ (bool {mdf@topline}) and not (bool {mdf@bottomline})
1181               and (bool {mdf@leftline}) and not (bool {mdf@rightline})}}
1182 \newrobustcmd*\mdf@test@lr{%
1183   \ifboolexpr{not (bool {mdf@topline}) and not (bool {mdf@bottomline})
1184               and (bool {mdf@leftline}) and (bool {mdf@rightline})}}
1185 \newrobustcmd*\mdf@test@tb{%
1186   \ifboolexpr{ (bool {mdf@topline}) and (bool {mdf@bottomline})
1187               and not (bool {mdf@leftline}) and not (bool {mdf@rightline})}}
1188 %Einzellinien
1189 \newrobustcmd*\mdf@test@l{%
1190   \ifboolexpr{ not (bool {mdf@topline}) and not (bool {mdf@bottomline})
1191               and (bool {mdf@leftline}) and not (bool {mdf@rightline})}}
1192 \newrobustcmd*\mdf@test@r{%
1193   \ifboolexpr{ not (bool {mdf@topline}) and not (bool {mdf@bottomline})
1194               and not (bool {mdf@leftline}) and (bool {mdf@rightline})}}
1195 \newrobustcmd*\mdf@test@t{%
1196   \ifboolexpr{ (bool {mdf@topline}) and not (bool {mdf@bottomline})
1197               and not (bool {mdf@leftline}) and not (bool {mdf@rightline})}}
1198 \newrobustcmd*\mdf@test@b{%

```

```

1199 \ifbool{expr{ not (bool {mdf@topline}) and (bool {mdf@bottomline})
1200           and not (bool {mdf@leftline}) and not (bool {mdf@rightline}})}
1201 %keine Linien
1202 \newrobustcmd*{\mdf@test@noline}%
1203 \ifbool{expr{ not (bool {mdf@topline}) and not (bool {mdf@bottomline})
1204           and not (bool {mdf@leftline}) and not (bool {mdf@rightline}})}
1205 \newrobustcmd*{\mdf@test@single}%
1206 \ifbool{expr{ not (test {\mdf@test@lrb} or test {\mdf@test@ltr} or
1207           test {\mdf@test@ltb} or test {\mdf@test@trb} or
1208           test {\mdf@test@lrb} or test {\mdf@test@lb} or
1209           test {\mdf@test@rb} or test {\mdf@test@tr} or
1210           test {\mdf@test@lt} ) }}
1211 %
1212 \DisableKeyvalOption[action=warning,package=mdframed]{mdf}{framemethod}%
1213 \DisableKeyvalOption[action=warning,package=mdframed]{mdf}{xcolor}%
1214
1215 \endinput

```

B.2. The Explanation of md-frame-0.mdf

```

1216 %% Style file for mdframed for package option 'framemethod=default'
1217 %%
1218 %% This package may be distributed under the terms of the LaTeX Project
1219 %% Public License, as described in lppl.txt in the base LaTeX distribution.
1220 %% Either version 1.0 or, at your option, any later version.
1221 %%
1222 %%
1223 %%$Id: mdframed.dtx 375 2012-04-08 10:52:22Z marco $
1224 %

```

```

\mdframed0packagename
\mdf@frame0date@svn

```

local settings

```

1225 \def\mdframed0packagename{md-frame-0}
1226 \def\mdf@frame0date@svn#1: #2 #3 #4-#5-#6 #7 #8${#4/#5/#6\space }
1227 \ProvidesFile{md-frame-0.mdf}%
1228 [\mdf@frame0date@svn$Id: mdframed.dtx 375 2012-04-08 10:52:22Z marco $]
1229 \mdfversion: \mdframed0packagename]

```

```

\mdf@background@default
\mdf@linecolor@default
\mdf@linecolor@bottom

```

short command

```

1230 \def\mdf@background@default{\color{\mdf@backgroundcolor}}
1231 \def\mdf@frametitlebackground@default{\color{\mdf@frametitlebackgroundcolor}}
1232 \def\mdf@shadow@default{\color{\mdf@shadowcolor}}
1233 \def\mdf@innerlinecolor@default{\color{\mdf@innerlinecolor}}
1234 \def\mdf@middlelinecolor@default{\color{\mdf@middlelinecolor}}
1235 \def\mdf@outerlinecolor@default{\color{\mdf@outerlinecolor}}
1236 \def\mdf@frametitlerulecolor@default{\color{\mdf@frametitlerulecolor}}
1237 \let\mdf@linecolor@default\mdf@middlelinecolor@default
1238 \def\mdf@frametitlerule{%

```

```

1239 \ifbool{mdf@frametitlerule}{%
1240   \vbox to \mdf@frametitlewidth@length {\hsize\mdfframetitleboxwidth%
1241     \par\unskip\vskip\mdf@frametitlebelowskip@length%
1242     \rlap{\noindent\hspace*{-\mdf@innerleftmargin@length}%
1243       \mdf@frametitlecolor@default%
1244       \rule{\dimexpr\mdfframetitleboxwidth%
1245         +\mdf@innerleftmargin@length
1246         +\mdf@innerrightmargin@length\relax
1247         }{\mdf@frametitlewidth@length}%
1248     }}%
1249   }{}
1250 \par\unskip\vskip\mdf@innertopmargin@length%
1251 }%
1252

```

```

\mdf@putbox@single
\mdf@frame@background@single
\mdf@frame@topandbottomline@single
\mdf@frame@leftline@single
\mdf@frame@rightline@single
\mdf@frame@rightline@single

```

The frame of a non splitted contents of mdframed

```

1253 \def\mdf@frame@background@single{%
1254   \ifbool{mdf@shadow}{%
1255     \rlap{\smash{\mdf@shadow@default%
1256       \rule[\dimexpr-\mdfboundingboxdepth
1257         -\mdf@shadowsize@length
1258         \ifbool{mdf@bottomline}{-\mdf@middlelinewidth@length}{}\relax}%
1259         {\dimexpr\mdfboundingboxtotalwidth
1260         +\mdf@shadowsize@length
1261         \ifbool{mdf@rightline}{+\mdf@middlelinewidth@length}{}\relax}%
1262         {\dimexpr\mdfboundingboxtotalheight
1263         +\mdf@shadowsize@length
1264         \ifbool{mdf@bottomline}{+\mdf@middlelinewidth@length}{}\relax}%
1265     }}%
1266   }{}%
1267   \rlap{\mdf@background@default%
1268     \rule[-\mdfboundingboxdepth]%
1269     {\mdfboundingboxtotalwidth}%
1270     {\mdfboundingboxtotalheight}%
1271   }%
1272 }%
1273 \def\mdf@frame@frametitlebackground@single{%
1274   \rlap{\mdf@frametitlebackground@default%
1275     \rule[\dimexpr-\mdfboundingboxdepth+\mdfboundingboxtotalheight-\mdfframetitleboxtotalheight\relax]%
1276     {\mdfboundingboxtotalwidth}%
1277     {\mdfframetitleboxtotalheight}%
1278   }%
1279 }%
1280
1281 \def\mdf@frame@topline@single{%
1282   \rlap{\mdf@linecolor@default%
1283     \ifbool{mdf@topline}{%
1284       \rule[\dimexpr\mdfboundingboxheight-\mdfboundingboxdepth%
1285         +\mdf@innerbottommargin@length+\mdf@innertopmargin@length\relax]%

```



```

1286         {\mdfboundingboxtotalwidth}%
1287         {\mdf@middlelinewidth@length}}%
1288     }%
1289 }%
1290 }%
1291 \def\mdf@frame@bottomline@single{%
1292   \rlap{\ifbool{mdf@leftline}{\hspace*{-\mdf@middlelinewidth@length}}{\mdf@linecolor@default%
1293     \ifbool{mdf@bottomline}{%
1294       \rule[\dimexpr-\mdfboundingboxdepth-\mdf@middlelinewidth@length\relax]%
1295         {\dimexpr\mdfboundingboxtotalwidth
1296           \ifbool{mdf@rightline}{+\mdf@middlelinewidth@length}}}%
1297         \ifbool{mdf@leftline}{+\mdf@middlelinewidth@length}}{\relax}%
1298         {\mdf@middlelinewidth@length}}}%
1299     }%
1300 }%
1301 }%
1302 \def\mdf@frame@leftline@single{%
1303   \llap{\mdf@linecolor@default%
1304     \rule[-\mdfboundingboxdepth]%
1305       {\mdf@middlelinewidth@length}%
1306       {\dimexpr\mdfboundingboxtotalheight%
1307         \ifbool{mdf@topline}{+\mdf@middlelinewidth@length}}{\relax}%
1308     }%
1309 }%
1310 \def\mdf@frame@rightline@single{%
1311   \rlap{\mdf@linecolor@default%
1312     \hspace*{\mdfboundingboxwidth}%
1313     \hspace*{\mdf@innerrightmargin@length}%
1314     \rule[\dimexpr-\mdfboundingboxdepth%
1315       \relax]%
1316       {\mdf@middlelinewidth@length}%
1317       {\dimexpr\mdfboundingboxtotalheight%
1318         +\ifbool{mdf@topline}{\mdf@middlelinewidth@length}{0pt}\relax}%
1319     }%
1320 }%
1321 \def\mdf@putbox@single{%%%% Ausgabe der ungesplitteten Gesamtbox
1322   \ifvoid\mdf@splitbox@one
1323   \else%
1324     \mdf@makebox@out{%
1325       \mdf@makeboxalign@left%
1326       \setlength{\mdfboundingboxwidth}%
1327         {\wd\mdf@splitbox@one}%
1328       \setlength{\mdfboundingboxtotalwidth}%
1329         {\dimexpr\mdfboundingboxwidth+\mdf@innerleftmargin@length%
1330           +\mdf@innerrightmargin@length\relax}%
1331       \setlength{\mdfboundingboxheight}%
1332         {\dimexpr\ht\mdf@splitbox@one+\dp\mdf@splitbox@one\relax}%
1333       \setlength{\mdfboundingboxdepth}%
1334         {\dimexpr\dp\mdf@splitbox@one+\mdf@innerbottommargin@length\relax}%
1335       \setlength{\mdfboundingboxtotalheight}%
1336         {\dimexpr\mdfboundingboxheight+\mdf@innertopmargin@length%
1337           +\mdf@innerbottommargin@length\relax}%
1338       \setlength{\mdftotallinewidth}{%
1339         \dimexpr\mdf@innerlinewidth@length+\mdf@middlelinewidth@length%
1340         +\mdf@outerlinewidth@length}%
1341       \noindent%

```

```

1342     \setlength{\@tempdima}{\dimexpr\mdfboundingboxtotalwidth%
1343             +\ifbool{mdf@leftline}%
1344             {\mdf@middlelinewidth@length}\z@}%
1345             +\ifbool{mdf@rightline}%
1346             {\mdf@middlelinewidth@length}\z@}\relax}%
1347     \mdf@makebox@in[\@tempdima]{%
1348     \null%
1349     \ifbool{mdf@leftline}{%
1350     \hspace*{\mdftotalllinewidth}%
1351     \mdf@frame@leftline@single%
1352     }{}%
1353     \mdf@frame@topline@single%
1354     \mdf@frame@background@single%
1355     \mdf@frame@bottomline@single%
1356     \ifdefempty{\mdf@frametitle}{\mdf@frame@frametitlebackground@single}%
1357     \hspace*{\mdf@innerleftmargin@length}%
1358     \ifbool{mdf@rightline}{%
1359     \mdf@frame@rightline@single%
1360     }{}%
1361     {\box\mdf@splitbox@one}%
1362     }%
1363     \mdf@makeboxalign@right%
1364     }%
1365     \fi%
1366 }

```

```

\mdf@putbox@first
\mdf@frame@background@first
\mdf@frame@leftline@first
\mdf@frame@topline@first
\mdf@frame@rightline@first

```

The first frame of of a splitted contents of mdframed

```

1367 \def\mdf@frame@background@first{%
1368     \ifbool{mdf@shadow}{%
1369     \rlap{\smash{\mdf@shadow@default%
1370     \rule[\dimexpr-\mdfboundingboxdepth
1371     -\mdf@shadowsize@length\relax}%
1372     {\dimexpr\mdfboundingboxtotalwidth
1373     +\mdf@shadowsize@length
1374     \ifbool{mdf@rightline}{+\mdf@middlelinewidth@length}}\relax}%
1375     {\dimexpr\mdfboundingboxtotalheight
1376     +\mdf@shadowsize@length\relax}%
1377     }%
1378     }}{}%
1379     \rlap{\mdf@background@default%
1380     \rule[-\mdfboundingboxdepth]%
1381     {\mdfboundingboxtotalwidth}%
1382     {\mdfboundingboxtotalheight}%
1383     }%
1384     }%
1385 \def\mdf@frame@frametitlebackground@first{%
1386     \ifdimless{\mdfframetitleboxtotalheight}{\mdfboundingboxtotalheight}%
1387     {%
1388     \rlap{\mdf@frametitlebackground@default%

```

```

1389     \rule[\dimexpr-\mdfboundingboxdepth+\mdfboundingboxtotalheight-\mdfframetitleboxtotalheight\relax]
1390         {\mdfboundingboxtotalwidth}%
1391         {\mdfframetitleboxtotalheight}%
1392     }%
1393     \global\mdfframetitleboxtotalheight=-\p@\relax%
1394 }{\mdf@PackageWarning{You got a page break inside the frame title\MessageBreak
1395     Current this isn't well supported}%
1396     \rlap{\mdf@frametitlebackground@default%
1397         \rule[-\mdfboundingboxdepth]%
1398             {\mdfboundingboxtotalwidth}%
1399             {\mdfboundingboxtotalheight}%
1400         }%
1401     \global\mdfframetitleboxtotalheight=\dimexpr\mdfframetitleboxtotalheight
1402         -\mdfboundingboxheight
1403         +\mdf@frametitlebelowskip@length
1404         +.5\baselineskip-1pt
1405     %
1406         +\dp\strutbox
1407     \relax%
1408 }%
1409 \def\mdf@frame@leftline@first{%
1410     \llap{\mdf@linecolor@default%
1411         \rule[-\mdfboundingboxdepth]%
1412             {\mdf@middlelinewidth@length}%
1413             {\dimexpr\mdfboundingboxtotalheight%
1414                 +\ifbool{mdf@topline}{\mdf@middlelinewidth@length}{0pt}\relax}%
1415         }%
1416 }%
1417 \def\mdf@frame@topline@first{%
1418     \rlap{\mdf@linecolor@default%
1419         \rule[\dimexpr\mdfboundingboxheight-\mdfboundingboxdepth+
1420             \mdf@splitbottomskip@length+\mdf@innertopmargin@length\relax]%
1421             {\mdfboundingboxtotalwidth}%
1422             {\mdf@middlelinewidth@length}%
1423         }%
1424 }
1425 \def\mdf@frame@rightline@first{%
1426     \rlap{\mdf@linecolor@default\hspace*{\mdfboundingboxwidth}%
1427         \hspace*{\mdf@innerrightmargin@length}%
1428         \rule[-\mdfboundingboxdepth]%
1429             {\mdf@middlelinewidth@length}%
1430             {\dimexpr\mdfboundingboxtotalheight%
1431                 +\ifbool{mdf@topline}{\mdf@middlelinewidth@length}{0pt}\relax}%
1432         }%
1433 }%
1434 \def\mdf@frame@bottomline@first{%
1435     \rlap{\ifbool{mdf@leftline}{\hspace*{-\mdf@middlelinewidth@length}}{\mdf@linecolor@default%
1436         \ifbool{mdf@bottomline}{%
1437             \rule[\dimexpr-\mdfboundingboxdepth-\mdf@middlelinewidth@length\relax]%
1438                 {\dimexpr\mdfboundingboxtotalwidth
1439                     \ifbool{mdf@rightline}{+\mdf@middlelinewidth@length}{}%
1440                     \ifbool{mdf@leftline}{+\mdf@middlelinewidth@length}{}\relax}%
1441                 {\mdf@middlelinewidth@length}}%
1442         }{}%
1443     }%
1444 }%

```

```

1445 \def\mdf@putbox@first{%%%% Ausgabe der Teilbox 1
1446 \ifvoid\mdf@splitbox@two
1447 \else%
1448   \mdf@makebox@out[\linewidth]{%
1449     \mdf@makeboxalign@left%
1450     \setlength{\mdfboundingboxwidth}{\wd\mdf@splitbox@two}%
1451     \setlength{\mdfboundingboxtotalwidth}%
1452       {\dimexpr\mdfboundingboxwidth+\mdf@innerleftmargin@length%
1453         +\mdf@innerrightmargin@length\relax}%
1454     \setlength{\mdfboundingboxheight}{\dimexpr\ht\mdf@splitbox@two+\dp\mdf@splitbox@two\relax}%
1455     \setlength{\mdfboundingboxdepth}%
1456       {\dimexpr\dp\mdf@splitbox@two+\mdf@splitbottomskip@length\relax}%
1457     \setlength{\mdfboundingboxtotalheight}%
1458       {\dimexpr\mdfboundingboxheight+\mdf@innertopmargin@length%
1459         +\mdf@splitbottomskip@length\relax}%
1460     \setlength{\@tempdima}%
1461       {\dimexpr\mdfboundingboxtotalwidth%
1462         +\ifbool{mdf@leftline}{\mdf@middlelinewidth@length}{\z@}%
1463         +\ifbool{mdf@rightline}{\mdf@middlelinewidth@length}{\z@}%
1464         \relax}%
1465     \mdf@makebox@in[\@tempdima]{%
1466       \null%
1467       \ifbool{mdf@leftline}{%
1468         \hspace*{\mdf@middlelinewidth@length}%
1469         \mdf@frame@leftline@first}{}%
1470       \ifbool{mdf@everyline}%
1471         {\mdf@frame@bottomline@first}{}%
1472       \ifbool{mdf@topline}{%
1473         \mdf@frame@topline@first}{}%
1474       \mdf@frame@background@first%
1475       \ifdefempty{\mdf@frametitle}{\mdf@frame@frametitlebackground@first}%
1476       \hspace*{\mdf@innerleftmargin@length}%
1477       \ifbool{mdf@rightline}{%
1478         \mdf@frame@rightline@first}{}%
1479       {\box\mdf@splitbox@two}%
1480     }%
1481     \mdf@makeboxalign@right%
1482   }%
1483 \fi%
1484 }

```

```

\mdf@putbox@second
\mdf@frame@background@second
\mdf@frame@leftline@second
\mdf@frame@bottomline@second
\mdf@frame@rightline@second

```

The last frame of of a splitted contents of mdframed

```

1485 \def\mdf@frame@background@second{%
1486   \ifbool{mdf@shadow}{%
1487     \rlap{\smash{\mdf@shadow@default%
1488       \rule[\dimexpr-\mdfboundingboxdepth
1489         -\mdf@shadowsize@length
1490         \ifbool{mdf@bottomline}{-\mdf@middlelinewidth@length}{\relax}%
1491         {\dimexpr\mdfboundingboxtotalwidth

```

```

1492             +\mdf@shadowsize@length
1493             \ifbool{mdf@rightline}{+\mdf@middlelinewidth@length}{\relax}%
1494     {\dimexpr\mdfboundingboxtotalheight
1495             +\mdf@shadowsize@length\relax}%
1496     }%
1497 }}}%
1498 \rlap{\mdf@background@default%
1499     \rule[-\mdfboundingboxdepth]%
1500         {\mdfboundingboxtotalwidth}%
1501         {\mdfboundingboxtotalheight}}%
1502 }%
1503 }%
1504 \def\mdf@frame@frametitlebackground@second{%
1505 \ifdimless{\mdfframetitleboxtotalheight}{\z@}%
1506 {}%
1507 {\rlap{\mdf@frametitlebackground@default%
1508     \rule[\dimexpr-\mdfboundingboxdepth+\mdfboundingboxtotalheight-\mdfframetitleboxtotalheight\relax]
1509         {\mdfboundingboxtotalwidth}%
1510         {\mdfframetitleboxtotalheight}}%
1511 }%
1512 }%
1513 }%
1514 \def\mdf@frame@leftline@second{%
1515 \llap{\mdf@linecolor@default%
1516     \rule[-\mdfboundingboxdepth]%
1517         {\mdf@middlelinewidth@length}%
1518         {\dimexpr\mdfboundingboxtotalheight}}%
1519 }%
1520 }%
1521 \def\mdf@frame@bottomline@second{%
1522 \rlap{\ifbool{mdf@leftline}{\hspace*{-\mdf@middlelinewidth@length}}{\mdf@linecolor@default%
1523     \rule[\dimexpr-\mdfboundingboxdepth-\mdf@middlelinewidth@length\relax]%
1524         {\dimexpr\mdfboundingboxtotalwidth
1525             \ifbool{mdf@rightline}{+\mdf@middlelinewidth@length}{\relax}%
1526             \ifbool{mdf@leftline}{+\mdf@middlelinewidth@length}{\relax}}%
1527         {\mdf@middlelinewidth@length}}%
1528 }%
1529 }%
1530 \def\mdf@frame@rightline@second{%
1531 \rlap{\mdf@linecolor@default\hspace*{\mdfboundingboxwidth}%
1532     \hspace*{\mdf@innerrightmargin@length}%
1533     \rule[-\mdfboundingboxdepth]%
1534         {\mdf@middlelinewidth@length}%
1535         {\mdfboundingboxtotalheight}}%
1536 }%
1537 }%
1538 \def\mdf@frame@topline@second{%
1539 \rlap{\ifbool{mdf@leftline}{\hspace*{-\mdf@middlelinewidth@length}}{\mdf@linecolor@default%
1540     \ifbool{mdf@topline}{%
1541         \rule[\dimexpr\mdfboundingboxheight-\mdfboundingboxdepth%
1542             +\mdf@innerbottommargin@length\relax]%
1543             {\dimexpr\mdfboundingboxtotalwidth
1544                 \ifbool{mdf@rightline}{+\mdf@middlelinewidth@length}{\relax}%
1545                 \ifbool{mdf@leftline}{+\mdf@middlelinewidth@length}{\relax}}%
1546         }%
1547         {\mdf@middlelinewidth@length}}%

```

```

1548     {}%
1549   }%
1550 }%
1551
1552 \def\mdf@putbox@second{%
1553   \ifvoid\mdf@splitbox@one%
1554   \else
1555     \mdf@makebox@out{%
1556       \mdf@makeboxalign@left%
1557       \setlength{\mdfboundingboxwidth}{\wd\mdf@splitbox@one}%
1558       \setlength{\mdfboundingboxtotalwidth}%
1559         {\dimexpr\mdfboundingboxwidth+\mdf@innerleftmargin@length%
1560          +\mdf@innerrightmargin@length\relax}%
1561       \setlength{\mdfboundingboxheight}{\dimexpr\ht\mdf@splitbox@one+\dp\mdf@splitbox@one\relax}%
1562       \setlength{\mdfboundingboxdepth}%
1563         {\dimexpr\dp\mdf@splitbox@one+\mdf@innerbottommargin@length\relax}%
1564       \setlength{\mdfboundingboxtotalheight}%
1565         {\dimexpr\mdfboundingboxheight+\mdf@innerbottommargin@length\relax}%
1566       \setlength{\@tempdima}{\dimexpr\mdfboundingboxtotalwidth%
1567         +\ifbool{mdf@leftline}{\mdf@middlelinewidth@length}{\z@}%
1568         +\ifbool{mdf@rightline}{\mdf@middlelinewidth@length}{\z@}%
1569         \relax}%
1570       \mdf@makebox@in[\@tempdima]{%
1571         \null%
1572         \ifbool{mdf@leftline}{%
1573           \hspace*{\mdf@middlelinewidth@length}%
1574           \mdf@frame@leftline@second}{}%
1575         \ifbool{mdf@everyline}%
1576           {\mdf@frame@topline@second}{}%
1577         \mdf@frame@background@second%
1578         \ifbool{mdf@bottomline}{%
1579           \mdf@frame@bottomline@second}{}%
1580         \ifdefempty{\mdf@frametitle}{\mdf@frame@frametitlebackground@second}%
1581         \hspace*{\mdf@innerleftmargin@length}%
1582         \ifbool{mdf@rightline}{%
1583           \mdf@frame@rightline@second}{}%
1584         {\box\mdf@splitbox@one}%
1585       }%
1586     \mdf@makeboxalign@right%
1587   }%
1588 \fi%
1589 }%

```

```

\mdf@putbox@middle
\mdf@frame@background@middle
\mdf@frame@leftline@middle
\mdf@frame@rightline@middle

```

The last frame of of a splitted contents of mdframed

```

1590 \def\mdf@frame@leftline@middle{%
1591   \llap{\mdf@linecolor@default%
1592     \rule[-\mdfboundingboxdepth]%
1593       {\mdf@middlelinewidth@length}%
1594       {\mdfboundingboxtotalheight}%
1595   }%

```

```

1596 }%
1597 \def\mdf@frame@background@middle{%
1598   \ifbool{mdf@shadow}{%
1599     \rlap{\smash{\mdf@shadow@default%
1600       \rule[\dimexpr-\mdfboundingboxdepth
1601         -\mdf@shadowsize@length\relax]%
1602         {\dimexpr\mdfboundingboxtotalwidth
1603           +\mdf@shadowsize@length
1604             \ifbool{mdf@rightline}{+\mdf@middlelinewidth@length}}\relax}%
1605         {\dimexpr\mdfboundingboxtotalheight\relax}%
1606       }%
1607     }}{%
1608     \rlap{\mdf@background@default%
1609       \rule[-\mdfboundingboxdepth]%
1610         {\mdfboundingboxtotalwidth}%
1611         {\mdfboundingboxtotalheight}%
1612       }%
1613     }%
1614 \def\mdf@frame@frametitlebackground@middle{%
1615   \ifdimless{\mdfframetitleboxtotalheight}{\z@}%
1616   {%
1617     \rlap{\mdf@frametitlebackground@default%
1618       \rule[\dimexpr-\mdfboundingboxdepth+\mdfboundingboxtotalheight-\mdfframetitleboxtotalheight\relax]
1619         {\mdfboundingboxtotalwidth}%
1620         {\mdfframetitleboxtotalheight}%
1621       }%
1622     \global\mdfframetitleboxtotalheight=-\p@ \relax%
1623   }%
1624 }%
1625 \def\mdf@frame@rightline@middle{%
1626   \rlap{\mdf@linecolor@default\hspace*{\mdfboundingboxwidth}%
1627     \hspace*{\mdf@innerrightmargin@length}%
1628     \rule[-\mdfboundingboxdepth]%
1629       {\mdf@middlelinewidth@length}%
1630       {\mdfboundingboxtotalheight}%
1631     }%
1632 }%
1633 \def\mdf@frame@topline@middle{%
1634   \rlap{\ifbool{mdf@leftline}{\hspace*{-\mdf@middlelinewidth@length}}{\mdf@linecolor@default%
1635     \ifbool{mdf@topline}{%
1636       \rule[\dimexpr\mdfboundingboxtotalheight-\mdfboundingboxdepth\relax]%
1637         {\dimexpr\mdfboundingboxtotalwidth
1638           \ifbool{mdf@rightline}{+\mdf@middlelinewidth@length}}}%
1639         \ifbool{mdf@leftline}{+\mdf@middlelinewidth@length}}\relax
1640       }%
1641       {\mdf@middlelinewidth@length}}%
1642     }%
1643   }%
1644 }%
1645 \def\mdf@frame@bottomline@middle{%
1646   \rlap{\ifbool{mdf@leftline}{\hspace*{-\mdf@middlelinewidth@length}}{\mdf@linecolor@default%
1647     \ifbool{mdf@bottomline}{%
1648       \rule[\dimexpr-\mdfboundingboxdepth-\mdf@middlelinewidth@length\relax]%
1649         {\dimexpr\mdfboundingboxtotalwidth
1650           \ifbool{mdf@rightline}{+\mdf@middlelinewidth@length}}}%
1651         \ifbool{mdf@leftline}{+\mdf@middlelinewidth@length}}\relax}%

```

```

1652         {\mdf@middlelinewidth@length}}%
1653     }%
1654 }%
1655 }%
1656
1657 \def\mdf@putbox@middle{%
1658 \ifvoid\mdf@splitbox@two%
1659 \else
1660 \mdf@makebox@out{%
1661 \mdf@makeboxalign@left%
1662 \setlength{\mdfboundingboxwidth}{\wd\mdf@splitbox@two}%
1663 \setlength{\mdfboundingboxtotalwidth}%
1664     {\dimexpr\mdfboundingboxwidth+\mdf@innerleftmargin@length%
1665     +\mdf@innerrightmargin@length\relax}%
1666 \setlength{\mdfboundingboxheight}{\dimexpr\ht\mdf@splitbox@two+\dp\mdf@splitbox@two\relax}%
1667 \setlength{\mdfboundingboxdepth}%
1668     {\dimexpr\dp\mdf@splitbox@two+\mdf@splitbottomskip@length\relax}%
1669 \setlength{\mdfboundingboxtotalheight}%
1670     {\dimexpr\mdfboundingboxheight+\mdf@splitbottomskip@length\relax}%
1671 \setlength{\@tempdima}{\dimexpr\mdfboundingboxtotalwidth%
1672     +\ifbool{mdf@leftline}{\mdf@middlelinewidth@length}{\z@}%
1673     +\ifbool{mdf@rightline}{\mdf@middlelinewidth@length}{\z@}%
1674     \relax}%
1675 \mdf@makebox@in[\@tempdima]{%
1676 \null%
1677 \ifbool{mdf@leftline}{%
1678 \hspace*{\mdf@middlelinewidth@length}%
1679 \mdf@frame@leftline@middle}{}%
1680 \mdf@frame@background@middle%
1681 \ifbool{mdf@everyline}%
1682     {\mdf@frame@topline@middle}{}%
1683 \ifdefempty{\mdf@frametitle}{\mdf@frame@frametitlebackground@middle}%
1684 \ifbool{mdf@everyline}%
1685     {\mdf@frame@bottomline@middle}{}%
1686 \hspace*{\mdf@innerleftmargin@length}%
1687 \ifbool{mdf@rightline}{%
1688 \mdf@frame@rightline@middle}{}%
1689 {\box\mdf@splitbox@two}%
1690 }%
1691 \mdf@makeboxalign@right%
1692 }
1693 \fi%
1694 }
1695 \endinput

```

B.3. The Explanation of md-frame-1.mdf

```

1696 %% Style file for mdframed for package option 'framemethod=default'
1697 %%
1698 %% This package may be distributed under the terms of the LaTeX Project
1699 %% Public License, as described in lppl.txt in the base LaTeX distribution.
1700 %% Either version 1.0 or, at your option, any later version.
1701 %%
1702 %%
1703 %%$Id: mdframed.dtx 375 2012-04-08 10:52:22Z marco $

```


1704 %

```
\mdframedIpackagename
\mdf@frameIdate@svn
```

local settings

```
1705 \def\mdframedIpackagename{md-frame-1}
1706 \def\mdf@frameIdate@svn$#1: #2 #3 #4-#5-#6 #7 #8${#4/#5/#6\space }
1707 \ProvidesFile{md-frame-1.mdf}%
1708 [\mdf@frameIdate@svn$Id: mdframed.dtx 375 2012-04-08 10:52:22Z marco $ %
1709 \mdversion: \mdframedIpackagename]
1710 %
```

```
\mdf@tikz@settings
```

Define settings for tikz

```
1711 %Allgemeine Einstellungen fuer tikz
1712 \def\mdf@tikz@settings{%
1713 %
1714 \tikzset{mdfbox/.style={anchor=south west,%
1715 inner sep=0pt,%
1716 outer sep=0pt,%
1717 \mdf@fontcolor,}}% anchor der Ausgabebox ist unten links
1718 \tikzset{mdfcorners/.style={rounded corners=\mdf@roundcorner@length}}%
1719 \tikzset{mdfbackground/.style={fill=\mdf@backgroundcolor,%
1720 draw=\mdf@backgroundcolor}}%
1721 \tikzset{mdfframetitlebackground/.style={fill=\mdf@frametitlebackgroundcolor,%
1722 draw=none,%
1723 rounded corners={max(\mdf@roundcorner@length%
1724 -\mdf@innerlinewidth@length%
1725 -.5\mdf@middlelinewidth@length,0)}}}%
1726 %
1727 \tikzset{mdfouterline/.style={}}%
1728 % nur wenn outerlinewidth>0 wird aussere Linie gezeichnet
1729 \ifdimgreater{\mdf@outerlinewidth@length}{\z@}
1730 {\tikzset{mdfouterline/.append style={%
1731 draw=\mdf@outerlinecolor,%
1732 line width=2\mdf@outerlinewidth@length+\mdf@middlelinewidth@length}}}%
1733 %
1734 \tikzset{mdfinnerline/.style={}}%
1735 % nur wenn innerlinewidth>0 wird innere Linie gezeichnet
1736 \ifdimgreater{\mdf@innerlinewidth@length}{\z@}
1737 {\tikzset{mdfinnerline/.append style={%
1738 draw=\mdf@innerlinecolor,%
1739 line width=2\mdf@innerlinewidth@length+\mdf@middlelinewidth@length}}}%
1740 %
1741 \tikzset{mdfshadow/.style={drop shadow={%
1742 shadow xshift=\mdf@shadowsize@length-2pt,
1743 shadow yshift=-\mdf@shadowsize@length+2pt,
1744 fill=\mdf@shadowcolor,
1745 every shadow }}}%
1746 %
1747 \mdf@tikzset@local
1748 \tikzset{mdfmiddleline/.style={}}%
1749 % nur wenn middlelinewidth>0 wird mittlere Linie gezeichnet
1750 \ifdimgreater{\mdf@middlelinewidth@length}{\z@}
```

```

1751   {\tikzset{mdfmiddleline/.append style={%
1752     preaction={draw=\mdf@middlelinecolor,%
1753       line width=\mdf@middlelinewidth@length},%
1754     line width=\mdf@middlelinewidth@length,%
1755     tikzsetting}}}%
1756   }{}%
1757 }%

```

```

\mdf@tikzbox@tfl
\mdf@tikzbox@otl

```

Befehle fuer Ausgabe von Rahmen und Hintergrund

```

1758 \newrobustcmd*\mdf@tikzbox@tfl[1]{%three or four borders
1759   \clip(0,0)rectangle(\mdf@boundingboxwidth,\mdf@boundingboxheight);%
1760   \begin{scope}[mdfcorners]%
1761     \clip[preaction=mdfouterline]%
1762       [postaction=mdfbackground]%
1763       [postaction=mdfinnerline]#1;%
1764   \end{scope}%
1765   \path[mdfmiddleline,mdfcorners]#1;
1766 }%
1767
1768
1769
1770 \newrobustcmd*\mdf@tikzbox@otl[2]{%one or two borders
1771   \clip(0,0)rectangle(\mdf@boundingboxwidth,\mdf@boundingboxheight);%
1772   \begin{scope}
1773     \path[mdfouterline,mdfcorners]#1;%
1774     \clip[postaction=mdfbackground]#2;%
1775     \path[mdfinnerline,mdfcorners]#1;%
1776   \end{scope}%
1777   \path[mdfmiddleline,mdfcorners]#1;}%

```

```

\mdf@put@frametitlerule

```

frametitlerule with tikz

```

1778 \tikzset{mdfframetitlerule/.style={%
1779   draw=none,
1780   fill=\mdf@frametitlerulecolor,
1781 }%
1782 }
1783 \def\mdf@@@frametitlerule{%
1784   \ifbool{mdf@frametitlerule}{%
1785     \vbox{\hsize0pt
1786       \par\unskip\vskip\mdf@frametitlebelowskip@length
1787       \noindent\rlap{\hspace*{-\mdf@innerleftmargin@length}%
1788       \begingroup%
1789       \pgfmathsetlength{\dimen@}{\mdfframetitleboxwidth+\mdf@innerleftmargin@length+\mdf@innerrightmargin@length}
1790       \tikz\draw[mdfframetitlerule] (0,0)%
1791         rectangle (\dimen@,\mdf@frametitlerulewidth@length);
1792       \endgroup}
1793     }%
1794   }{}
1795   \par\unskip\vskip\mdf@innertopmargin@length%
1796 }%

```

1797

\mdf@putbox@single

Output of the non breakable contents.

```

1798 % Info zu den verwendeten Punkten:
1799 % O ist die untere linke Ecke der Mitte der middleline
1800 % P ist die obere rechte Ecke der Mitte der middleline
1801 % A ist der Punkt fuer den anchor (d.h. die untere linke Ecke) der Ausgabebox
1802 %
1803 \def\mdf@putbox@single{%
1804   \ifvoid\mdf@splitbox@one
1805   \else%
1806     \mdf@makebox@out{%
1807       \mdf@makeboxalign@left%
1808       \mdf@tikz@settings%
1809 %
1810       \setlength\mdfboundingboxwidth{\wd\mdf@splitbox@one}%
1811       \advance\mdfboundingboxwidth by \mdf@innerleftmargin@length\relax%
1812       \advance\mdfboundingboxwidth by \mdf@innerrightmargin@length\relax%
1813       \ifbool{mdf@leftline}{%
1814         \advance\mdfboundingboxwidth by \mdf@innerlinewidth@length\relax%
1815         \advance\mdfboundingboxwidth by \mdf@middlelinewidth@length\relax%
1816         \advance\mdfboundingboxwidth by \mdf@outerlinewidth@length\relax}}{%
1817       \ifbool{mdf@rightline}{%
1818         \advance\mdfboundingboxwidth by \mdf@innerlinewidth@length\relax%
1819         \advance\mdfboundingboxwidth by \mdf@middlelinewidth@length\relax%
1820         \advance\mdfboundingboxwidth by \mdf@outerlinewidth@length\relax}}}%
1821 %
1822       \setlength\mdfboundingboxheight{\dimexpr\ht\mdf@splitbox@one+\dp\mdf@splitbox@one\relax}%
1823       \advance\mdfboundingboxheight by \mdf@innertopmargin@length\relax%
1824       \advance\mdfboundingboxheight by \mdf@innerbottommargin@length\relax%
1825       \ifbool{mdf@topline}{%
1826         \advance\mdfboundingboxheight by \mdf@innerlinewidth@length\relax%
1827         \advance\mdfboundingboxheight by \mdf@middlelinewidth@length\relax%
1828         \advance\mdfboundingboxheight by \mdf@outerlinewidth@length\relax}}{%
1829       \ifbool{mdf@bottomline}{%
1830         \advance\mdfboundingboxheight by \mdf@innerlinewidth@length\relax%
1831         \advance\mdfboundingboxheight by \mdf@middlelinewidth@length\relax%
1832         \advance\mdfboundingboxheight by \mdf@outerlinewidth@length\relax}}}%
1833       \mdf@makebox@in[\mdfboundingboxwidth]{%
1834       \null%
1835       \begin{tikzpicture}[remember picture]%
1836         \pgfmathsetlengthmacro\mdf@Ax{+\mdf@innerleftmargin@length}%
1837         \pgfmathsetlengthmacro\mdf@Ay{+\mdf@innerbottommargin@length}%
1838         \pgfmathsetlengthmacro\mdf@Ox{+0pt}%
1839         \pgfmathsetlengthmacro\mdf@Oy{+0pt}%
1840         \pgfmathsetlengthmacro\mdf@Px{+\mdfboundingboxwidth}%
1841         \pgfmathsetlengthmacro\mdf@Py{+\mdfboundingboxheight}%
1842         \ifbool{mdf@leftline}%
1843           {%
1844           \pgfmathsetlengthmacro\mdf@Ax%
1845             {\mdf@Ax+\mdf@outerlinewidth@length+%
1846             \mdf@middlelinewidth@length+\mdf@innerlinewidth@length}%
1847           \pgfmathsetlengthmacro\mdf@Ox%

```

```

1848         {\mdf@0x+\mdf@outerlinewidth@length+0.5\mdf@middlelinewidth@length}%
1849     }{}%
1850 \ifbool{mdf@rightline}%
1851     {%
1852     \pgfmathsetlengthmacro\mdf@Px%
1853         {\mdf@Px-\mdf@outerlinewidth@length-0.5\mdf@middlelinewidth@length}%
1854     }{}%
1855 \ifbool{mdf@bottomline}%
1856     {%
1857     \pgfmathsetlengthmacro\mdf@Ay%
1858         {\mdf@Ay+\mdf@outerlinewidth@length+\mdf@middlelinewidth@length%
1859         +\mdf@innerlinewidth@length}%
1860     \pgfmathsetlengthmacro\mdf@0y%
1861         {\mdf@0y+\mdf@outerlinewidth@length+0.5\mdf@middlelinewidth@length}%
1862     }{}%
1863 \ifbool{mdf@topline}%
1864     {%
1865     \pgfmathsetlengthmacro\mdf@Py%
1866         {\mdf@Py-\mdf@outerlinewidth@length-0.5\mdf@middlelinewidth@length}%
1867     }{}%
1868 %
1869 \coordinate(0)at(\mdf@0x,\mdf@0y);%
1870 \coordinate(P)at(\mdf@Px,\mdf@Py);%
1871 %
1872 \ifbool{mdf@shadow}
1873     {\path[mdfshadow,mdfcorners](0) rectangle (P);}{}%
1874 %
1875 \begin{scope}[use as bounding box]
1876 \mdf@test@ltrb{\mdf@tikzbox@tfl{(0)--(0|-P)--(P)--(P|-0)--cycle)}}{}%
1877 %
1878 \mdf@test@ltb{\mdf@tikzbox@tfl{(P|-0)--(0)--(0|-P)--(P)}}{}%
1879 \mdf@test@trb{\mdf@tikzbox@tfl{(0|-P)--(P)--(P|-0)--(0)}}{}%
1880 \mdf@test@ltr{\mdf@tikzbox@tfl{(0)--(0|-P)--(P)--(P|-0)}}{}%
1881 \mdf@test@lrb{\mdf@tikzbox@tfl{(P|-0)--(0)--(0|-P)--(P)}}{}%
1882 %
1883 \mdf@test@lb{\mdf@tikzbox@otl{(P|-0)--(0)--(0|-P)}}%
1884         {(P)--(P|-0)[mdfcorners]--(0)--(0|-P)}%
1885     }{}%
1886 \mdf@test@rb{\mdf@tikzbox@otl{(P)--(P|-0)--(0)}}%
1887         {(0|-P)--(P)[mdfcorners]--(P|-0)--(0)}%
1888     }{}%
1889 \mdf@test@tr{\mdf@tikzbox@otl{(0|-P)--(P)--(P|-0)}}%
1890         {(0)--(0|-P)[mdfcorners]--(P)--(P|-0)}%
1891     }{}%
1892 \mdf@test@lt{\mdf@tikzbox@otl{(0)--(0|-P)--(P)}}%
1893         {(P|-0)--(0)[mdfcorners]--(0|-P)--(P)}%
1894     }{}%
1895 \mdf@test@lr{\mdf@tikzbox@otl{(0)--(0|-P)(P)--(P|-0)}}%
1896         {(0)rectangle(P)}%
1897     }{}%
1898 \mdf@test@tb{\mdf@tikzbox@otl{(0)--(0|-P)(0|-P)--(P)}}%
1899         {(0)rectangle(P)}%
1900     }{}%
1901 %
1902 \mdf@test@l{\mdf@tikzbox@otl{(0)--(0|-P)}}%
1903         {(0)rectangle(P)}%

```

```

1904         }{}%
1905     \mdf@test@r{\mdf@tikzbox@otl{(0|P)--(P)}%
1906                 {(0)rectangle(P)}%
1907         }{}%
1908     \mdf@test@t{\mdf@tikzbox@otl{(0|-P)--(P)}%
1909                 {(0)rectangle(P)}%
1910         }{}%
1911     \mdf@test@b{\mdf@tikzbox@otl{(0)--(0|P)}%
1912                 {(0)rectangle(P)}%
1913         }{}%
1914 %
1915     \mdf@test@noline{\path[mdfbackground,mdfcorners](0)rectangle(P);}{}%
1916 %
1917     %Frametitlebackground
1918     \drawbrackgroundframetitle@single
1919 %
1920     \node[mdfbox]at(\mdf@Ax,\mdf@Ay){\box\mdf@splitbox@one};% Ausgabebox einfuegen
1921 \end{scope}
1922 %HIER KOMMT EIN WEITERES MAKRO
1923 \mdf@singleextra
1924 \mdfcreateextratikz
1925 \end{tikzpicture}%
1926 }%
1927 \mdf@makeboxalign@right%
1928 }%
1929 \fi
1930 }%
1931 \def\drawbrackgroundframetitle@single{%
1932 \ifdefempty{\mdf@frametitle}{}{}%
1933 \drawbrackgroundframetitle@@single%
1934 }%
1935 }%
1936 \def\drawbrackgroundframetitle@@single{%
1937 \begin{scope}%background frame title
1938 \ifbool{mdf@leftline}{
1939 \pgfmathsetlengthmacro\mdf@0x%
1940 {\mdf@0x+\mdf@innerlinewidth@length+0.5\mdf@middlelinewidth@length}
1941 }{}%
1942 \ifbool{mdf@rightline}{%
1943 \pgfmathsetlengthmacro\mdf@Px%
1944 {\mdf@Px-\mdf@innerlinewidth@length-0.5\mdf@middlelinewidth@length}
1945 }{}%
1946 \ifbool{mdf@topline}{%
1947 \pgfmathsetlengthmacro\mdf@Py%
1948 {\mdf@Py-\mdf@innerlinewidth@length-0.5\mdf@middlelinewidth@length}
1949 }{}%
1950 \pgfmathsetlengthmacro\mdf@Fy
1951 {\mdf@Py-\mdfframetitleboxtotalheight}
1952 \path[mdfframetitlebackground]
1953 (\mdf@0x,\mdf@Fy) -- (\mdf@0x,\mdf@Py)%
1954 --(\mdf@Px,\mdf@Py) --(\mdf@Px,\mdf@Fy);
1955 \end{scope}
1956 }

```

\mdf@putbox@first

Output of the first breakable contents.

```

1957 \def\drawbrackgroundframetitle@first{%
1958 \ifdefempty{\mdf@frametitle}}{%
1959 \ifdimgreater{\mdfboundingboxheight}{\mdfframetitleboxtotalheight}%
1960 {%
1961 \drawbrackgroundframetitle@@first
1962 \pgfmathsetlength{\global\mdfframetitleboxtotalheight}{-\p@}%
1963 }\mdf@PackageWarning{You got a page break inside the frame title\MessageBreak
1964 Currently this isn't well supported}%
1965 \drawbrackgroundframetitle@@first
1966 \pgfmathsetlength{\global\mdfframetitleboxtotalheight}%
1967 {\mdfframetitleboxtotalheight-\mdfboundingboxheight-
1968 \mdf@innerlinewidth@length-0.5\mdf@middlelinewidth@length%
1969 +\mdf@frametitlebelowskip@length+\mdf@splitbottomskip@length+\mdf@splittopskip@length}
1970 +\dp\strutbox%
1971 }%
1972 }%
1973 }%
1974 }%
1975 %
1976 \def\drawbrackgroundframetitle@@first{%
1977 \begin{scope}%background frame title
1978 \ifbool{mdf@leftline}{%
1979 \pgfmathsetlengthmacro\mdf@0x%
1980 {\mdf@0x+\mdf@innerlinewidth@length+0.5\mdf@middlelinewidth@length}
1981 }{%
1982 \ifbool{mdf@rightline}{%
1983 \pgfmathsetlengthmacro\mdf@Px%
1984 {\mdf@Px-\mdf@innerlinewidth@length-0.5\mdf@middlelinewidth@length}
1985 }{%
1986 \ifbool{mdf@topline}{%
1987 \pgfmathsetlengthmacro\mdf@Py%
1988 {\mdf@Py-\mdf@innerlinewidth@length-0.5\mdf@middlelinewidth@length}
1989 }{%
1990 \pgfmathsetlengthmacro\mdf@Fy
1991 {\max(0,\mdf@Py-\mdfframetitleboxtotalheight)}
1992 \path[mdfframetitlebackground]
1993 (\mdf@0x,\mdf@Fy) -- (\mdf@0x,\mdf@Py)%
1994 -- (\mdf@Px,\mdf@Py) -- (\mdf@Px,\mdf@Fy);
1995 \end{scope}%
1996 }%
1997 %
1998 \def\mdf@putbox@first{%
1999 \ifvoid\mdf@splitbox@two
2000 \else%
2001 \mdf@makebox@out{%
2002 \mdf@makeboxalign@left%
2003 \mdf@tikz@settings%
2004 \setlength\mdfboundingboxwidth{\wd\mdf@splitbox@two}%
2005 \advance\mdfboundingboxwidth by \mdf@innerleftmargin@length\relax%
2006 \advance\mdfboundingboxwidth by \mdf@innerrightmargin@length\relax%
2007 \ifbool{mdf@leftline}{%
2008 \advance\mdfboundingboxwidth by \mdf@innerlinewidth@length\relax%
2009 \advance\mdfboundingboxwidth by \mdf@middlelinewidth@length\relax%
2010 \advance\mdfboundingboxwidth by \mdf@outerlinewidth@length\relax}}{%
2011 \ifbool{mdf@rightline}{%

```

```

2012     \advance\mdfboundingboxwidth by \mdf@innerlinewidth@length\relax%
2013     \advance\mdfboundingboxwidth by \mdf@middlelinewidth@length\relax%
2014     \advance\mdfboundingboxwidth by \mdf@outerlinewidth@length\relax}}}%
2015     \setlength\mdfboundingboxheight{\dimexpr\ht\mdf@splitbox@two+\dp\mdf@splitbox@two\relax}%
2016     \advance\mdfboundingboxheight by \mdf@innertopmargin@length\relax%
2017     \advance\mdfboundingboxheight by \mdf@splitbottomskip@length\relax%
2018     \ifbool{mdf@topline}{%
2019         \advance\mdfboundingboxheight by \mdf@innerlinewidth@length\relax%
2020         \advance\mdfboundingboxheight by \mdf@middlelinewidth@length\relax%
2021         \advance\mdfboundingboxheight by \mdf@outerlinewidth@length\relax}}}%
2022 %%%
2023     \ifbool{mdf@everyline}{%
2024         \ifbool{mdf@bottomline}{%
2025             \advance\mdfboundingboxheight by \mdf@innerlinewidth@length\relax%
2026             \advance\mdfboundingboxheight by \mdf@middlelinewidth@length\relax%
2027             \advance\mdfboundingboxheight by \mdf@outerlinewidth@length\relax}}}%
2028     }}}%
2029 %%%
2030     %\ifdimequal{\pagegoal}{\maxdimen}{\enlargethispage{\baselineskip}}}% ???
2031     \ifdimgreater{\pagegoal-\maxdimen}{0pt}{\enlargethispage{\baselineskip}}}%
2032     \mdf@makebox@in[\mdfboundingboxwidth]{%
2033     \null%
2034     \begin{tikzpicture}[remember picture]
2035         \pgfmathsetlengthmacro\mdf@Ax{+\mdf@innerleftmargin@length}%
2036         \pgfmathsetlengthmacro\mdf@Ay{+\mdf@splitbottomskip@length}%
2037         \pgfmathsetlengthmacro\mdf@0x{+0pt}%
2038         \pgfmathsetlengthmacro\mdf@0y{+0pt}%
2039         \pgfmathsetlengthmacro\mdf@Px{+\mdfboundingboxwidth}%
2040         \pgfmathsetlengthmacro\mdf@Py{+\mdfboundingboxheight}%
2041         \ifbool{mdf@leftline}
2042             {%
2043             \pgfmathsetlengthmacro\mdf@Ax%
2044                 {\mdf@Ax+\mdf@outerlinewidth@length+%
2045                 \mdf@middlelinewidth@length+\mdf@innerlinewidth@length}%
2046             \pgfmathsetlengthmacro\mdf@0x%
2047                 {\mdf@0x+\mdf@outerlinewidth@length+0.5\mdf@middlelinewidth@length}%
2048             }}}%
2049         \ifbool{mdf@rightline}{%
2050             \pgfmathsetlengthmacro\mdf@Px%
2051                 {\mdf@Px-\mdf@outerlinewidth@length-0.5\mdf@middlelinewidth@length}%
2052             }}}%
2053         \ifbool{mdf@topline}{%
2054             \pgfmathsetlengthmacro\mdf@Py%
2055                 {\mdf@Py-\mdf@outerlinewidth@length-0.5\mdf@middlelinewidth@length}%
2056             }}}%
2057 %
2058     \ifbool{mdf@everyline}{%
2059         \ifbool{mdf@bottomline}{%
2060             {%
2061             \pgfmathsetlengthmacro\mdf@Ay%
2062                 {\mdf@Ay+\mdf@outerlinewidth@length+\mdf@middlelinewidth@length%
2063                 +\mdf@innerlinewidth@length}%
2064             \pgfmathsetlengthmacro\mdf@0y%
2065                 {\mdf@0y+\mdf@outerlinewidth@length+0.5\mdf@middlelinewidth@length}%
2066             }}}%
2067         \ifbool{mdf@topline}{%

```

```

2068     {%
2069     \pgfmathsetlengthmacro\mdf@Py%
2070     {\mdf@Py-\mdf@outerlinewidth@length-0.5\mdf@middlelinewidth@length}%
2071     }{}%
2072   }{}%
2073 %%
2074   \coordinate(0)at(\mdf@0x,\mdf@0y);%
2075   \coordinate(P)at(\mdf@Px,\mdf@Py);%
2076   \ifbool{mdf@shadow}
2077     {\path[mdfshadow] (0) -- (0|-P) to[mdfcorners] (P) -- (P|-0) -- (0);}{}%
2078   \begin{scope}[use as bounding box]
2079   %%%%%%%%%%%
2080   \ifbool{mdf@everyline}{%
2081     \mdf@test@ltrb{\mdf@tikzbox@tfl{(0)--(0|-P)--(P)--(P|-0)--cycle}}{}%
2082     \mdf@test@ltb{\mdf@tikzbox@tfl{(P|-0)--(0)--(0|-P)--(P)}}{}%
2083     \mdf@test@trb{\mdf@tikzbox@tfl{(0|-P)--(P)--(P|-0)--(0)}}{}%
2084     \mdf@test@ltr{\mdf@tikzbox@tfl{(0)--(0|-P)--(P)--(P|-0)}}{}%
2085     \mdf@test@lrb{\mdf@tikzbox@tfl{(P|-0)--(0)--(0|-P)--(P)}}{}%
2086     \mdf@test@lb{\mdf@tikzbox@otl{(P|-0)--(0)--(0|-P)}}%
2087         {(P)--(P|-0)[mdfcorners]--(0)--(0|-P)}%
2088     }{}%
2089     \mdf@test@rb{\mdf@tikzbox@otl{(P)--(P|-0)--(0)}}%
2090         {(0|-P)--(P)[mdfcorners]--(P|-0)--(0)}%
2091     }{}%
2092     \mdf@test@tr{\mdf@tikzbox@otl{(0|-P)--(P)--(P|-0)}}%
2093         {(0)--(0|-P)[mdfcorners]--(P)--(P|-0)}%
2094     }{}%
2095     \mdf@test@lt{\mdf@tikzbox@otl{(0)--(0|-P)--(P)}}%
2096         {(P|-0)--(0)[mdfcorners]--(0|-P)--(P)}%
2097     }{}%
2098     \mdf@test@lr{\mdf@tikzbox@otl{(0)--(0|-P)(P)--(P|-0)}}%
2099         {(0)rectangle(P)}%
2100     }{}%
2101     \mdf@test@tb{\mdf@tikzbox@otl{(0)--(0|-P)(0|-P)--(P)}}%
2102         {(0)rectangle(P)}%
2103     }{}%
2104     \mdf@test@l{\mdf@tikzbox@otl{(0)--(0|-P)}}%
2105         {(0)rectangle(P)}%
2106     }{}%
2107     \mdf@test@r{\mdf@tikzbox@otl{(0|-P)--(P)}}%
2108         {(0)rectangle(P)}%
2109     }{}%
2110     \mdf@test@t{\mdf@tikzbox@otl{(0|-P)--(P)}}%
2111         {(0)rectangle(P)}%
2112     }{}%
2113     \mdf@test@b{\mdf@tikzbox@otl{(0)--(0|-P)}}%
2114         {(0)rectangle(P)}%
2115     }{}%
2116     \mdf@test@noline{\path[mdfbackground,mdfcorners](0)rectangle(P);}{}%
2117   }{
2118   \ifboolexpr{test {\mdf@test@ltrb} or test {\mdf@test@ltr}}%
2119     {\mdf@tikzbox@tfl{(0)--(0|-P)--(P)--(P|-0)}}%
2120     {}%
2121   \ifboolexpr{test {\mdf@test@ltb} or test {\mdf@test@lt}}%
2122     {\mdf@tikzbox@otl{(0)--(0|-P)--(P)}{(P|-0)--(0)[mdfcorners]--(0|-P)--(P)}}%
2123     {}%

```



```

2124 \ifboolexpr{test {\mdf@test@trb} or test {\mdf@test@tr}}%
2125   {\mdf@tikzbox@otl{(0|-P)--(P)--(P|-0)}{(0)--(0|-P)[mdfcorners]--(P)--(P|-0)}}%
2126   }%
2127 \ifboolexpr{test {\mdf@test@lrb} or test {\mdf@test@lrr}}%
2128   {\mdf@tikzbox@otl{(0)--(0|-P)(P)--(P|-0)}{(0)rectangle(P)}}%
2129   }%
2130 \ifboolexpr{test {\mdf@test@tbb} or test {\mdf@test@ttr}}%
2131   {\mdf@tikzbox@otl{(0|-P)--(P)}{(0)rectangle(P)}}%
2132   }%
2133 \ifboolexpr{test {\mdf@test@lbb} or test {\mdf@test@lrr}}%
2134   {\mdf@tikzbox@otl{(0)--(0|-P)}{(0)rectangle(P)}}%
2135   }%
2136 \ifboolexpr{test {\mdf@test@rbb} or test {\mdf@test@rrr}}%
2137   {\mdf@tikzbox@otl{(0|-P)--(P)}{(0)rectangle(P)}}%
2138   }%
2139 \mdf@test@b{\path[mdfbackground](0)rectangle(P);}%
2140 \mdf@test@noline{\path[mdfbackground,mdfcorners](0)--(0|-P)--(P)--(P|-0);}%
2141 }
2142 %%%%%%%%%%%
2143 \drawbackgroundframetitle@first
2144 \node[mdfbox]at(\mdf@Ax,\mdf@Ay){\box\mdf@splitbox@two};% Ausgabebox einfuegen
2145 \end{scope}
2146 %HIER KOMMT EIN WEITERES MAKRO
2147 \mdf@firstextra
2148 \mdfcreateextratikz%
2149 \end{tikzpicture}%
2150 }%
2151 \mdf@makeboxalign@right%
2152 }%
2153 \fi
2154 }%

```

\mdf@putbox@middle

Output of the middle breakable contents.

```

2155 \def\drawbackgroundframetitle@middle{%
2156 \ifdefempty{\mdf@frametitle}}{%
2157 \ifdimless{\mdfframetitleboxtotalheight}{\z@}
2158 }{%
2159 \drawbackgroundframetitle@@middle%
2160 \pgfmathsetlength{\global\mdfframetitleboxtotalheight}{-\p@}%
2161 }%
2162 }%
2163 }%
2164 %
2165 \def\drawbackgroundframetitle@@middle{%
2166 \begin{scope}%background frame title
2167 \ifbool{mdf@leftline}{
2168 \pgfmathsetlengthmacro\mdf@0x%
2169   {\mdf@0x+\mdf@innerlinewidth@length+0.5\mdf@middlelinewidth@length}
2170 }{%
2171 \ifbool{mdf@rightline}{%
2172 \pgfmathsetlengthmacro\mdf@Px%
2173   {\mdf@Px-\mdf@innerlinewidth@length-0.5\mdf@middlelinewidth@length}
2174 }{%

```

```

2175     \pgfmathsetlengthmacro\mdf@Fy
2176         {\mdf@Py-\mdfframetitleboxtotalheight}
2177     \path[mdfframetitlebackground,rounded corners=\z@]
2178         (\mdf@0x,\mdf@Fy) -- (\mdf@0x,\mdf@Py)%
2179         --(\mdf@Px,\mdf@Py) --(\mdf@Px,\mdf@Fy);
2180     \end{scope}
2181 }%
2182 %
2183 \def\drawbrackgroundframetitle@@middle{%
2184     \begin{scope}%background frame title
2185         \ifbool{mdf@leftline}{
2186             \pgfmathsetlengthmacro\mdf@0x%
2187                 {\mdf@0x+\mdf@innerlinewidth@length+0.5\mdf@middlelinewidth@length}
2188             }{}%
2189         \ifbool{mdf@rightline}{%
2190             \pgfmathsetlengthmacro\mdf@Px%
2191                 {\mdf@Px-\mdf@innerlinewidth@length-0.5\mdf@middlelinewidth@length}
2192             }{}%
2193         \pgfmathsetlengthmacro\mdf@Fy
2194             {\mdf@Py-\mdfframetitleboxtotalheight}
2195         \path[mdfframetitlebackground,rounded corners=\z@]
2196             (\mdf@0x,\mdf@Fy) -- (\mdf@0x,\mdf@Py)%
2197             --(\mdf@Px,\mdf@Py) --(\mdf@Px,\mdf@Fy);
2198         \end{scope}
2199 }%
2200 \def\mdf@putbox@middle{%
2201     \ifvoid\mdf@splitbox@two
2202     \else%
2203         \mdf@makebox@out{%
2204             \mdf@makeboxalign@left%
2205             \mdf@tikz@settings%
2206             \setlength\mdfboundingboxwidth{\wd\mdf@splitbox@two}%
2207             \advance\mdfboundingboxwidth by \mdf@innerleftmargin@length\relax%
2208             \advance\mdfboundingboxwidth by \mdf@innerrightmargin@length\relax%
2209             \ifbool{mdf@leftline}{%
2210                 \advance\mdfboundingboxwidth by \mdf@innerlinewidth@length\relax%
2211                 \advance\mdfboundingboxwidth by \mdf@middlelinewidth@length\relax%
2212                 \advance\mdfboundingboxwidth by \mdf@outerlinewidth@length\relax}{}%
2213             \ifbool{mdf@rightline}{%
2214                 \advance\mdfboundingboxwidth by \mdf@innerlinewidth@length\relax%
2215                 \advance\mdfboundingboxwidth by \mdf@middlelinewidth@length\relax%
2216                 \advance\mdfboundingboxwidth by \mdf@outerlinewidth@length\relax}{}%
2217             \setlength\mdfboundingboxheight{\dimexpr\ht\mdf@splitbox@two+\dp\mdf@splitbox@two\relax}%
2218             \advance\mdfboundingboxheight by \mdf@splitbottomskip@length\relax%
2219             %%%%%%%%%%
2220             \ifbool{mdf@everyline}{%
2221                 \ifbool{mdf@topline}{%
2222                     \advance\mdfboundingboxheight by \mdf@innerlinewidth@length\relax%
2223                     \advance\mdfboundingboxheight by \mdf@middlelinewidth@length\relax%
2224                     \advance\mdfboundingboxheight by \mdf@outerlinewidth@length\relax}{}%
2225                 \ifbool{mdf@bottomline}{%
2226                     \advance\mdfboundingboxheight by \mdf@innerlinewidth@length\relax%
2227                     \advance\mdfboundingboxheight by \mdf@middlelinewidth@length\relax%
2228                     \advance\mdfboundingboxheight by \mdf@outerlinewidth@length\relax}{}%
2229                 }{}%
2230             %%%%%%%%%%

```

```

2231 \mdf@makebox@in[\mdfboundingboxwidth]{%
2232 \null%
2233 \begin{tikzpicture}[remember picture]
2234 \pgfmathsetlengthmacro\mdf@Ax{+\mdf@innerleftmargin@length}%
2235 \pgfmathsetlengthmacro\mdf@Ay{+\mdf@splitbottomskip@length}%
2236 \pgfmathsetlengthmacro\mdf@Ox{+0pt}%
2237 \pgfmathsetlengthmacro\mdf@Oy{+0pt}%
2238 \pgfmathsetlengthmacro\mdf@Px{+\mdfboundingboxwidth}%
2239 \pgfmathsetlengthmacro\mdf@Py{+\mdfboundingboxheight}%
2240 \ifbool{mdf@leftline}%
2241 {%
2242 \pgfmathsetlengthmacro\mdf@Ax%
2243 {\mdf@Ax+\mdf@outerlinewidth@length+
2244 \mdf@middlelinewidth@length+\mdf@innerlinewidth@length}%
2245 \pgfmathsetlengthmacro\mdf@Ox%
2246 {\mdf@Ox+\mdf@outerlinewidth@length+0.5\mdf@middlelinewidth@length}%
2247 }{}%
2248 \ifbool{mdf@rightline}%
2249 {%
2250 \pgfmathsetlengthmacro\mdf@Px%
2251 {\mdf@Px-\mdf@outerlinewidth@length-0.5\mdf@middlelinewidth@length}%
2252 }{}%
2253 %%
2254 \ifbool{mdf@everyline}{%
2255 \ifbool{mdf@bottomline}%
2256 {%
2257 \pgfmathsetlengthmacro\mdf@Ay%
2258 {\mdf@Ay+\mdf@outerlinewidth@length+\mdf@middlelinewidth@length%
2259 +\mdf@innerlinewidth@length}%
2260 \pgfmathsetlengthmacro\mdf@Oy%
2261 {\mdf@Oy+\mdf@outerlinewidth@length+0.5\mdf@middlelinewidth@length}%
2262 }{}%
2263 \ifbool{mdf@topline}%
2264 {%
2265 \pgfmathsetlengthmacro\mdf@Py%
2266 {\mdf@Py-\mdf@outerlinewidth@length-0.5\mdf@middlelinewidth@length}%
2267 }{}%
2268 }{}%
2269 %%
2270 \coordinate(0)at(\mdf@Ox,\mdf@Oy);%
2271 \coordinate(P)at(\mdf@Px,\mdf@Py);%
2272 \ifbool{mdf@shadow}
2273 {\path[mdfshadow](0)rectangle(P);}%
2274 \begin{scope}[use as bounding box]
2275 %%%%%%%%%%%
2276 \ifbool{mdf@everyline}{%
2277 \mdf@test@lrb{\mdf@tikzbox@tfl{(0)--(0|-P)--(P)--(P|-0)--cycle}}{}%
2278 \mdf@test@ltb{\mdf@tikzbox@tfl{(P|-0)--(0)--(0|-P)--(P)}}{}%
2279 \mdf@test@trb{\mdf@tikzbox@tfl{(0|-P)--(P)--(P|-0)--(0)}}{}%
2280 \mdf@test@ltr{\mdf@tikzbox@tfl{(0)--(0|-P)--(P)--(P|-0)}}{}%
2281 \mdf@test@lrb{\mdf@tikzbox@tfl{(P|-0)--(0)--(0|-P)--(P)}}{}%
2282 \mdf@test@lb{\mdf@tikzbox@otl{(P|-0)--(0)--(0|-P)}%
2283 {(P)--(P|-0)[mdfcorners]--(0)--(0|-P)}%
2284 }{}%
2285 \mdf@test@rb{\mdf@tikzbox@otl{(P)--(P|-0)--(0)}%
2286 {(0|-P)--(P)[mdfcorners]--(P|-0)--(0)}%

```

```

2287         }{}%
2288     \mdf@test@tr{\mdf@tikzbox@otl{(0|P)--(P)--(P|0)}%
2289                 {(0)--(0|P)[mdfcorners]--(P)--(P|0)}%
2290         }{}%
2291     \mdf@test@lt{\mdf@tikzbox@otl{(0)--(0|P)--(P)}%
2292                 {(P|0)--(0)[mdfcorners]--(0|P)--(P)}%
2293         }{}%
2294     \mdf@test@lr{\mdf@tikzbox@otl{(0)--(0|P)(P)--(P|0)}%
2295                 {(0)rectangle(P)}%
2296         }{}%
2297     \mdf@test@tb{\mdf@tikzbox@otl{(0)--(0|P)(0|P)--(P)}%
2298                 {(0)rectangle(P)}%
2299         }{}%
2300     \mdf@test@l{\mdf@tikzbox@otl{(0)--(0|P)}%
2301                 {(0)rectangle(P)}%
2302         }{}%
2303     \mdf@test@r{\mdf@tikzbox@otl{(0|P)--(P)}%
2304                 {(0)rectangle(P)}%
2305         }{}%
2306     \mdf@test@t{\mdf@tikzbox@otl{(0|P)--(P)}%
2307                 {(0)rectangle(P)}%
2308         }{}%
2309     \mdf@test@b{\mdf@tikzbox@otl{(0)--(0|P)}%
2310                 {(0)rectangle(P)}%
2311         }{}%
2312     \mdf@test@noline{\path[mdfbackground,mdfcorners](0)rectangle(P);}{}%
2313 }{
2314     \ifboolexpr{bool {mdf@leftline} and bool {mdf@rightline}}%
2315         {\mdf@tikzbox@otl{(0)--(0|P)(P)--(P|0)}{(0)rectangle(P)}}{}%
2316     \ifboolexpr{bool {mdf@leftline} and not (bool {mdf@rightline})}%
2317         {\mdf@tikzbox@otl{(0)--(0|P)}{(0)rectangle(P)}}{}%
2318     \ifboolexpr{not (bool {mdf@leftline}) and bool {mdf@rightline}}%
2319         {\mdf@tikzbox@otl{(P)--(P|0)}{(0)rectangle(P)}}{}%
2320     \ifboolexpr{not (bool {mdf@leftline}) and not (bool {mdf@rightline})}%
2321         {\path[mdfbackground](0)rectangle(P);}{}%
2322     }
2323 %%%
2324     \drawbrackgroundframetitle@middle
2325     \node[mdfbox]at(\mdf@Ax,\mdf@Ay){\box\mdf@splitbox@two};% Ausgabebox einfuegen
2326     \end{scope}
2327     \mdf@middleextra
2328     %HIER KOMMT EIN WEITERES MAKRO
2329     \mdfcreateextratikz
2330     \end{tikzpicture}%
2331     }%
2332     \mdf@makeboxalign@right%
2333     }%
2334 \fi
2335 }%

```

\mdf@putbox@second

Output of the last breakable contents.

```

2336 \def\drawbrackgroundframetitle@second{%
2337 \ifdefempty{\mdf@frametitle}{}{}%

```

```

2338 \ifdimless{\mdfframetitleboxtotalheight}{\z@}
2339 }{}%
2340 \drawbackgroundframetitle@@second%
2341 }%
2342 }%
2343 }%
2344 %
2345 \def\drawbackgroundframetitle@@second{%
2346     \begin{scope}%background frame title
2347     \ifbool{mdf@leftline}{
2348         \pgfmathsetlengthmacro\mdf@0x%
2349             {\mdf@0x+\mdf@innerlinewidth@length+0.5\mdf@middlelinewidth@length}
2350     }{}%
2351     \ifbool{mdf@rightline}{%
2352         \pgfmathsetlengthmacro\mdf@Px%
2353             {\mdf@Px-\mdf@innerlinewidth@length-0.5\mdf@middlelinewidth@length}
2354     }{}%
2355     \pgfmathsetlengthmacro\mdf@Fy
2356         {\mdf@Py-\mdfframetitleboxtotalheight}
2357     \path[mdfframetitlebackground,rounded corners=\z@]
2358         (\mdf@0x,\mdf@Fy) -- (\mdf@0x,\mdf@Py)%
2359         --(\mdf@Px,\mdf@Py) --(\mdf@Px,\mdf@Fy);
2360     \end{scope}
2361 }%
2362 \def\mdf@putbox@second{%
2363     \ifvoid\mdf@splitbox@one
2364     \else%
2365         \mdf@makebox@out{%
2366             \mdf@makeboxalign@left%
2367             \mdf@tikz@settings%
2368             \setlength\mdfboundingboxwidth{\wd\mdf@splitbox@one}%
2369             \advance\mdfboundingboxwidth by \mdf@innerleftmargin@length\relax%
2370             \advance\mdfboundingboxwidth by \mdf@innerrightmargin@length\relax%
2371             \ifbool{mdf@leftline}{%
2372                 \advance\mdfboundingboxwidth by \mdf@innerlinewidth@length\relax%
2373                 \advance\mdfboundingboxwidth by \mdf@middlelinewidth@length\relax%
2374                 \advance\mdfboundingboxwidth by \mdf@outerlinewidth@length\relax}{}%
2375             \ifbool{mdf@rightline}{%
2376                 \advance\mdfboundingboxwidth by \mdf@innerlinewidth@length\relax%
2377                 \advance\mdfboundingboxwidth by \mdf@middlelinewidth@length\relax%
2378                 \advance\mdfboundingboxwidth by \mdf@outerlinewidth@length\relax}{}%
2379             \setlength\mdfboundingboxheight{\dimexpr\ht\mdf@splitbox@one+\dp\mdf@splitbox@one\relax}%
2380             \advance\mdfboundingboxheight by \mdf@innerbottommargin@length\relax%
2381             \ifbool{mdf@bottomline}{%
2382                 \advance\mdfboundingboxheight by \mdf@innerlinewidth@length\relax%
2383                 \advance\mdfboundingboxheight by \mdf@middlelinewidth@length\relax%
2384                 \advance\mdfboundingboxheight by \mdf@outerlinewidth@length\relax}{}%
2385             %%%%%%%%%
2386             \ifbool{mdf@everyline}{%
2387                 \ifbool{mdf@topline}{%
2388                     \advance\mdfboundingboxheight by \mdf@innerlinewidth@length\relax%
2389                     \advance\mdfboundingboxheight by \mdf@middlelinewidth@length\relax%
2390                     \advance\mdfboundingboxheight by \mdf@outerlinewidth@length\relax}{}%
2391                 }{}%
2392             %%%%%%%%%
2393             \mdf@makebox@in[\mdfboundingboxwidth]{%

```

```

2394 \null%
2395 \begin{tikzpicture}[remember picture]
2396 \pgfmathsetlengthmacro\mdf@Ax{+\mdf@innerleftmargin@length}%
2397 \pgfmathsetlengthmacro\mdf@Ay{+\mdf@innerbottommargin@length}%
2398 \pgfmathsetlengthmacro\mdf@Ox{+0pt}%
2399 \pgfmathsetlengthmacro\mdf@Oy{+0pt}%
2400 \pgfmathsetlengthmacro\mdf@Px{+\mdfboundingboxwidth}%
2401 \pgfmathsetlengthmacro\mdf@Py{+\mdfboundingboxheight}%
2402 \ifbool{mdf@leftline}%
2403 {%
2404 \pgfmathsetlengthmacro\mdf@Ax%
2405 {\mdf@Ax+\mdf@outerlinewidth@length+
2406 \mdf@middlelinewidth@length+\mdf@innerlinewidth@length}%
2407 \pgfmathsetlengthmacro\mdf@Ox%
2408 {\mdf@Ox+\mdf@outerlinewidth@length+0.5\mdf@middlelinewidth@length}%
2409 }{}%
2410 \ifbool{mdf@rightline}%
2411 {%
2412 \pgfmathsetlengthmacro\mdf@Px%
2413 {\mdf@Px-\mdf@outerlinewidth@length-0.5\mdf@middlelinewidth@length}%
2414 }{}%
2415 \ifbool{mdf@bottomline}%
2416 {%
2417 \pgfmathsetlengthmacro\mdf@Ay%
2418 {\mdf@Ay+\mdf@outerlinewidth@length+
2419 \mdf@middlelinewidth@length+\mdf@innerlinewidth@length}%
2420 \pgfmathsetlengthmacro\mdf@Oy%
2421 {\mdf@Oy+\mdf@outerlinewidth@length+0.5\mdf@middlelinewidth@length}%
2422 }{}%
2423 %%
2424 \ifbool{mdf@everyline}{%
2425 \ifbool{mdf@topline}%
2426 {%
2427 \pgfmathsetlengthmacro\mdf@Py%
2428 {\mdf@Py-\mdf@outerlinewidth@length-0.5\mdf@middlelinewidth@length}%
2429 }{}%
2430 }{}%
2431 %%
2432 \coordinate(0)at(\mdf@Ox,\mdf@Oy);%
2433 \coordinate(P)at(\mdf@Px,\mdf@Py);%
2434 \ifbool{mdf@shadow}
2435 {\path[mdfshadow] (0|-P) to[mdfcorners] (0) to[mdfcorners] (P|-0) -- (P) -- (0|-P);}{}%
2436 \begin{scope}[use as bounding box]
2437 %%%
2438 \ifbool{mdf@everyline}{%
2439 \mdf@test@ltrb{\mdf@tikzbox@tfl{(0)--(0|-P)--(P)--(P|-0)--cycle}}{}%
2440 \mdf@test@ltb{\mdf@tikzbox@tfl{(P|-0)--(0)--(0|-P)--(P)}}{}%
2441 \mdf@test@trb{\mdf@tikzbox@tfl{(0|-P)--(P)--(P|-0)--(0)}}{}%
2442 \mdf@test@ltr{\mdf@tikzbox@tfl{(0)--(0|-P)--(P)--(P|-0)}}{}%
2443 \mdf@test@lrb{\mdf@tikzbox@tfl{(P|-0)--(0)--(0|-P)--(P)}}{}%
2444 \mdf@test@lb{\mdf@tikzbox@otl{(P|-0)--(0)--(0|-P)}%
2445 {(P)--(P|-0)[mdfcorners]--(0)--(0|-P)}%
2446 }{}%
2447 \mdf@test@rb{\mdf@tikzbox@otl{(P)--(P|-0)--(0)}%
2448 {(0|-P)--(P)[mdfcorners]--(P|-0)--(0)}%
2449 }{}%

```

```

2450 \mdf@test@tr{\mdf@tikzbox@otl{(0|P)--(P)--(P|0)}%
2451         {(0)--(0|P)[mdfcorners]--(P)--(P|0)}%
2452     }{}%
2453 \mdf@test@lt{\mdf@tikzbox@otl{(0)--(0|P)--(P)}%
2454         {(P|0)--(0)[mdfcorners]--(0|P)--(P)}%
2455     }{}%
2456 \mdf@test@lr{\mdf@tikzbox@otl{(0)--(0|P)(P)--(P|0)}%
2457         {(0)rectangle(P)}%
2458     }{}%
2459 \mdf@test@tb{\mdf@tikzbox@otl{(0)--(0|P)(0|P)--(P)}%
2460         {(0)rectangle(P)}%
2461     }{}%
2462 \mdf@test@l{\mdf@tikzbox@otl{(0)--(0|P)}%
2463         {(0)rectangle(P)}%
2464     }{}%
2465 \mdf@test@r{\mdf@tikzbox@otl{(0|P)--(P)}%
2466         {(0)rectangle(P)}%
2467     }{}%
2468 \mdf@test@t{\mdf@tikzbox@otl{(0|P)--(P)}%
2469         {(0)rectangle(P)}%
2470     }{}%
2471 \mdf@test@b{\mdf@tikzbox@otl{(0)--(0|P)}%
2472         {(0)rectangle(P)}%
2473     }{}%
2474 \mdf@test@noline{\path[mdfbackground,mdfcorners](0)rectangle(P);}{}%
2475 }{%
2476 \ifboolexpr{test {\mdf@test@ltrb} or test {\mdf@test@lrb}}%
2477     {\mdf@tikzbox@otl{(P|0)--(0)--(0|P)--(P)}%
2478     }{}%
2479 \ifboolexpr{test {\mdf@test@ltb} or test {\mdf@test@lb}}%
2480     {\mdf@tikzbox@otl{(P|0)--(0)--(0|P)}{(P)--(P|0)[mdfcorners]--(0)--(0|P)}%
2481     }{}%
2482 \ifboolexpr{test {\mdf@test@trb} or test {\mdf@test@rb}}%
2483     {\mdf@tikzbox@otl{(P)--(P|0)--(0)}{(0|P)--(P)[mdfcorners]--(P|0)--(0)}%
2484     }{}%
2485 \ifboolexpr{test {\mdf@test@ltr} or test {\mdf@test@lr}}%
2486     {\mdf@tikzbox@otl{(0)--(0|P)(P)--(P|0)}{(0)rectangle(P)}%
2487     }{}%
2488 \ifboolexpr{test {\mdf@test@tb} or test {\mdf@test@b}}%
2489     {\mdf@tikzbox@otl{(0)--(0|P)}{(0)rectangle(P)}%
2490     }{}%
2491 \ifboolexpr{test {\mdf@test@lt} or test {\mdf@test@l}}%
2492     {\mdf@tikzbox@otl{(0)--(0|P)}{(0)rectangle(P)}%
2493     }{}%
2494 \ifboolexpr{test {\mdf@test@tr} or test {\mdf@test@r}}%
2495     {\mdf@tikzbox@otl{(0|P)--(P)}{(0)rectangle(P)}%
2496     }{}%
2497 \mdf@test@t{\path[mdfbackground,mdfcorners](0|P)--(0)--(0|P)--(P);}{}%
2498 \mdf@test@noline{\path[mdfbackground,mdfcorners](0|P)--(0)--(0|P)--(P);}{}%
2499 }%
2500 \drawbackgroundframetitle@second
2501 \node[mdfbox] at (\mdf@Ax,\mdf@Ay){\box\mdf@splitbox@one};% Ausgabebox einfuegen
2502 \end{scope}
2503 \mdf@secondextra
2504 %HIER KOMMT EIN WEITERES MAKRO
2505 \mdfcreateextratikz

```

```

2506   \end{tikzpicture}%
2507   }%
2508   \mdf@makeboxalign@right%
2509   }%
2510 \fi
2511 }%

```

```
2512 \endinput
```

B.4. The Explanation of md-frame-2.mdf / md-frame-3.mdf

```

2513 %% Style file for mdframed for package option 'framemethod=default'
2514 %%
2515 %% This package may be distributed under the terms of the LaTeX Project
2516 %% Public License, as described in lpl.txt in the base LaTeX distribution.
2517 %% Either version 1.0 or, at your option, any later version.
2518 %%
2519 %%
2520 %%$Id: mdframed.dtx 375 2012-04-08 10:52:22Z marco $
2521 %

```

```

\mdframedIIPackagename
\mdf@frameIIDate@svn

```

local settings

```

2522 \def\mdframedIIPackagename{md-frame-2}
2523 \def\mdf@frameIIDate@svn$#1: #2 #3 #4-#5-#6 #7 #8${#4/#5/#6\space }
2524 \ProvidesFile{md-frame-2.mdf}%
2525     [\mdf@frameIIDate@svn$Id: mdframed.dtx 375 2012-04-08 10:52:22Z marco $ %
2526     \mdversion: \mdframedIIPackagename]

```

```

\mdf@ptlength@to@pscode
\ptTps

```

Command to calculate a latex length to postscript

```

2527 \def\mdf@ptlength@to@pscode#1{\pst@number{#1} \pst@number\psxunit div }
2528 \def\mdf@ptlength@to@pscode@length#1{\pst@number{\csname mdf@#1@length\endcsname} \pst@number\psxunit }
2529 \let\ptTps\mdf@ptlength@to@pscode\relax
2530 \let\ptTpsL\mdf@ptlength@to@pscode@length\relax

```

```

\mdfbackgroundstyle
\mdflinestyle
\mdfframetitlerule
\mdfframetitlebackground

```

background and line settings for pstricks

```

2531 \def\mdf@pstricks@settings{%expand by \addtopstyle
2532   \newsstyle{mdfbackgroundstyle}%
2533   {linecolor=\mdf@backgroundcolor,fillstyle=solid,%
2534     fillcolor=\mdf@backgroundcolor,linestyle=none,%
2535     ,dimen=middle,%
2536   }%
2537 %
2538   \newsstyle{mdfframetitlebackgroundstyle}{%

```



```

2539     linecolor=\mdf@frametitlebackgroundcolor,
2540     fillcolor=\mdf@frametitlebackgroundcolor,
2541     fillstyle=solid,linestyle=none,
2542     linearc=\ifdimgreater{\mdf@roundcorner@length%
2543             -\mdf@innerlinewidth@length%
2544             -.5\mdf@middlelinewidth@length}
2545             {\z@}{\dimexpr\mdf@roundcorner@length%
2546             -\mdf@innerlinewidth@length%
2547             -.5\mdf@middlelinewidth@length}{\z@},
2548   }
2549 %
2550 \newsstyle{mdfouterlinestyle}{linestyle=none}%
2551 \ifdimgreater{\mdf@outerlinewidth@length}{\z@}
2552   {\newsstyle{mdfouterlinestyle}{%
2553     linecolor=\mdf@outerlinecolor,%
2554     linewidth=\dimexpr2\mdf@outerlinewidth@length+\mdf@middlelinewidth@length\relax,
2555     dimen=middle,
2556   }}}%
2557 %
2558 \newsstyle{mdfinnerlinestyle}{linestyle=none}%
2559 \ifdimgreater{\mdf@innerlinewidth@length}{\z@}%
2560   {\newsstyle{mdfinnerlinestyle}{%
2561     linecolor=\mdf@innerlinecolor,%
2562     linewidth=\dimexpr2\mdf@innerlinewidth@length+\mdf@middlelinewidth@length\relax,
2563     dimen=middle,
2564   }}}%
2565 %
2566 \newsstyle{mdfmiddlelinestyle}{linestyle=none}%
2567 \newsstyle{mdfshadow}{shadow=true,shadowcolor=\mdf@shadowcolor,shadowsize=\mdf@shadowsize@length}%
2568 \ifdimgreater{\mdf@middlelinewidth@length}{\z@}%
2569   {\newsstyle{mdfmiddlelinestyle}{%
2570     linewidth=\mdf@middlelinewidth@length,%
2571     linecolor=\mdf@middlelinecolor,dimen=middle
2572   }}}%
2573 \mdfpstricks@appendsettings
2574 }%
2575 %
2576 \newrobustcmd*\mdf@pstricksbox@fl[2]{%four lines
2577   \psframe[style=mdfouterlinestyle](#1)(#2)%ausen=3mm
2578   \psframe[style=mdfbackgroundstyle](#1)(#2)%Hintergrund
2579   \psclip{\psframe[style=mdfmiddlelinestyle](#1)(#2)}
2580   \psframe[style=mdfinnerlinestyle](#1)(#2)%innere=3mm
2581   \endpsclip
2582   \psframe[style=mdfmiddlelinestyle](#1)(#2)%mittlere=2mm
2583 }%
2584 \newrobustcmd*\mdf@pstricksbox@tl[1]{%three lines
2585   \psline[style=mdfouterlinestyle]#1%ausen=3mm
2586   \psline[style=mdfbackgroundstyle]#1%Hintergrund
2587   \psclip{\psline[style=mdfmiddlelinestyle]#1}
2588   \psline[style=mdfinnerlinestyle]#1%innere=3mm
2589   \endpsclip
2590   \psline[style=mdfmiddlelinestyle]#1%mittlere=2mm
2591 }%
2592 \newrobustcmd*\mdf@pstricksbox@tcl[2]{%two combined lines
2593 %%#1 background comple
2594 %%#2 line path

```

```

2595 \psline[style=mdfouterlinestyle]#2%ausсен=3mm
2596 \psline[style=mdfbackgroundstyle]#2%Hintergrund
2597 \psclip{\pscustom[linestyle=none]{
2598     \psline[style=mdfmiddlelinestyle]#2
2599     \psline[linestyle=none,linearc=0pt]#1}
2600 }
2601 \psframe[style=mdfbackgroundstyle,linearc=0pt](mdf@0)(mdf@P)%Hintergrund
2602 \psline[style=mdfinnerlinestyle]#2%innere=3mm
2603 \endpsclip
2604 \psline[style=mdfmiddlelinestyle]#2%mittlere=2mm
2605 }%
2606 \newrobustcmd*\mdf@pstricksbox@tncl[2]{%two not combined lines
2607 \begingroup
2608 \psset{linearc=0pt}
2609 \psline[style=mdfouterlinestyle](mdf@0)#1%ausсен=3mm
2610 \psline[style=mdfouterlinestyle](mdf@P)#2%ausсен=3mm
2611 \psclip{
2612 \pscustom[linestyle=none]{%
2613 \psline[style=mdfmiddlelinestyle](mdf@0)#1%mittlere=2mm
2614 \psline[linestyle=none](mdf@0)#2
2615 \psline[style=mdfmiddlelinestyle](mdf@P)#2%mittlere=2mm
2616 \psline[linestyle=none](mdf@P)#1
2617 }%
2618 }%
2619 \psframe[style=mdfbackgroundstyle,linearc=0pt](mdf@0)(mdf@P)%Hintergrund
2620 \psline[style=mdfinnerlinestyle](mdf@0)#1%innere=3mm
2621 \psline[style=mdfinnerlinestyle](mdf@P)#2%innere=3mm
2622 \endpsclip
2623 \psline[style=mdfmiddlelinestyle](mdf@0)#1%mittlere=2mm
2624 \psline[style=mdfmiddlelinestyle](mdf@P)#2%mittlere=2mm
2625 \endgroup
2626 }%
2627 \newrobustcmd*\mdf@pstricksbox@ol[1]{%one line
2628 \begingroup
2629 \psset{linearc=0pt}
2630 \psline[style=mdfouterlinestyle]#1%ausсен=3mm
2631 \psline[style=mdfbackgroundstyle]#1%Hintergrund
2632 \psclip{\pscustom[linestyle=none]{
2633 \psline[style=mdfmiddlelinestyle]#1
2634 \psframe[linestyle=none,fillstyle=none,dimen=inner](mdf@0)(mdf@P)
2635 }}
2636 \psframe[style=mdfbackgroundstyle](mdf@0)(mdf@P)
2637 \psline[style=mdfinnerlinestyle]#1%innere=3mm
2638 \endpsclip
2639 \psline[style=mdfmiddlelinestyle]#1%mittlere=2mm
2640 \endgroup%
2641 }%
2642
2643 %
2644 \newpsstyle{mdfframetitrerule}{%
2645   linecolor=\mdf@frametitrerulecolor,%
2646   fillcolor=\mdf@frametitrerulecolor,%
2647   fillstyle=solid,dimen=outer,%
2648 }
2649 %

```

<code>\mdf@put@frametitulerule</code>

frametitulerule with pstricks

```

2650 \def\mdf@@frametitulerule{%
2651   \ifbool{mdf@frametitulerule}{%
2652     \vbox{\hsize0pt
2653       \par\unskip\vskip\mdf@frametitlebelowskip@length
2654       \noindent\rlap{%
2655         \begin{group}%
2656         \begin{pspicture}(0,0)(0,\mdf@frametitulerulewidth@length)
2657           \psframe[style=mdfframetitulerule](!\ptTpsL{innerleftmargin} neg 0)%
2658                               (! \ptTpsL{innerrightmargin}
2659                               \ptTpsL{\mdfframetitleboxwidth} add \ptTpsL{frametitulerulewidth})
2660         \end{pspicture}
2661         \end{group}
2662       }%
2663     }{}
2664   \par\unskip\vskip\mdf@innertopmargin@length%
2665 }%
2666 %
2667 % \begin{macro}{mdf@putbox@single}
2668 % Single output
2669 %   \begin{macrocode}
2670 % Info zu den verwendeten Punkten:
2671 % 0 ist die untere linke Ecke der Mitte der middleline
2672 % P ist die obere rechte Ecke der Mitte der middleline
2673 % A ist der Punkt fuer den anchor (d.h. die untere linke Ecke) der Ausgabebox
2674 \def\mdf@putbox@single{%
2675   \ifvoid\mdf@splitbox@one
2676   \else%
2677     \mdf@makebox@out{%
2678       \mdf@makeboxalign@left%
2679       \setlength\mdfboundingboxwidth{\wd\mdf@splitbox@one}%
2680       \advance\mdfboundingboxwidth by \mdf@innerleftmargin@length\relax%
2681       \advance\mdfboundingboxwidth by \mdf@innerrightmargin@length\relax%
2682       \ifbool{mdf@leftline}{%
2683         \advance\mdfboundingboxwidth by \mdf@innerlinewidth@length\relax%
2684         \advance\mdfboundingboxwidth by \mdf@middlelinewidth@length\relax%
2685         \advance\mdfboundingboxwidth by \mdf@outerlinewidth@length\relax}}{%
2686       \ifbool{mdf@rightline}{%
2687         \advance\mdfboundingboxwidth by \mdf@innerlinewidth@length\relax%
2688         \advance\mdfboundingboxwidth by \mdf@middlelinewidth@length\relax%
2689         \advance\mdfboundingboxwidth by \mdf@outerlinewidth@length\relax}}}%
2690 %
2691   \setlength\mdfboundingboxheight{\dimexpr\ht\mdf@splitbox@one+\dp\mdf@splitbox@one\relax}%
2692   \advance\mdfboundingboxheight by \mdf@innerbottommargin@length\relax%
2693   \advance\mdfboundingboxheight by \mdf@innertopmargin@length\relax%
2694   \ifbool{mdf@topline}{%
2695     \advance\mdfboundingboxheight by \mdf@innerlinewidth@length\relax%
2696     \advance\mdfboundingboxheight by \mdf@middlelinewidth@length\relax%
2697     \advance\mdfboundingboxheight by \mdf@outerlinewidth@length\relax}}{%
2698   \ifbool{mdf@bottomline}{%
2699     \advance\mdfboundingboxheight by \mdf@innerlinewidth@length\relax%
2700     \advance\mdfboundingboxheight by \mdf@middlelinewidth@length\relax%
2701     \advance\mdfboundingboxheight by \mdf@outerlinewidth@length\relax}}}%
2702 %

```

```

2703 \setlength\mdftotallinewidth{\dimexpr\mdf@innerlinewidth@length%
2704                                     +\mdf@middlelinewidth@length
2705                                     +\mdf@outerlinewidth@length\relax}%
2706 \psset{unit=1truecm}%
2707 \mdf@makebox@in[\mdf@boundingboxwidth]{%
2708     \null%
2709     \begin{pspicture}(0,0)(\mdf@boundingboxwidth,\mdf@boundingboxheight)
2710         \mdfpstricks@settings%
2711         \psset{linearc=\mdf@roundcorner@length, cornersize=absolut,}%
2712         \expandafter\psset\expandafter{\mdf@psset@local}%
2713         \pnode(\mdf@innerleftmargin@length,\mdf@innerbottommargin@length){mdf@A}
2714         \pnode(0,0){mdf@0}
2715         \pnode(\mdf@boundingboxwidth,\mdf@boundingboxheight){mdf@P}
2716         \ifbool{mdf@leftline}%
2717             {%
2718                 \nodexn{(mdf@A)+(\mdf@outerlinewidth@length,0)
2719                         +(\mdf@middlelinewidth@length,0)
2720                         +(\mdf@innerlinewidth@length,0)}{mdf@A}%
2721                 \nodexn{(mdf@0)+(\mdf@outerlinewidth@length,0)
2722                         +0.5(\mdf@middlelinewidth@length,0)}{mdf@0}%
2723             }{}%
2724         \ifbool{mdf@rightline}%
2725             {%
2726                 \nodexn{(mdf@P)-(\mdf@outerlinewidth@length,0)
2727                         -0.5(\mdf@middlelinewidth@length,0)}{mdf@P}%
2728             }{}%
2729         \ifbool{mdf@bottomline}%
2730             {%
2731                 \nodexn{(mdf@A)+(0,\mdf@outerlinewidth@length)
2732                         +(0,\mdf@middlelinewidth@length)
2733                         +(0,\mdf@innerlinewidth@length)}{mdf@A}%
2734                 \nodexn{(mdf@0)+(0,\mdf@outerlinewidth@length)
2735                         +0.5(0,\mdf@middlelinewidth@length)}{mdf@0}%
2736             }{}%
2737         \ifbool{mdf@topline}%
2738             {%
2739                 \nodexn{(mdf@P)-(0,\mdf@outerlinewidth@length)
2740                         -0.5(0,\mdf@middlelinewidth@length)}{mdf@P}
2741             }{}%
2742         \ifbool{mdf@shadow}
2743             {\psframe[style=mdfshadow](mdf@0)(mdf@P)}{}
2744 % \psclip{%
2745 %Four lines
2746     \mdf@test@ltrb{\mdf@pstricksbox@fl{mdf@0}{mdf@P}}{}
2747 %three lines
2748     \mdf@test@ltb{\mdf@pstricksbox@tl{(mdf@P|mdf@0)(mdf@0)(mdf@0|mdf@P)(mdf@P)}}{}
2749     \mdf@test@trb{\mdf@pstricksbox@tl{(mdf@0)(mdf@P|mdf@0)(mdf@P)(mdf@0|mdf@P)}}{}
2750     \mdf@test@ltr{\mdf@pstricksbox@tl{(mdf@0)(mdf@0|mdf@P)(mdf@P)(mdf@P|mdf@0)}}{}%
2751     \mdf@test@lrb{\mdf@pstricksbox@tl{(mdf@0|mdf@P)(mdf@0)(mdf@P|mdf@0)(mdf@P)}}{}%
2752 %two lines combined
2753     \mdf@test@lb{\mdf@pstricksbox@tcl{(mdf@P|mdf@0)(mdf@P)(mdf@0|mdf@P)}%
2754                 {(mdf@0|mdf@P)(mdf@0)(mdf@P|mdf@0)}}{}
2755     \mdf@test@rb{\mdf@pstricksbox@tcl{(mdf@P)(mdf@0|mdf@P)(mdf@0)}%
2756                 {(mdf@0)(mdf@P|mdf@0)(mdf@P)}}{}
2757     \mdf@test@tr{\mdf@pstricksbox@tcl{(mdf@P|mdf@0)(mdf@0)(mdf@0|mdf@P)}%
2758                 {(mdf@0|mdf@P)(mdf@P)(mdf@P|mdf@0)}}{}

```

```

2759     \mdf@test@lt{\mdf@pstricksbox@tcl{(mdf@0)(mdf@P|mdf@0)(mdf@P)}%
2760             {(mdf@0)(mdf@0|mdf@P)(mdf@P)}}{}
2761     %two lines not combinded combinded
2762     \mdf@test@lr{\mdf@pstricksbox@tncl{(mdf@0|mdf@P)}{(mdf@P|mdf@0)}
2763             {}}
2764     \mdf@test@tb{\mdf@pstricksbox@tncl{(mdf@P|mdf@0)}{(mdf@0|mdf@P)}
2765             {}}
2766     %single line
2767     \mdf@test@l{\mdf@pstricksbox@ol{(mdf@0)(mdf@0|mdf@P)}}{}
2768     \mdf@test@r{\mdf@pstricksbox@ol{(mdf@P)(mdf@P|mdf@0)}}{}
2769     \mdf@test@t{\mdf@pstricksbox@ol{(mdf@P)(mdf@0|mdf@P)}}{}
2770     \mdf@test@b{\mdf@pstricksbox@ol{(mdf@0)(mdf@P|mdf@0)}}{}
2771     %no line
2772     \mdf@test@noline{\psframe[style=mdfbackgroundstyle](mdf@0)(mdf@P)}{}
2773 %
2774     %Frametitlebackground
2775     \drawbrackgroundframetitle@single
2776     %output%
2777     \rput[bl](mdf@A){\box\mdf@splitbox@one}
2778 %
2779 %
2780 %
2781 %
2782 %
2783     \mdf@singleextra
2784     \end{pspicture}%
2785 }%
2786 \mdf@makeboxalign@right%
2787 }%
2788 \fi
2789 }%
2790 \def\drawbrackgroundframetitle@single{%
2791 \ifdefempty{\mdf@frametitle}}{}%
2792 \drawbrackgroundframetitle@@single%
2793 }%
2794 }%
2795 \def\drawbrackgroundframetitle@@single{%
2796 \begingroup%
2797 \ifbool{mdf@leftline}{%
2798 \nodexn{(mdf@0)+(\mdf@innerlinewidth@length,0)
2799 +0.5(\mdf@middlelinewidth@length,0)}{mdf@0}%
2800 }{}%
2801 \ifbool{mdf@rightline}{%
2802 \nodexn{(mdf@P)-(\mdf@innerlinewidth@length,0)
2803 -0.5(\mdf@middlelinewidth@length,0)}{mdf@P}%
2804 }{}%
2805 \ifbool{mdf@topline}{%
2806 \nodexn{(mdf@P)-(0,\mdf@innerlinewidth@length)
2807 -0.5(0,\mdf@middlelinewidth@length)}{mdf@P}%
2808 }{}%
2809 \nodexn{(mdf@P)-(0,\mdfframetitleboxtotalheight)}{mdf@F}%
2810 \psline[style=mdfframetitlebackgroundstyle](mdf@0|mdf@F)(mdf@0|mdf@P)
2811 (mdf@P)(mdf@P|mdf@F)%
2812 \endgroup
2813 }

```

```
\mdf@putbox@first
```

First output

```

2814 \def\mdf@putbox@first{%
2815   \ifvoid\mdf@splitbox@two
2816   \else%
2817     \mdf@makebox@out{%
2818       \mdf@makeboxalign@left%
2819       %\ifbool{mdf@leftline}{\hspace*{\mdf@middlelinewidth@length}}{%
2820       \setlength\mdfboundingboxwidth{\wd\mdf@splitbox@two}%
2821       \advance\mdfboundingboxwidth by \mdf@innerleftmargin@length\relax%
2822       \advance\mdfboundingboxwidth by \mdf@innerrightmargin@length\relax%
2823       \ifbool{mdf@leftline}{%
2824         \advance\mdfboundingboxwidth by \mdf@innerlinewidth@length\relax%
2825         \advance\mdfboundingboxwidth by \mdf@middlelinewidth@length\relax%
2826         \advance\mdfboundingboxwidth by \mdf@outerlinewidth@length\relax}}{%
2827       \ifbool{mdf@rightline}{%
2828         \advance\mdfboundingboxwidth by \mdf@innerlinewidth@length\relax%
2829         \advance\mdfboundingboxwidth by \mdf@middlelinewidth@length\relax%
2830         \advance\mdfboundingboxwidth by \mdf@outerlinewidth@length\relax}}{%
2831       \setlength\mdfboundingboxheight{\dimexpr\ht\mdf@splitbox@two+\dp\mdf@splitbox@two\relax}%
2832       \advance\mdfboundingboxheight by \mdf@innertopmargin@length\relax%
2833       \advance\mdfboundingboxheight by \mdf@splitbottomskip@length\relax%
2834       \ifbool{mdf@topline}{%
2835         \advance\mdfboundingboxheight by \mdf@innerlinewidth@length\relax%
2836         \advance\mdfboundingboxheight by \mdf@middlelinewidth@length\relax%
2837         \advance\mdfboundingboxheight by \mdf@outerlinewidth@length\relax}}{%
2838       %%%%%%%%%%
2839       \ifbool{mdf@everyline}{%
2840       \ifbool{mdf@bottomline}{%
2841         \advance\mdfboundingboxheight by \mdf@innerlinewidth@length\relax%
2842         \advance\mdfboundingboxheight by \mdf@middlelinewidth@length\relax%
2843         \advance\mdfboundingboxheight by \mdf@outerlinewidth@length\relax}}{%
2844       }}%
2845       %%%%%%%%%%
2846       \psset{linearc=\mdf@roundcorner@length, cornersize=absolute}%
2847       \expandafter\psset\expandafter{\mdf@psset@local}%
2848       \mdf@makebox@in[\mdfboundingboxwidth]{%
2849         \null%
2850         \psset{unit=1truecm}%
2851         \ifdimgreater{\mdfboundingboxheight}{\vsize}
2852           {\begin{pspicture}(0,0)(\mdfboundingboxwidth,\vsize)}
2853           {\begin{pspicture}(0,0)(\mdfboundingboxwidth,\mdfboundingboxheight)}
2854             \mdfpstricks@settings%
2855             \psset{linearc=\mdf@roundcorner@length, cornersize=absolut,}%
2856             \expandafter\psset\expandafter{\mdf@psset@local}%
2857             \node(\mdf@innerleftmargin@length,\mdf@splitbottomskip@length){mdf@A}
2858             \node(0,0){mdf@0}
2859             \node(\mdfboundingboxwidth,\mdfboundingboxheight){mdf@P}
2860             \ifbool{mdf@leftline}%
2861               {%
2862               \nodexn{(mdf@A)+(\mdf@outerlinewidth@length,0)
2863                 +(\mdf@middlelinewidth@length,0)
2864                 +(\mdf@innerlinewidth@length,0)}{mdf@A}
2865               \nodexn{(mdf@0)+(\mdf@outerlinewidth@length,0)
2866                 +0.5(\mdf@middlelinewidth@length,0)}{mdf@0}

```

```

2867     }{}%
2868 \ifbool{mdf@rightline}%
2869     {%
2870     \nodexn{(mdf@P) - (\mdf@outerlinewidth@length,0)
2871             -0.5(\mdf@middlelinewidth@length,0)}{mdf@P}
2872     }{}%
2873 \ifbool{mdf@topline}%
2874     {%
2875     \nodexn{(mdf@P) - (0,\mdf@outerlinewidth@length)
2876             -0.5(0,\mdf@middlelinewidth@length)}{mdf@P}
2877     }{}%
2878 %%%%%%%%%%%
2879 \ifbool{mdf@everyline}{%
2880 \ifbool{mdf@bottomline}%
2881     {%
2882     \nodexn{(mdf@A)+(0,\mdf@outerlinewidth@length)
2883             +(0,\mdf@middlelinewidth@length)
2884             +(0,\mdf@innerlinewidth@length)}{mdf@A}%
2885     \nodexn{(mdf@0)+(0,\mdf@outerlinewidth@length)
2886             +0.5(0,\mdf@middlelinewidth@length)}{mdf@0}%
2887     }{}%
2888     }{}%
2889 %%%%%%%%%%%
2890 \ifbool{mdf@shadow}
2891     {\pscustom[style=mdfshadow,linestyle=none]{%
2892     \psline[linejoin=2,linecap=1,](mdf@P|mdf@0)(mdf@P)(mdf@0|mdf@P)%
2893     \psline[linejoin=2,linecap=1,linearc=\z@](mdf@0|mdf@P)(mdf@0)(mdf@P|mdf@0)
2894     \closedshadow
2895     }
2896     }{}
2897 % \psclip{
2898 %%%%%%%%%%%
2899 \ifbool{mdf@everyline}{%
2900     %Four lines
2901     \mdf@test@ltr{\mdf@pstricksbox@fl{mdf@0}{mdf@P}}{}
2902     %three lines
2903     \mdf@test@ltb{\mdf@pstricksbox@tl{(mdf@P|mdf@0)(mdf@0)(mdf@0|mdf@P)(mdf@P)}}{}
2904     \mdf@test@trb{\mdf@pstricksbox@tl{(mdf@0)(mdf@P|mdf@0)(mdf@P)(mdf@0|mdf@P)}}{}
2905     \mdf@test@ltr{\mdf@pstricksbox@tl{(mdf@0)(mdf@0|mdf@P)(mdf@P)(mdf@P|mdf@0)}}{}
2906     \mdf@test@lrb{\mdf@pstricksbox@tl{(mdf@0|mdf@P)(mdf@0)(mdf@P|mdf@0)(mdf@P)}}{}
2907     %two lines combined
2908     \mdf@test@lb{\mdf@pstricksbox@tcl{(mdf@P|mdf@0)(mdf@P)(mdf@0|mdf@P)}%
2909                 {(mdf@0|mdf@P)(mdf@0)(mdf@P|mdf@0)}}{}
2910     \mdf@test@rb{\mdf@pstricksbox@tcl{(mdf@P)(mdf@0|mdf@P)(mdf@0)}%
2911                 {(mdf@0)(mdf@P|mdf@0)(mdf@P)}}{}
2912     \mdf@test@tr{\mdf@pstricksbox@tcl{(mdf@P|mdf@0)(mdf@0)(mdf@0|mdf@P)}%
2913                 {(mdf@0|mdf@P)(mdf@P)(mdf@P|mdf@0)}}{}
2914     \mdf@test@lt{\mdf@pstricksbox@tcl{(mdf@0)(mdf@P|mdf@0)(mdf@P)}%
2915                 {(mdf@0)(mdf@0|mdf@P)(mdf@P)}}{}
2916     %two lines not combined
2917     \mdf@test@lr{\mdf@pstricksbox@tncl{(mdf@0|mdf@P)}{(mdf@P|mdf@0)}}{}
2918     }{}
2919     \mdf@test@tb{\mdf@pstricksbox@tncl{(mdf@P|mdf@0)}{(mdf@0|mdf@P)}}{}
2920     }{}
2921     %single line
2922     \mdf@test@l{\mdf@pstricksbox@ol{(mdf@0)(mdf@0|mdf@P)}}{}

```

```

2923     \mdf@test@r{\mdf@pstricksbox@ol{(mdf@P)(mdf@P|mdf@O)}}{}
2924     \mdf@test@t{\mdf@pstricksbox@ol{(mdf@P)(mdf@O|mdf@P)}}{}
2925     \mdf@test@b{\mdf@pstricksbox@ol{(mdf@O)(mdf@P|mdf@O)}}{}
2926     %no line
2927     \mdf@test@noline{\psframe[style=mdfbackgroundstyle](mdf@O)(mdf@P)}}{}%
2928 }{}%
2929 %Four or Three lines
2930 \ifboolexpr{test {\mdf@test@lrb} or test {\mdf@test@ltr}}%
2931   {\mdf@pstricksbox@tcl{(mdf@O)(mdf@O|mdf@P)(mdf@P)(mdf@P|mdf@O)}}%
2932   }{}%
2933 %two combined lines
2934 \ifboolexpr{test {\mdf@test@ltb} or test {\mdf@test@lt}}
2935   {\mdf@pstricksbox@tcl{(mdf@O)(mdf@P|mdf@O)(mdf@P)}%
2936     {(mdf@O)(mdf@O|mdf@P)(mdf@P)}}{}
2937 \ifboolexpr{test {\mdf@test@trb} or test {\mdf@test@tr}}%
2938   {\mdf@pstricksbox@tcl{(mdf@P|mdf@O)(mdf@O)(mdf@O|mdf@P)}%
2939     {(mdf@O|mdf@P)(mdf@P)(mdf@P|mdf@O)}}{}
2940 %two not combined lines
2941 \ifboolexpr{test {\mdf@test@lrb} or test {\mdf@test@lr}}%
2942   {\mdf@pstricksbox@tnccl{(mdf@O|mdf@P)}{(mdf@P|mdf@O)}}{}
2943 %single line
2944 \ifboolexpr{test {\mdf@test@tb} or test {\mdf@test@t}}%
2945   {\mdf@pstricksbox@ol{(mdf@P)(mdf@O|mdf@P)}}{}
2946 \ifboolexpr{test {\mdf@test@lb} or test {\mdf@test@l}}%
2947   {\mdf@pstricksbox@ol{(mdf@O)(mdf@O|mdf@P)}}{}
2948 \ifboolexpr{test {\mdf@test@rb} or test {\mdf@test@r}}%
2949   {\mdf@pstricksbox@ol{(mdf@P)(mdf@P|mdf@O)}}{}
2950 %no line
2951 \mdf@test@b{\psframe[style=mdfbackgroundstyle](mdf@O)(mdf@P)}{}%
2952 \mdf@test@noline{\psframe[style=mdfbackgroundstyle](mdf@O)(mdf@P)}{}%
2953 }{}%
2954 %
2955 %Frametitlebackground
2956 \drawbackgroundframetitle@first
2957 %output%
2958 \rput[bl](mdf@A){\box\mdf@splitbox@two}
2959 % \psdot(mdf@A)\uput[90](mdf@A){mdf at A}
2960 % \psdot(mdf@P)\uput[90](mdf@P){mdf at P}
2961 % \psdot(mdf@O)\uput[90](mdf@O){mdf at O}
2962 % \endpsclip
2963 \mdf@firstextra
2964 \end{pspicture}
2965 }{}%
2966 \mdf@makeboxalign@right%
2967 }{}%
2968 \fi
2969 }{}%
2970 \def\drawbackgroundframetitle@first{%
2971 \ifdefempty{\mdf@frametitle}}{}%
2972 \ifdimgreater{\mdfboundingboxheight}{\mdfframetitleboxtotalheight}%
2973 {%
2974 \drawbackgroundframetitle@@first
2975 \global\mdfframetitleboxtotalheight=-\p@%
2976 }{\mdf@PackageWarning{You got a page break inside the frame title\MessageBreak
2977   Currently this isn't well supported}%
2978 \drawbackgroundframetitle@@first

```



```

2979 \global\mdfframetitleboxtotalheight=\dimexpr\mdfframetitleboxtotalheight
2980         -\mdfboundingboxheight
2981         -\mdf@innerlinewidth@length-0.5\mdf@middlelinewidth@length%
2982         +\mdf@frametitlebelowskip@length+\mdf@splitbottomskip@length
2983         +\mdf@splittopskip@length
2984         +\dp\strutbox\relax%
2985 }%
2986 }%
2987 }%
2988 \def\drawbackgroundframetitle@@first{%
2989 \begingroup%
2990 \ifbool{mdf@leftline}{%
2991     \nodexn{(mdf@0)+(\mdf@innerlinewidth@length,0)
2992             +0.5(\mdf@middlelinewidth@length,0)}{mdf@0}%
2993     }{}%
2994 \ifbool{mdf@rightline}{%
2995     \nodexn{(mdf@P)-(\mdf@innerlinewidth@length,0)
2996             -0.5(\mdf@middlelinewidth@length,0)}{mdf@P}%
2997     }{}%
2998 \ifbool{mdf@topline}{%
2999     \nodexn{(mdf@P)-(0,\mdf@innerlinewidth@length)
3000             -0.5(0,\mdf@middlelinewidth@length)}{mdf@P}%
3001     }{}%
3002 \ifdimgreater{\mdfboundingboxheight}{\mdfframetitleboxtotalheight}
3003     {\nodexn{(mdf@P)-(0,\mdfframetitleboxtotalheight)}{mdf@F}}%
3004     {\nodexn{(mdf@0)}{mdf@F}}%
3005 \psline[style=mdfframetitlebackgroundstyle](mdf@0|mdf@F)(mdf@0|mdf@P)
3006         (mdf@P)(mdf@P|mdf@F)%
3007 \endgroup
3008 }

```

\mdf@putbox@middle

Middle output

```

3009 \def\mdf@putbox@middle{%
3010 \ifvoid\mdf@splitbox@two
3011 \else%
3012 \mdf@makebox@out{%
3013 \mdf@makebox@align@left%
3014 % \ifbool{mdf@leftline}{\hspace*{\mdf@middlelinewidth@length}}{}%
3015 \setlength\mdfboundingboxwidth{\wd\mdf@splitbox@two}%
3016 \advance\mdfboundingboxwidth by \mdf@innerleftmargin@length\relax%
3017 \advance\mdfboundingboxwidth by \mdf@innerrightmargin@length\relax%
3018 \ifbool{mdf@leftline}{%
3019 \advance\mdfboundingboxwidth by \mdf@innerlinewidth@length\relax%
3020 \advance\mdfboundingboxwidth by \mdf@middlelinewidth@length\relax%
3021 \advance\mdfboundingboxwidth by \mdf@outerlinewidth@length\relax}{}%
3022 \ifbool{mdf@rightline}{%
3023 \advance\mdfboundingboxwidth by \mdf@innerlinewidth@length\relax%
3024 \advance\mdfboundingboxwidth by \mdf@middlelinewidth@length\relax%
3025 \advance\mdfboundingboxwidth by \mdf@outerlinewidth@length\relax}{}%
3026 \setlength\mdfboundingboxheight{\dimexpr\ht\mdf@splitbox@two+\dp\mdf@splitbox@two\relax}%
3027 \advance\mdfboundingboxheight by \mdf@splitbottomskip@length\relax%
3028 %%%
3029 \ifbool{mdf@everyline}{%

```

```

3030 \ifbool{mdf@topline}{%
3031 \advance\mdfboundingboxheight by \mdf@innerlinewidth@length\relax%
3032 \advance\mdfboundingboxheight by \mdf@middlelinewidth@length\relax%
3033 \advance\mdfboundingboxheight by \mdf@outerlinewidth@length\relax}}{%
3034 \ifbool{mdf@bottomline}{%
3035 \advance\mdfboundingboxheight by \mdf@innerlinewidth@length\relax%
3036 \advance\mdfboundingboxheight by \mdf@middlelinewidth@length\relax%
3037 \advance\mdfboundingboxheight by \mdf@outerlinewidth@length\relax}}{%
3038 }{}%
3039 %%%
3040 \psset{unit=1truecm}%
3041 \mdf@makebox@in[\mdfboundingboxwidth]{%
3042 \null%
3043 \ifdimgreater{\mdfboundingboxheight}{\vsize}
3044 {\begin{pspicture}(0,0)(\mdfboundingboxwidth,\vsize)}
3045 {\begin{pspicture}(0,0)(\mdfboundingboxwidth,\mdfboundingboxheight)}
3046 \mdfpstricks@settings%
3047 \psset{lineararc=0pt, cornersize=absolut,}%
3048 \expandafter\psset\expandafter{\mdf@psset@local}%
3049 %%%
3050 \nnode(\mdf@innerleftmargin@length,\mdf@splitbottomskip@length){mdf@A}
3051 \nnode(0,0){mdf@0}
3052 \nnode(\mdfboundingboxwidth,\mdfboundingboxheight){mdf@P}
3053 \ifbool{mdf@leftline}{%
3054 {%
3055 \nodexn{(mdf@A)+(\mdf@outerlinewidth@length,0)
3056 +(\mdf@middlelinewidth@length,0)
3057 +(\mdf@innerlinewidth@length,0)}{mdf@A}
3058 \nodexn{(mdf@0)+(\mdf@outerlinewidth@length,0)
3059 +0.5(\mdf@middlelinewidth@length,0)}{mdf@0}
3060 }{}%
3061 \ifbool{mdf@rightline}{%
3062 {%
3063 \nodexn{(mdf@P)-(\mdf@outerlinewidth@length,0)
3064 -0.5(\mdf@middlelinewidth@length,0)}{mdf@P}
3065 }{}%
3066 %%
3067 %%%
3068 \ifbool{mdf@everyline}{%
3069 \ifbool{mdf@bottomline}{%
3070 {%
3071 \nodexn{(mdf@A)+(0,\mdf@outerlinewidth@length)
3072 +(0,\mdf@middlelinewidth@length)
3073 +(0,\mdf@innerlinewidth@length)}{mdf@A}%
3074 \nodexn{(mdf@0)+(0,\mdf@outerlinewidth@length)
3075 +0.5(0,\mdf@middlelinewidth@length)}{mdf@0}%
3076 }{}%
3077 \ifbool{mdf@topline}{%
3078 {%
3079 \nodexn{(mdf@P)-(0,\mdf@outerlinewidth@length)
3080 -0.5(0,\mdf@middlelinewidth@length)}{mdf@P}
3081 }{}%
3082 }{}%
3083 %%%
3084 %%
3085 \ifbool{mdf@shadow}

```

```

3086     {\psframe[style=mdfshadow](mdf@0)(mdf@P)}{ }
3087 %%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%%
3088     \ifbool{mdf@everyline}{%
3089         %Four lines
3090         \mdf@test@ltr{\mdf@pstricksbox@fl{mdf@0}{mdf@P}}{ }
3091         %three lines
3092         \mdf@test@ltb{\mdf@pstricksbox@tl{(mdf@P|mdf@0)(mdf@0)(mdf@0|mdf@P)(mdf@P)}{ } }
3093         \mdf@test@trb{\mdf@pstricksbox@tr{(mdf@0)(mdf@P|mdf@0)(mdf@P)(mdf@0|mdf@P)}{ } }
3094         \mdf@test@ltr{\mdf@pstricksbox@tl{(mdf@0)(mdf@0|mdf@P)(mdf@P)(mdf@P|mdf@0)}{ } }
3095         \mdf@test@lrb{\mdf@pstricksbox@tl{(mdf@0|mdf@P)(mdf@0)(mdf@P|mdf@0)(mdf@P)}{ } }
3096         %two lines combined
3097         \mdf@test@lb{\mdf@pstricksbox@tcl{(mdf@P|mdf@0)(mdf@P)(mdf@0|mdf@P)}%
3098             {(mdf@0|mdf@P)(mdf@0)(mdf@P|mdf@0)}{ } }
3099         \mdf@test@rb{\mdf@pstricksbox@tcl{(mdf@P)(mdf@0|mdf@P)(mdf@0)}%
3100             {(mdf@0)(mdf@P|mdf@0)(mdf@P)}{ } }
3101         \mdf@test@tr{\mdf@pstricksbox@tcl{(mdf@P|mdf@0)(mdf@0)(mdf@0|mdf@P)}%
3102             {(mdf@0|mdf@P)(mdf@P)(mdf@P|mdf@0)}{ } }
3103         \mdf@test@lt{\mdf@pstricksbox@tcl{(mdf@0)(mdf@P|mdf@0)(mdf@P)}%
3104             {(mdf@0)(mdf@0|mdf@P)(mdf@P)}{ } }
3105         %two lines not combined
3106         \mdf@test@lr{\mdf@pstricksbox@tncl{(mdf@0|mdf@P)}{(mdf@P|mdf@0)}
3107             { } }
3108         \mdf@test@tb{\mdf@pstricksbox@tncl{(mdf@P|mdf@0)}{(mdf@0|mdf@P)}
3109             { } }
3110         %single line
3111         \mdf@test@l{\mdf@pstricksbox@ol{(mdf@0)(mdf@0|mdf@P)}{ } }
3112         \mdf@test@r{\mdf@pstricksbox@ol{(mdf@P)(mdf@P|mdf@0)}{ } }
3113         \mdf@test@t{\mdf@pstricksbox@ol{(mdf@P)(mdf@0|mdf@P)}{ } }
3114         \mdf@test@b{\mdf@pstricksbox@ol{(mdf@0)(mdf@P|mdf@0)}{ } }
3115         %no line
3116         \mdf@test@noline{\psframe[style=mdfbackgroundstyle](mdf@0)(mdf@P)}{ } }
3117     }{ }
3118     \ifboolexpr{bool {mdf@leftline} and bool {mdf@rightline}}%
3119         {\mdf@pstricksbox@tncl{(mdf@0|mdf@P)}{(mdf@P|mdf@0)}{ } }
3120     \ifboolexpr{bool {mdf@leftline} and not (bool {mdf@rightline})}%
3121         {\mdf@pstricksbox@ol{(mdf@0)(mdf@0|mdf@P)}{ } }
3122     \ifboolexpr{not (bool {mdf@leftline}) and bool {mdf@rightline}}%
3123         {\mdf@pstricksbox@ol{(mdf@P)(mdf@P|mdf@0)}{ } }
3124     \ifboolexpr{not (bool {mdf@leftline}) and not (bool {mdf@rightline})}%
3125         {\psframe[style=mdfbackgroundstyle](mdf@0)(mdf@P)}{ } }
3126 }%
3127 %Frametitlebackground
3128     \drawbackgroundframetitle@middle
3129     %output%
3130     \rput[bl](mdf@A){\box\mdf@splitbox@two}
3131 %     \psdot(mdf@A)\uput[90](mdf@A){mdf at A}
3132 %     \psdot(mdf@P)\uput[90](mdf@P){mdf at P}
3133 %     \psdot(mdf@0)\uput[90](mdf@0){mdf at 0}
3134     \mdf@middleextra
3135     \end{pspicture}%
3136 }%
3137 \mdf@makeboxalign@right%
3138 }%
3139 \fi
3140 }%
3141 \def\drawbackgroundframetitle@middle{%

```

```

3142 \ifdefempty{\mdf@frametitle}{}{%
3143   \ifdimless{\mdfframetitleboxtotalheight}{\z@}
3144   }{%
3145     \drawbrackgroundframetitle@@middle
3146     \global\mdfframetitleboxtotalheight=-\p@\relax%
3147   }%
3148 }%
3149 }%
3150 \def\drawbrackgroundframetitle@@middle{%
3151   \begingroup%
3152   \ifbool{mdf@leftline}{%
3153     \nodexn{(mdf@0)+(\mdf@innerlinewidth@length,0)
3154             +0.5(\mdf@middlelinewidth@length,0)}{mdf@0}%
3155     }{%
3156     \ifbool{mdf@rightline}{%
3157       \nodexn{(mdf@P)-(\mdf@innerlinewidth@length,0)
3158               -0.5(\mdf@middlelinewidth@length,0)}{mdf@P}%
3159       }{%
3160       \nodexn{(mdf@P)-(0,\mdfframetitleboxtotalheight)}{mdf@F}%
3161       \psline[style=mdfframetitlebackgroundstyle,linearc=\z@](mdf@0|mdf@F)(mdf@0|mdf@P)
3162                               (mdf@P)(mdf@P|mdf@F)%
3163       \endgroup
3164     }

```

\mdf@putbox@second

Last output

```

3165 \def\mdf@putbox@second{
3166   \ifvoid\mdf@splitbox@one
3167   \else%
3168     \mdf@makebox@out{%
3169       \mdf@makeboxalign@left%
3170     %   \ifbool{mdf@leftline}{\hspace*{\mdf@middlelinewidth@length}}{%
3171     \setlength\mdfboundingboxwidth{\wd\mdf@splitbox@one}%
3172     \advance\mdfboundingboxwidth by \mdf@innerleftmargin@length\relax%
3173     \advance\mdfboundingboxwidth by \mdf@innerrightmargin@length\relax%
3174     \ifbool{mdf@leftline}{%
3175       \advance\mdfboundingboxwidth by \mdf@innerlinewidth@length\relax%
3176       \advance\mdfboundingboxwidth by \mdf@middlelinewidth@length\relax%
3177       \advance\mdfboundingboxwidth by \mdf@outerlinewidth@length\relax}{%
3178     \ifbool{mdf@rightline}{%
3179       \advance\mdfboundingboxwidth by \mdf@innerlinewidth@length\relax%
3180       \advance\mdfboundingboxwidth by \mdf@middlelinewidth@length\relax%
3181       \advance\mdfboundingboxwidth by \mdf@outerlinewidth@length\relax}{%
3182     \setlength\mdfboundingboxheight{\dimexpr\ht\mdf@splitbox@one+\dp\mdf@splitbox@one\relax}%
3183     \advance\mdfboundingboxheight by \mdf@innerbottommargin@length\relax%
3184     \ifbool{mdf@bottomline}{%
3185       \advance\mdfboundingboxheight by \mdf@innerlinewidth@length\relax%
3186       \advance\mdfboundingboxheight by \mdf@middlelinewidth@length\relax%
3187       \advance\mdfboundingboxheight by \mdf@outerlinewidth@length\relax}{%
3188     %%%
3189     \ifbool{mdf@everyline}{%
3190     \ifbool{mdf@topline}{%
3191       \advance\mdfboundingboxheight by \mdf@innerlinewidth@length\relax%
3192       \advance\mdfboundingboxheight by \mdf@middlelinewidth@length\relax%

```

```

3193     \advance\mdfboundingboxheight by \mdf@outerlinewidth@length\relax}}}%
3194   }}}%
3195 %%%%%%%%%%
3196     \psset{unit=1truecm}%
3197     \mdf@makebox@in[\mdfboundingboxwidth]{%
3198       \null%
3199       \begin{pspicture}(0,0)(\mdfboundingboxwidth,\mdfboundingboxheight)
3200         \mdfpstricks@settings%
3201         \psset{linearc=\mdf@roundcorner@length, cornersize=absolut,}%
3202         \expandafter\psset\expandafter{\mdf@psset@local}%
3203         \pnode(\mdf@innerleftmargin@length,\mdf@innerbottommargin@length){mdf@A}
3204         \pnode(0,0){mdf@0}
3205         \pnode(\mdfboundingboxwidth,\mdfboundingboxheight){mdf@P}
3206         \ifbool{mdf@leftline}%
3207           {%
3208             \nodexn{(mdf@A)+(\mdf@outerlinewidth@length,0)
3209                   +(\mdf@middlelinewidth@length,0)
3210                   +(\mdf@innerlinewidth@length,0)}{mdf@A}
3211             \nodexn{(mdf@0)+(\mdf@outerlinewidth@length,0)
3212                   +0.5(\mdf@middlelinewidth@length,0)}{mdf@0}
3213           }}}%
3214         \ifbool{mdf@rightline}%
3215           {%
3216             \nodexn{(mdf@P)-(\mdf@outerlinewidth@length,0)
3217                   -0.5(\mdf@middlelinewidth@length,0)}{mdf@P}
3218           }}}%
3219         \ifbool{mdf@bottomline}%
3220           {%
3221             \nodexn{(mdf@A)+(0,\mdf@outerlinewidth@length)
3222                   +(0,\mdf@middlelinewidth@length)
3223                   +(0,\mdf@innerlinewidth@length)}{mdf@A}
3224             \nodexn{(mdf@0)+(0,\mdf@outerlinewidth@length)
3225                   +0.5(0,\mdf@middlelinewidth@length)}{mdf@0}
3226           }}}%
3227 %%%%%%%%%%
3228         \ifbool{mdf@everyline}{%
3229           \ifbool{mdf@topline}%
3230             {%
3231               \nodexn{(mdf@P)-(0,\mdf@outerlinewidth@length)
3232                     -0.5(0,\mdf@middlelinewidth@length)}{mdf@P}
3233             }}}%
3234         }}}%
3235 %%%%%%%%%%
3236     %
3237     \ifbool{mdf@shadow}
3238       {\pscustom[style=mdfshadow,linestyle=none]{%
3239         \psline[linejoin=2,linecap=1,](mdf@0|mdf@P)(mdf@0)(mdf@P|mdf@0)(mdf@P)%
3240         \psline[linejoin=2,linecap=1,linearc=\z@](mdf@0|mdf@P)(mdf@P)
3241         \closedshadow
3242       }
3243     }{}
3244 %%%%%%%%%%
3245     \ifbool{mdf@everyline}{%
3246       %Four lines
3247       \mdf@test@lrb{\mdf@pstricksbox@fl{mdf@0}{mdf@P}}{}
3248       %three lines

```

```

3249     \mdf@test@ltb{\mdf@pstricksbox@tcl{(mdf@P|mdf@O)(mdf@O)(mdf@O|mdf@P)(mdf@P)}}{}
3250     \mdf@test@trb{\mdf@pstricksbox@tcl{(mdf@O)(mdf@P|mdf@O)(mdf@P)(mdf@O|mdf@P)}}{}
3251     \mdf@test@ltr{\mdf@pstricksbox@tcl{(mdf@O)(mdf@O|mdf@P)(mdf@P)(mdf@P|mdf@O)}}{}%
3252     \mdf@test@lrb{\mdf@pstricksbox@tcl{(mdf@O|mdf@P)(mdf@O)(mdf@P|mdf@O)(mdf@P)}}{}%
3253     %two lines combined
3254     \mdf@test@lb{\mdf@pstricksbox@tcl{(mdf@P|mdf@O)(mdf@P)(mdf@O|mdf@P)}%
3255                 {(mdf@O|mdf@P)(mdf@O)(mdf@P|mdf@O)}}{}
3256     \mdf@test@rb{\mdf@pstricksbox@tcl{(mdf@P)(mdf@O|mdf@P)(mdf@O)}%
3257                 {(mdf@O)(mdf@P|mdf@O)(mdf@P)}}{}
3258     \mdf@test@tr{\mdf@pstricksbox@tcl{(mdf@P|mdf@O)(mdf@O)(mdf@O|mdf@P)}%
3259                 {(mdf@O|mdf@P)(mdf@P)(mdf@P|mdf@O)}}{}
3260     \mdf@test@lt{\mdf@pstricksbox@tcl{(mdf@O)(mdf@P|mdf@O)(mdf@P)}%
3261                 {(mdf@O)(mdf@O|mdf@P)(mdf@P)}}{}
3262     %two lines not combined
3263     \mdf@test@lr{\mdf@pstricksbox@tnccl{(mdf@O|mdf@P)}{(mdf@P|mdf@O)}
3264                 {}}
3265     \mdf@test@tb{\mdf@pstricksbox@tnccl{(mdf@P|mdf@O)}{(mdf@O|mdf@P)}
3266                 {}}
3267     %single line
3268     \mdf@test@l{\mdf@pstricksbox@ol{(mdf@O)(mdf@O|mdf@P)}}{}
3269     \mdf@test@r{\mdf@pstricksbox@ol{(mdf@P)(mdf@P|mdf@O)}}{}
3270     \mdf@test@t{\mdf@pstricksbox@ol{(mdf@P)(mdf@O|mdf@P)}}{}
3271     \mdf@test@b{\mdf@pstricksbox@ol{(mdf@O)(mdf@P|mdf@O)}}{}
3272     %no line
3273     \mdf@test@noline{\psframe[style=mdfbackgroundstyle](mdf@O)(mdf@P)}{}%
3274     }{}%
3275     %Four + Three
3276     \ifboolexpr{test {\mdf@test@ltrb} or test {\mdf@test@lrb}}%
3277     {\mdf@pstricksbox@tcl{(mdf@O|mdf@P)(mdf@O)(mdf@P|mdf@O)(mdf@P)}}{}%
3278     %Two combined
3279     \ifboolexpr{test {\mdf@test@ltb} or test {\mdf@test@lb}}%
3280     {\mdf@pstricksbox@tcl{(mdf@P|mdf@O)(mdf@P)(mdf@O|mdf@P)}%
3281                 {(mdf@O|mdf@P)(mdf@O)(mdf@P|mdf@O)}}{}
3282     \ifboolexpr{test {\mdf@test@trb} or test {\mdf@test@rb}}%
3283     {\mdf@pstricksbox@tcl{(mdf@P)(mdf@O|mdf@P)(mdf@O)}%
3284                 {(mdf@O)(mdf@P|mdf@O)(mdf@P)}}{}
3285     %Two not combined
3286     \ifboolexpr{test {\mdf@test@ltr} or test {\mdf@test@lr}}%
3287     {\mdf@pstricksbox@tnccl{(mdf@O|mdf@P)}{(mdf@P|mdf@O)}}{}%
3288     %one line
3289     \ifboolexpr{test {\mdf@test@tb} or test {\mdf@test@b}}%
3290     {\mdf@pstricksbox@ol{(mdf@O)(mdf@P|mdf@O)}}{}
3291     \ifboolexpr{test {\mdf@test@lt} or test {\mdf@test@l}}%
3292     {\mdf@pstricksbox@ol{(mdf@O)(mdf@O|mdf@P)}}{}
3293     \ifboolexpr{test {\mdf@test@tr} or test {\mdf@test@r}}%
3294     {\mdf@pstricksbox@ol{(mdf@P)(mdf@P|mdf@O)}}{}
3295     %no line
3296     \mdf@test@t{\psframe[style=mdfbackgroundstyle](mdf@O)(mdf@P)}{}%
3297     \mdf@test@noline{\psframe[style=mdfbackgroundstyle](mdf@O)(mdf@P)}{}%
3298     }%
3299     %Frametitlebackground
3300     \drawbackgroundframetitle@second
3301     %output%
3302     \rput[bl](mdf@A){\box\mdf@splitbox@one}
3303     \mdf@secondextra
3304     % \psdot(mdf@A)\uput[90](mdf@A){mdf at A}

```

```

3305 %      \psdot(mdf@P)\uput[90](mdf@P){mdf at P}
3306 %      \psdot(mdf@0)\uput[90](mdf@0){mdf at 0}
3307      \end{pspicture}%
3308      }%
3309      \mdf@makeboxalign@right%
3310      }%
3311 \fi
3312 }%
3313 \def\drawbrackgroundframetitle@second{%
3314 \ifdefempty{\mdf@frametitle}{}%
3315   \ifdimless{\mdfframetitleboxtotalheight}{\z@}
3316   {}{%
3317     \drawbrackgroundframetitle@@second
3318   }%
3319 }%
3320 }%
3321 \def\drawbrackgroundframetitle@@second{%
3322 \begingroup%
3323 \ifbool{mdf@leftline}{%
3324   \nodexn{(mdf@0)+(\mdf@innerlinewidth@length,0)
3325     +0.5(\mdf@middlelinewidth@length,0)}{mdf@0}%
3326   }{%
3327 \ifbool{mdf@rightline}{%
3328   \nodexn{(mdf@P)-(\mdf@innerlinewidth@length,0)
3329     -0.5(\mdf@middlelinewidth@length,0)}{mdf@P}%
3330   }{%
3331 \nodexn{(mdf@P)-(0,\mdfframetitleboxtotalheight)}{mdf@F}%
3332 \psline[style=mdfframetitlebackgroundstyle,lineararc=\z@](mdf@0|mdf@F)(mdf@0|mdf@P)
3333   (mdf@P)(mdf@P|mdf@F)%
3334 \endgroup
3335 }

3336 \endinput
3337 %eof

```

C. The file `mdframed-example-default`

```

3338 %Documentation of the package mdframed
3339 %$Id: mdframed.dtx 375 2012-04-08 10:52:22Z marco $
3340 \setcounter{errorcontextlines}{999}
3341 \documentclass[parskip=false,english,11pt]{ltxmdf}
3342 \ltxmdfsetifoot $Id: mdframed.dtx 375 2012-04-08 10:52:22Z marco $
3343
3344 \usepackage{showexpl}
3345 \lstset{style=lstltxmdf,explpreset={pos=b,rframe={}},}
3346
3347 \newcommand\Loadedframemethod{default}
3348 \usepackage[framemethod=\Loadedframemethod]{mdframed}
3349
3350 \title{The \Pack{mdframed} package}
3351 \subtitle{Examples for \Opt{framemethod=\Loadedframemethod}}
3352 \author{\href{mailto:marco.daniel@mada-nada.de}{Marco Daniel}}
3353 \date{\mdfdateID$Id: mdframed.dtx 375 2012-04-08 10:52:22Z marco $}
3354 \version{\mdversion}
3355 \introduction{In this document I collect various examples for \Opt{framemethod=\Loadedframemethod}.

```

```

3356 Some presented examples are more or less exorbitant.}
3357
3358 \mdfsetup{skipabove=\topskip,skipbelow=\topskip}
3359 \newrobustcmd\ExampleText{%
3360     An \textit{inhomogeneous linear} differential equation has the form
3361     \begin{align}
3362         L[v ] = f,
3363     \end{align}
3364     where  $L$  is a linear differential operator,  $v$  is
3365     the dependent variable, and  $f$  is a given non-zero
3366     function of the independent variables alone.
3367 }
3368
3369 \newcounter{examplecount}
3370 \setcounter{examplecount}{0}
3371 \renewcommand\thesubsection{}
3372 \newcommand\Examplesec[1]{%
3373 \stepcounter{examplecount}%
3374 \subsection{Example~\arabic{examplecount}~---#1\relax}%
3375 }
3376
3377 \begin{document}
3378 \maketitle
3379 \section{Loading}
3380 In the preamble only the package \Pack{mdfamed} with the option \Opt{framemethod=\Loadedframemethod}
3381
3382 {\large\color{red!50!black}
3383 \NOTE Every \Cmd{global} inside the examples is necessary to work with the package \Pack{showexpl}.}
3384
3385 \section{Examples}
3386 All examples have the following settings:
3387
3388 \begin{tltxmdfexample}
3389 \mdfsetup{skipabove=\topskip,skipbelow=\topskip}
3390 \newrobustcmd\ExampleText{%
3391 An \textit{inhomogeneous linear} differential equation
3392 has the form
3393 \begin{align}
3394 L[v ] = f,
3395 \end{align}
3396 where  $L$  is a linear differential operator,  $v$  is
3397 the dependent variable, and  $f$  is a given non-zero
3398 function of the independent variables alone.
3399 }
3400 \end{tltxmdfexample}
3401 \clearpage
3402 \Examplesec{very simple}
3403 \begin{LTXexample}
3404 \global\mdfdefinestyle{exampledefault}{%
3405     linecolor=red,linewidth=3pt,%
3406     leftmargin=1cm,rightmargin=1cm
3407 }
3408 \begin{mdfamed}[style=exampledefault]
3409 \ExampleText
3410 \end{mdfamed}
3411 \end{LTXexample}

```



```

3412
3413 \Examplesec{hidden line + frame title}
3414 \begin{LTXexample}
3415 \global\mdfapptodefinestyle{exampledefault}{%
3416   topline=false,rightline=true,bottomline=false}
3417 \begin{mdframed}[style=exampledefault,frametitle={Inhomogeneous linear}]
3418 \ExampleText
3419 \end{mdframed}
3420 \end{LTXexample}
3421 \clearpage
3422
3423 \Examplesec{colored frame title}
3424 \begin{LTXexample}
3425
3426 \global\mdfapptodefinestyle{exampledefault}{%
3427   rightline=true,innerleftmargin=10,innerrightmargin=10,
3428   frametitlerule=true,frametitlerulecolor=green,
3429   frametitlebackgroundcolor=yellow,
3430   frametitlerulewidth=2pt}
3431 \begin{mdframed}[style=exampledefault,frametitle={Inhomogeneous linear}]
3432 \ExampleText
3433 \end{mdframed}
3434 \end{LTXexample}
3435
3436 \Examplesec{framed picture which is centered}
3437 \begin{LTXexample}
3438 \begin{mdframed}[userdefinedwidth=6cm,align=center,
3439   linecolor=blue,linewidth=4pt]
3440 \includegraphics[width=\linewidth]{donald-duck}
3441 \end{mdframed}
3442 \end{LTXexample}
3443
3444 \clearpage
3445 \Examplesec{Theorem environments}
3446 \begin{LTXexample}
3447 \mdfdefinestyle{theoremstyle}{%
3448   linecolor=red,linewidth=2pt,%
3449   frametitlerule=true,%
3450   frametitlebackgroundcolor=gray!20,
3451   innertopmargin=\topskip,
3452 }
3453 \mdtheorem[style=theoremstyle]{definition}{Definition}
3454 \begin{definition}
3455 \ExampleText
3456 \end{definition}
3457 \begin{definition}[Inhomogeneous linear]
3458 \ExampleText
3459 \end{definition}
3460 \begin{definition*}[Inhomogeneous linear]
3461 \ExampleText
3462 \end{definition*}
3463 \end{LTXexample}
3464
3465
3466 \clearpage
3467 \Examplesec{theorem with separate header and the help of TikZ (complex)}

```

```

3468 \begin{LTExample}
3469 \newcounter{theo}[section]
3470 \newenvironment{theo}[1][]{%
3471 \stepcounter{theo}%
3472 \ifstrempy{#1}%
3473 {\mdfsetup{%
3474   frametitle={%
3475     \tikz[baseline=(current bounding box.east),outer sep=0pt]
3476     \node[anchor=east,rectangle,fill=blue!20]
3477     {\strut Theorem~\thetheo};}}
3478 }%
3479 {\mdfsetup{%
3480   frametitle={%
3481     \tikz[baseline=(current bounding box.east),outer sep=0pt]
3482     \node[anchor=east,rectangle,fill=blue!20]
3483     {\strut Theorem~\thetheo:~#1};}}%
3484 }%
3485 \mdfsetup{innertopmargin=10pt,linecolor=blue!20,%
3486           linewidth=2pt,topline=true,
3487           frametitleaboveskip=\dimexpr-\ht\strutbox\relax,}
3488 \begin{mdframed}[]\relax%
3489 }{\end{mdframed}}
3490 \begin{theo}[Inhomogeneous Linear]
3491 \ExampleText
3492 \end{theo}
3493
3494 \begin{theo}
3495 \ExampleText
3496 \end{theo}
3497 \end{LTExample}
3498
3499 \clearpage
3500 \Examplesec{hide only a part of a line}
3501 The example below is inspired by the following post on StackExchange \href{http://tex.stackexchange.com}
3502 \begin{LTExample}
3503 \makeatletter
3504 \newlength{\interruptlength}
3505 \setlength{\interruptlength}{2.5ex}
3506 \newrobustcmd\overlaplines{%
3507 \appto\mdf@frame@leftline@single{%
3508   \llap{\color{white}%
3509     \rule[\dimexpr-\mdfboundingboxdepth+\interruptlength\relax]{%
3510       {\mdf@middlelinewidth@length}%
3511       {\dimexpr\mdfboundingboxtotalheight%
3512         \ifbool{mdf@topline}{+\mdf@middlelinewidth@length}{}}
3513       -2\interruptlength\relax}%
3514   }%
3515 }%
3516 \appto\mdf@frame@rightline@single{%
3517   \rlap{\color{white}%
3518     \hspace*{\mdfboundingboxwidth}%
3519     \hspace*{\mdf@innerrightmargin@length}%
3520     \rule[\dimexpr-\mdfboundingboxdepth%
3521       +\interruptlength\relax]{%
3522       {\mdf@middlelinewidth@length}%
3523       {\dimexpr\mdfboundingboxtotalheight%

```

```

3524         +\ifbool{mdf@topline}{\mdf@middlelinewidth@length}{0pt}
3525         -2\interruptlength\relax}%
3526     }%
3527 }%
3528 }
3529 \makeatother
3530 \overlappines
3531
3532 \begin{mdframed}[linecolor=blue,linewidth=8pt]
3533 \ExampleText
3534 \end{mdframed}
3535 \end{LTXexample}
3536 \end{document}
3537 \endinput

```

D. The file `mdframed-example-tikz`

```

3538 %Documentation of the package mdframed
3539 %$Id: mdframed.dtx 375 2012-04-08 10:52:22Z marco $
3540 \setcounter{errorcontextlines}{999}
3541 \documentclass[parskip=false,english,11pt]{ltxmdf}
3542 \ltxmdfsetifoot $Id: mdframed.dtx 375 2012-04-08 10:52:22Z marco $
3543
3544
3545 \usepackage{showexpl}
3546 \lstset{style=lstltxmdf,explpreset={pos=b,rframe={}},}
3547
3548 \newcommand\Loadedframemethod{TikZ}
3549 \usepackage[framemethod=\Loadedframemethod]{mdframed}
3550
3551 \title{The \Pack{mdframed} package}
3552 \subtitle{Examples for \Opt{framemethod=\Loadedframemethod}}
3553 \author{\href{mailto:marco.daniel@mada-nada.de}{Marco Daniel}}
3554 \date{\mdfdateID$Id: mdframed.dtx 375 2012-04-08 10:52:22Z marco $}
3555 \version{\mdversion}
3556 \introduction{In this document I collect various examples for \Opt{framemethod=\Loadedframemethod}.
3557 Some presented examples are more or less exorbitant.}
3558
3559 \mdfsetup{skipabove=\topskip,skipbelow=\topskip}
3560 \newrobustcmd\ExampleText{%
3561     An \textit{inhomogeneous linear} differential equation has the form
3562     \begin{align}
3563         L[v ] = f,
3564     \end{align}
3565     where $L$ is a linear differential operator, $v$ is
3566     the dependent variable, and $f$ is a given non-zero
3567     function of the independent variables alone.
3568 }
3569
3570 \newcounter{examplecount}
3571 \setcounter{examplecount}{0}
3572 \renewcommand\thesubsection{}
3573 \newcommand\Examplesec[1]{%
3574 \stepcounter{examplecount}%
3575 \subsection{Example~\arabic{examplecount}~---\#1\relax}%
3576 }

```

```

3577
3578 \begin{document}
3579 \maketitle
3580 \section{Loading}
3581 In the preamble only the package \Pack{mdframed} with the option \Opt{framemethod=\Loadedframemethod}
3582
3583 {\large\color{red!50!black}
3584 \NOTE Every \Cmd{global} inside the examples is necessary to work with the package \Pack{showexpl}.}
3585
3586 \section{Examples}
3587 All examples have the following settings:
3588
3589 \begin{tltxmdfexample}
3590 \mdfsetup{skipabove=\topskip,skipbelow=\topskip}
3591 \newrobustcmd\ExampleText{%
3592 An \textit{inhomogeneous linear} differential equation
3593 has the form
3594 \begin{align}
3595 L[v ] = f,
3596 \end{align}
3597 where  $L$  is a linear differential operator,  $v$  is
3598 the dependent variable, and  $f$  is a given non-zero
3599 function of the independent variables alone.
3600 }
3601 \end{tltxmdfexample}
3602 \clearpage
3603 \ExampleText{round corner}
3604 \begin{LTExample}
3605 \global\mdfdefinestyle{exampledefault}{%
3606     outerlinewidth=5pt,innerlinewidth=0pt,
3607     outerlinecolor=red,roundcorner=5pt
3608 }
3609 \begin{mdframed}[style=exampledefault]
3610 \ExampleText
3611 \end{mdframed}
3612 \end{LTExample}
3613
3614 \Examplesec{hidden line + frame title}
3615 \begin{LTExample}
3616 \global\mdfapptodefinestyle{exampledefault}{%
3617     topline=false,leftline=false,}
3618 \begin{mdframed}[style=exampledefault,frametitle={Inhomogeneous linear}]
3619 \ExampleText
3620 \end{mdframed}
3621 \end{LTExample}
3622 \clearpage
3623 \Examplesec{framed picture which is centered}
3624 \begin{LTExample}
3625 \begin{mdframed}[userdefinedwidth=6cm,align=center,
3626     linecolor=blue,middlelinewidth=4pt,roundcorner=5pt]
3627 \includegraphics[width=\linewidth]{donald-duck}
3628 \end{mdframed}
3629 \end{LTExample}
3630
3631 \Examplesec{Gimmick}
3632 \begin{LTExample}

```

```

3633 \mdfsetup{splitbottomskip=0.8cm, splittopskip=0cm,
3634         innerrightmargin=2cm, innertopmargin=1cm,%
3635         innerlinewidth=2pt, outerlinewidth=2pt,
3636         middlelinewidth=10pt, backgroundcolor=red,
3637         linecolor=blue, middlelinecolor=gray,
3638         tikzsetting={draw=yellow, line width=3pt,%
3639                 dashed,%
3640                 dash pattern= on 10pt off 3pt},
3641         rightline=false, bottomline=false}
3642 \begin{mdframed}
3643 \ExampleText
3644 \end{mdframed}
3645 \end{LTXexample}
3646
3647 \Examplesec{complex example with TikZ}
3648
3649 \begin{tltxmdfexample}
3650 \tikzstyle{titregris} =
3651     [draw=gray, thick, fill=white, shading = exersicetitle, %
3652     text=gray, rectangle, rounded corners, right, minimum height=.7cm]
3653
3654 \pgfdeclarehorizontalshading{exersicebackground}{100bp}
3655     {color(0bp)=(green!40); color(100bp)=(black!5)}
3656
3657 \pgfdeclarehorizontalshading{exersicetitle}{100bp}
3658     {color(0bp)=(red!40); color(100bp)=(black!5)}
3659
3660 \newcounter{exercise}
3661 \renewcommand*{\theexercise}{Exercise~\n\arabic{exercise}}
3662 \makeatletter
3663 \def\mdf@@exercisepoints{}%new mdframed key:
3664 \define@key{mdf}{exercisepoints}{%
3665     \def\mdf@@exercisepoints{#1}
3666 }
3667 \makeatother
3668
3669 \mdfdefinestyle{exercisestyle}{%
3670     outerlinewidth=1pt, innerlinewidth=0pt,
3671     roundcorner=2pt, linecolor=gray,
3672     tikzsetting={shading = exersicebackground},
3673     innertopmargin=1.2\baselineskip,
3674     skipabove={\dimexpr0.5\baselineskip+\topskip\relax},
3675     needspace=3\baselineskip,
3676     frametitlefont=\sffamily\bfseries,
3677     settings={\global\stepcounter{exercise}},
3678     singleextra={%
3679         \node[titregris, xshift=1cm] at (P-|0) %
3680             {\~\mdf@frametitlefont{\theexercise}~};
3681         \ifdefempty{\mdf@@exercisepoints}%
3682             {}%
3683             {\node[titregris, left, xshift=-1cm] at (P)%
3684                 {\~\mdf@frametitlefont{\mdf@@exercisepoints points}~};}%
3685     },
3686     firstextra={%
3687         \node[titregris, xshift=1cm] at (P-|0) %
3688             {\~\mdf@frametitlefont{\theexercise}~};

```

```

3689     \ifdefempty{\mdf@@exercisepoints}%
3690     {}%
3691     {\node[titregris,left,xshift=-1cm] at (P)%
3692       {\mdf@frametitlefont{\mdf@@exercisepoints points}~};}%
3693   },
3694 }
3695 \begin{mdframed}[style=exercisestyle,]
3696 \ExampleText
3697 \end{mdframed}
3698
3699 \begin{mdframed}[style=exercisestyle,exercisepoints=10]
3700 \ExampleText
3701 \end{mdframed}
3702 \end{tltxmdfexample}
3703 \clearpage
3704 \Examplesec{Theorem environments}
3705 \begin{LTXexample}
3706 \mdfdefinestyle{theoremstyle}{%
3707   linecolor=red,linewidth=2pt,%
3708   frametitlerule=true,%
3709   apptotikzsetting={\tikzset{mdfframetitlebackground/.append style={%
3710     shade,left color=white, right color=blue!20}}},
3711   frametitlerulecolor=green!60,
3712   frametitlerulewidth=1pt,
3713   innertopmargin=\topskip,
3714   }
3715 \mdtheorem[style=theoremstyle]{definition}{Definition}
3716 \begin{definition}[Inhomogeneous linear]
3717 \ExampleText
3718 \end{definition}
3719 \begin{definition*}[Inhomogeneous linear]
3720 \ExampleText
3721 \end{definition*}
3722 \end{LTXexample}
3723
3724 \end{document}
3725 \endinput

```

E. The file `mdframed-example-pstricks`

```

3726 %Documentation of the package mdframed
3727 %$Id: mdframed.dtx 375 2012-04-08 10:52:22Z marco $
3728 \setcounter{errorcontextlines}{999}
3729 \documentclass[parskip=false,english,11pt]{ltxmdf}
3730 \ltxmdfsetifoot$Id: mdframed.dtx 375 2012-04-08 10:52:22Z marco $
3731
3732 \lstDeleteShortInline{[]}
3733 \newcommand\Loadedframemethod{PSTricks}
3734 \usepackage[framemethod=\Loadedframemethod]{mdframed}
3735
3736 \usepackage{showexpl}
3737 \lstset{style=lstltxmdf,explpreset={pos=b,rframe={}},}
3738
3739 \title{The \Pack{mdframed} package}
3740 \subtitle{Examples for \Opt{framemethod=\Loadedframemethod}}
3741 \author{\href{mailto:marco.daniel@mada-nada.de}{Marco Daniel}}

```

```

3742 \date{\mdfdateID$Id: mdframed.dtx 375 2012-04-08 10:52:22Z marco $}
3743 \version{\mdversion}
3744 \introduction{In this document I collect various examples for \Opt{framemethod=\Loadedframemethod}.
3745 Some presented examples are more or less exorbitant.}
3746
3747 \mdfsetup{skipabove=\topskip,skipbelow=\topskip}
3748 \newrobustcmd\ExampleText{%
3749     An \textit{inhomogeneous linear} differential equation has the form
3750     \begin{align}
3751         L[v ] = f,
3752     \end{align}
3753     where  $L$  is a linear differential operator,  $v$  is
3754     the dependent variable, and  $f$  is a given non-zero
3755     function of the independent variables alone.
3756 }
3757
3758 \newcounter{examplecount}
3759 \setcounter{examplecount}{0}
3760 \renewcommand\thesubsection{}
3761 \newcommand\Examplesec[1]{%
3762 \stepcounter{examplecount}%
3763 \subsection{Example~\arabic{examplecount}~---~#1\relax}%
3764 }
3765
3766 \begin{document}
3767 \maketitle
3768 \section{Loading}
3769 In the preamble only the package \Pack{mdframed} with the option \Opt{framemethod=\Loadedframemethod}
3770
3771 {\large\color{red!50!black}
3772 \NOTE Every \Cmd{global} inside the examples is necessary to work with the package \Pack{showexpl}.}
3773 X
3774 \section{Examples}
3775 All examples have the following settings:
3776
3777 \begin{tltxmdfexample}
3778 \mdfsetup{skipabove=\topskip,skipbelow=\topskip}
3779 \newrobustcmd\ExampleText{%
3780 An \textit{inhomogeneous linear} differential equation
3781 has the form
3782 \begin{align}
3783 L[v ] = f,
3784 \end{align}
3785 where  $L$  is a linear differential operator,  $v$  is
3786 the dependent variable, and  $f$  is a given non-zero
3787 function of the independent variables alone.
3788 }
3789 \end{tltxmdfexample}
3790 \clearpage
3791
3792 \Examplesec{very simple}
3793 \begin{LTXexample}
3794 \global\mdfdefinestyle{exampledefault}{%
3795     linecolor=red,middlelinewidth=3pt,%
3796     leftmargin=1cm,rightmargin=1cm
3797 }

```

```

3798 \begin{mdframed}[style=exampledefault,roundcorner=5]
3799 \ExampleText
3800 \end{mdframed}
3801 \end{LTXexample}
3802
3803 \Examplesec{hidden line + frame title}
3804 \begin{LTXexample}
3805 \global\mdfapptodefinestyle{exampledefault}{%
3806   topline=false,rightline=false,bottomline=false,
3807   frametitlerule=true,innertopmargin=6pt,
3808   outerlinewidth=6pt,outerlinecolor=blue,
3809   pstricksappsetting={\addtopsstyle{mdfouterlinestyle}{linestyle=dashed}},
3810   innerlinecolor=yellow,innerlinewidth=5pt}%
3811 \begin{mdframed}[style=exampledefault,frametitle={Inhomogeneous linear}]
3812 \ExampleText
3813 \end{mdframed}
3814 \end{LTXexample}
3815
3816 \clearpage
3817
3818 \Examplesec{Dash Lines}
3819 \begin{LTXexample}
3820 \global\mdfdefinestyle{exampledefault}{%
3821   pstrickssetting={linestyle=dashed,},linecolor=red,linewidth=5pt}
3822 \begin{mdframed}[style=exampledefault,]
3823 \ExampleText
3824 \end{mdframed}
3825 \end{LTXexample}
3826
3827 \Examplesec{Double Lines}
3828 \begin{LTXexample}
3829 \global\mdfdefinestyle{exampledefault}{%
3830   pstrickssetting={doubleline=true,doublesep=6pt},
3831   linecolor=red,linewidth=5pt,middlelinewidth=4pt}
3832 \begin{mdframed}[style=exampledefault,]
3833 \ExampleText
3834 \end{mdframed}
3835 \end{LTXexample}
3836
3837 \Examplesec{Shadow frame}
3838 \begin{LTXexample}
3839 \newmdenv[shadow=true,
3840           shadowsize=11pt,
3841           linewidth=8pt,
3842           frametitlerule=true,
3843           roundcorner=10pt,
3844           ]{myshadowbox}
3845 \begin{myshadowbox}[frametitle={Inhomogeneous linear}]
3846 \ExampleText
3847 \end{myshadowbox}
3848 \end{LTXexample}
3849 \end{document}
3850 \endinput

```

F. The file `mdframed-example-texsx`


```

3851 %Documentation of the package mdframed
3852 %$Id: mdframed.dtx 375 2012-04-08 10:52:22Z marco $
3853 \setcounter{errorcontextlines}{999}
3854 \documentclass[parskip=false,english,11pt,ltxlipsum]{ltxmdf}
3855 \ltxmdfsetifoot $Id: mdframed.dtx 375 2012-04-08 10:52:22Z marco $
3856
3857
3858 \usepackage{showexpl}
3859 \lstset{style=lstltxmdf,explpreset={pos=b,rframe={}},}
3860 \usepackage{tikz}
3861 \usetikzlibrary{calc,arrows}
3862 \newcommand\Loadedframemethod{tikz}
3863 \usepackage[framemethod=\Loadedframemethod]{mdframed}
3864
3865 \title{The \Pack{mdframed} package}
3866 \subtitle{Examples for \Opt{framemethod=\Loadedframemethod}}
3867 \author{\href{mailto:marco.daniel@mada-nada.de}{Marco Daniel}}
3868 \date{\mdfdateID$Id: mdframed.dtx 375 2012-04-08 10:52:22Z marco $}
3869 \version{\mdversion}
3870 \introduction{In this document I collect various examples for \Opt{framemethod=\Loadedframemethod}.
3871 Some presented examples are more or less exorbitant.}
3872
3873 \mdfsetup{skipabove=\topskip,skipbelow=\topskip}
3874 \newrobustcmd\ExampleText{%
3875     An \textit{inhomogeneous linear} differential equation has the form
3876     \begin{align}
3877         L[v ] = f,
3878     \end{align}
3879     where  $L$  is a linear differential operator,  $v$  is
3880     the dependent variable, and  $f$  is a given non-zero
3881     function of the independent variables alone.
3882 }
3883
3884 \newcounter{examplecount}
3885 \setcounter{examplecount}{0}
3886 \renewcommand\thesubsection{}
3887 \newcommand\Examplesec[1]{%
3888 \stepcounter{examplecount}%
3889 \subsection{Example~\arabic{examplecount}~---#1\relax}%
3890 }
3891
3892 \begin{document}
3893 \maketitle
3894 \section{Loading}
3895 In the preamble only the package \Pack{mdframed} with the option \Opt{framemethod=\Loadedframemethod}
3896
3897 {\large\color{red!50!black}
3898 \NOTE Every \Cmd{global} inside the examples is necessary to work with the package \Pack{showexpl}.}
3899
3900 \section{Examples}
3901 All examples have the following settings:
3902
3903 \begin{tltxmdfexample}
3904 \mdfsetup{skipabove=\topskip,skipbelow=\topskip}
3905 \newrobustcmd\ExampleText{%
3906 An \textit{inhomogeneous linear} differential equation

```

```

3907 has the form
3908 \begin{align}
3909 L[v ] = f,
3910 \end{align}
3911 where  $L$  is a linear differential operator,  $v$  is
3912 the dependent variable, and  $f$  is a given non-zero
3913 function of the independent variables alone.
3914 }
3915 \end{tltxmdfexample}
3916 \clearpage
3917 \Examplesec{Package listings}
3918 The example below is inspired by the following post on StackExchange \href{http://tex.stackexchange.com}
3919
3920 Here the solution which can be decorate as usual.
3921
3922 \begin{tltxmdfexample}[moretexcs={BeforeBeginEnvironment,AfterEndEnvironment},morekeywords={lstlisting}]
3923 \BeforeBeginEnvironment{lstlisting}{%
3924     \begin{mdframed}[<modification>%
3925         \vspace{-0.7em}}
3926 \AfterEndEnvironment{lstlisting}{%
3927     \vspace{-0.5em}%
3928     \end{mdframed}}
3929 \end{tltxmdfexample}
3930
3931 With the new command \Cmd{surroundwithmdframed} you can use
3932 \begin{tltxmdfexample}[moretexcs={BeforeBeginEnvironment,AfterEndEnvironment},morekeywords={lstlisting}]
3933 \surroundwithmdframed{listings}
3934 \end{tltxmdfexample}
3935
3936 \Examplesec{Package multicol}
3937 How I wrote in \enquote{Known Problems} you can't combine \Pack{multicol} with \Pack{mdframed}. In a s
3938 \begin{LTXexample}
3939 \begin{multicols}{2}
3940 \lipsum[1]
3941 \begin{mdframed}
3942 \ExampleText
3943 \end{mdframed}
3944 \lipsum[2]
3945 \end{multicols}
3946 \end{LTXexample}
3947 \clearpage
3948 \twocolumn[\Examplesec{Working in twocolumn mode}]
3949 \begin{tltxmdfexample}
3950 \twocolumn[%
3951     \Examplesec{Working in
3952         twocolumn mode}]
3953 \lipsum[1]\lipsum[2]
3954 \begin{mdframed}[%
3955     leftmargin=10pt,%
3956     rightmargin=10pt,%
3957     linecolor=red,
3958     backgroundcolor=yellow]
3959 \ExampleText
3960 \end{mdframed}
3961 \lipsum[2]
3962 \end{tltxmdfexample}

```

```

3963 \lipsum[1]\lipsum[2]
3964 \begin{mdframed}[leftmargin=10pt,%
3965             rightmargin=10pt,%
3966             linecolor=red,
3967             backgroundcolor=yellow]
3968 \ExampleText
3969 \end{mdframed}
3970 \lipsum[2]
3971 \clearpage
3972 \onecolumn
3973 \Examplesec{Working inside enumerate}
3974 \begin{LTXexample}
3975 Text Text Text Text Text Text Text Text
3976 \begin{enumerate}
3977 \item in the following \ldots
3978     \begin{mdframed}[linecolor=blue,linewidth=2]
3979         \ExampleText
3980     \end{mdframed}
3981 \item \lipsum[2]
3982 \end{enumerate}
3983 Text Text Text Text Text Text
3984 \end{LTXexample}
3985 \clearpage
3986 \Examplesec{digression-environement inspired by Tobias Schwan}
3987 \begin{lstlisting}
3988 \usetikzlibrary{calc,arrows}
3989 \tikzset{
3990     excursus arrow/.style={%
3991         line width=2pt,
3992         draw=gray!40,
3993         rounded corners=2ex,
3994     },
3995     excursus head/.style={
3996         fill=white,
3997         font=\bfseries\sffamily,
3998         text=gray!80,
3999         anchor=base west,
4000     },
4001 }
4002 \mdfdefinestyle{digressionarrows}{%
4003     singleextra={%
4004         \path let \p1=(P), \p2=(0) in (\x2,\y1) coordinate (Q);
4005         \path let \p1=(Q), \p2=(0) in (\x1,{(\y1-\y2)/2}) coordinate (M);
4006         \path [excursus arrow, round cap-to]
4007             ($(Q)+(5em,0ex)$) -| (M) |- %
4008             ($(Q)+(12em,0ex)$) .. controls +(0:16em) and +(185:6em) .. %
4009             ++(23em,2ex);
4010         \node [excursus head] at ($(Q)+(2.5em,-0.75pt)$) {Digression};},
4011     firstextra={%
4012         \path let \p1=(P), \p2=(0) in (\x2,\y1) coordinate (Q);
4013         \path [excursus arrow,-to]
4014             (0) |- %
4015             ($(Q)+(12em,0ex)$) .. controls +(0:16em) and +(185:6em) .. %
4016             ++(23em,2ex);
4017         \node [excursus head] at ($(Q)+(2.5em,-2pt)$) {Digression};},
4018     secondextra={%

```

```

4019     \path let \p1=(P), \p2=(O) in (\x2,\y1) coordinate (Q);
4020     \path [excursus arrow,round cap-]
4021         ($ (0)+(5em,0ex)$) -| (Q);},
4022 middleextra={%
4023     \path let \p1=(P), \p2=(O) in (\x2,\y1) coordinate (Q);
4024     \path [excursus arrow]
4025         (O) -- (Q);},
4026 middlelinewidth=2.5em,middlelinecolor=white,
4027 hidealllines=true,topline=true,
4028 innertopmargin=0.5ex,
4029 innerbottommargin=2.5ex,
4030 innerrightmargin=2pt,
4031 innerleftmargin=2ex,
4032 skipabove=0.87\baselineskip,
4033 skipbelow=0.62\baselineskip,
4034 }
4035
4036 \begin{mdframed}[style=digressionarrows]
4037     \ExampleText
4038 \end{mdframed}
4039 \end{lstlisting}
4040
4041 \tikzset{
4042     excursus arrow/.style={%
4043         line width=2pt,
4044         draw=gray!40,
4045         rounded corners=2ex,
4046     },
4047     excursus head/.style={
4048         fill=white,
4049         font=\bfseries\sffamily,
4050         text=gray!80,
4051         anchor=base west,
4052     },
4053 }
4054 \mdfdefinestyle{digressionarrows}{%
4055     singleextra={%
4056         \path let \p1=(P), \p2=(O) in (\x2,\y1) coordinate (Q);
4057         \path let \p1=(Q), \p2=(O) in (\x1,{(\y1-\y2)/2}) coordinate (M);
4058         \path [excursus arrow, round cap-to]
4059             ($ (0)+(5em,0ex)$) -| (M) |- %
4060             ($ (Q)+(12em,0ex)$) .. controls +(0:16em) and +(185:6em) .. %
4061             ++(23em,2ex);
4062         \node [excursus head] at ($ (Q)+(2.5em,-0.75pt)$) {Digression};},
4063     firstextra={%
4064         \path let \p1=(P), \p2=(O) in (\x2,\y1) coordinate (Q);
4065         \path [excursus arrow,-to]
4066             (O) |- %
4067             ($ (Q)+(12em,0ex)$) .. controls +(0:16em) and +(185:6em) .. %
4068             ++(23em,2ex);
4069         \node [excursus head] at ($ (Q)+(2.5em,-2pt)$) {Digression};},
4070     secondextra={%
4071         \path let \p1=(P), \p2=(O) in (\x2,\y1) coordinate (Q);
4072         \path [excursus arrow,round cap-]
4073             ($ (0)+(5em,0ex)$) -| (Q);},
4074     middleextra={%

```

```
4075     \path let \p1=(P), \p2=(O) in (\x2,\y1) coordinate (Q);
4076     \path [excursus arrow]
4077         (O) -- (Q);},
4078     middlelinewidth=2.5em,middlelinecolor=white,
4079     hidealllines=true,topline=true,
4080     innertopmargin=0.5ex,
4081     innerbottommargin=2.5ex,
4082     innerrightmargin=2pt,
4083     innerleftmargin=2ex,
4084     skipabove=0.87\baselineskip,
4085     skipbelow=0.62\baselineskip,
4086 }
4087
4088 \begin{mdframed}[style=digressionarrows]
4089     \ExampleText
4090 \end{mdframed}
4091 \end{document}
4092 \endinput
```

G. Change History

v1.0a		<code>\item\mbox\relax</code> – Need for <code>amsthm</code>	29
General: Created <code>dtx</code> and fixes bugs	1	changed definition of <code>\mdf@lrbox</code> (Thanks Lars Madsen)	28
v1.0b		Changed the enddefinition of <code>mdframed</code> . Uses now <code>\doendpe</code> instead of <code>\endparenv</code>	37
General: added command <code>\@parboxrestore</code> to <code>\mdf@lrbox</code>	28	Edit algorithm to combine the saveboxes <code>\mdf@frametitlebox</code> and <code>\mdf@splitboxone</code> by the predefined settings: <code>\parskip\z@</code> , <code>\parindent\z@</code> and <code>\offinterlineskip</code>	33
removed <code>\setbox\mdf@splitbox@two</code>			
<code>\vbox\unvbox \mdf@splitbox@two</code>	41		
v1.1beta			
General: added command to avoid overfull box warning by <code>vsplit</code>	29		
Added frametitle detection to <code>\detected@mdf@put@frame</code>	36	v1.2a	
added lost semicolons	57	General: take account of <code>\parskip</code> for the vertical calculation	38
Added method frame title via <code>\savebox</code>	33		
Added option <code>frametitlerulecolor</code> , <code>frametitlebackgroundcolor</code> , <code>font</code>	24	v1.3	
Added option <code>titleaboveskip</code> , <code>titlebelowskip</code> , <code>frametitlerulewidth</code>	23	General: Added option <code>shadow</code>	25
Added option <code>usetwoside</code>	25	Use now <code>\item\mbox\relax</code>	29
Changed the definition of <code>\mdf@trivlist</code>	37		
Create new <code>\savebox</code> and renamed <code>\@tempboxa</code>	27	v1.3a	
Defining <code>mdframed</code> with <code>\newenvironment</code>	37	General: fixes bug with <code>\doendpe</code> (Thanks Dietrich Grau)	28
Joining all new definitions	27		
Redefinition of <code>\newmdtheoremenv</code> . – Now check of theorem definition.	30	v1.4	
Removing <code>\@arrayparboxrestore</code>	39	General: Changed the detecting of float environments. Now <code>mdframed</code> uses only <code>\@capytype</code> instead of <code>\@floatpenalty</code>	36
Renamed some commands so that every command have the same prefix <code>\mdf@</code>	1	Changed the enddefinition of <code>mdframed</code> . Uses now a line to provide the defined width	37
v1.1release			
General: Added <code>\mbox</code> to the definition.		v1.4a	
		General: added extra test for a wrong splitted box	41

H. Index

The index only collect package relevant words.

Symbols	
<code>\@definecounter</code>	463, 483
<code>\@doendpe</code>	364, 767
<code>\@itemlabel</code>	395
<code>\@namedef</code>	514
<code>\@nameuse</code>	514
<code>\@newctr</code>	483
<code>\@nmbulistfalse</code>	390
<code>\@parboxrestore</code>	358
<code>\@temptitle</code> 468, 470, 475, 478, 479, 491, 493, 498, 502, 504, 509, 518, 520, 525, 528, 529	
<code>\@thmcounter</code>	464, 484, 487
<code>\@thmcountersep</code>	486
<code>\@trivlist</code>	391
<code>_</code>	475, 478, 498, 525, 528
A	
<code>\addtolength</code>	816
<code>\addtopstyle</code>	2531, 3809
<code>align (option)</code>	8
<code>apptotikzsetting (option)</code>	9
<code>\arabic</code>	3374, 3575, 3661, 3763, 3889
<code>\author</code>	3352, 3553, 3741, 3867
B	
<code>backgroundcolor (option)</code>	7
<code>\booltrue</code>	537
<code>bottomline (option)</code>	10
C	
<code>\clearpage</code>	3401, 3421, 3444, 3466, 3499, 3602, 3622, 3703, 3790, 3816, 3916, 3947, 3971, 3985
<code>\closedshadow</code>	2894, 3241
<code>\Cmd</code>	3380, 3383, 3581, 3584, 3769, 3772, 3895, 3898, 3931
<code>\csappto</code>	420
<code>\CurrentOption</code>	277
D	
<code>\date</code>	3353, 3554, 3742, 3868
<code>\DeclareDocumentCommand</code>	443, 455
<code>defaultunit (option)</code>	5
<code>\deferred@thm@head</code>	376, 377
<code>\detected@mdf@put@frame</code> 573, <u>683</u> , 684, 756, 761	
<code>\DisableKeyvalOption</code>	1212, 1213
<code>\documentclass</code>	3341, 3541, 3729, 3854
<code>\draw</code>	1790
<code>\drawbackgroundframetitle@first</code>	1961, 1965, 1976, 2974, 2978, 2988
<code>\drawbackgroundframetitle@middle</code>	2159, 2165, 2183, 3145, 3150
<code>\drawbackgroundframetitle@second</code>	2340, 2345, 3317, 3321
<code>\drawbackgroundframetitle@single</code>	1933, 1936, 2792, 2795
<code>\drawbackgroundframetitle@first</code>	1957, 2143, 2956, 2970
<code>\drawbackgroundframetitle@middle</code>	2155, 2324, 3128, 3141
<code>\drawbackgroundframetitle@second</code>	2336, 2500, 3300, 3313
<code>\drawbackgroundframetitle@single</code>	1918, 1931, 2775, 2790
E	
<code>\endgroup</code>	30, 274, 575, 612, 910, 1044, 1113, 1137, 1792, 2625, 2640, 2661, 2812, 3007, 3163, 3334
<code>\endmdf@lrbox</code>	<u>346</u> , 367, 568, 583, 754, 759
<code>\endmdf@trivlist</code>	<u>386</u> , 401, 402, 766
<code>\endpsclip</code> 2581, 2589, 2603, 2622, 2638, 2782, 2962	
<code>\enquote</code>	3937
<code>everyline (option)</code>	8
<code>\Examplesec</code> 3372, 3402, 3413, 3423, 3436, 3445, 3467, 3500, 3573, 3614, 3623, 3631, 3647, 3704, 3761, 3792, 3803, 3818, 3827, 3837, 3887, 3917, 3936, 3948, 3951, 3973, 3986	
<code>\ExampleText</code>	3359, 3390, 3409, 3418, 3432, 3455, 3458, 3461, 3491, 3495, 3533, 3560, 3591, 3603, 3610, 3619, 3643, 3696, 3700, 3717, 3720, 3748, 3779, 3799, 3812, 3823, 3833, 3846, 3874, 3905, 3942, 3959, 3968, 3979, 4037, 4089
F	
<code>\f@size</code>	1026
<code>firstextra (option)</code>	10
<code>font (option)</code>	8
<code>fontcolor (option)</code>	7
<code>footnotedistance (option)</code>	12
<code>footnoteinside (option)</code>	13
<code>framemethod (option)</code>	4
<code>frametitle (option)</code>	10
<code>frametitleaboveskip (option)</code>	11
<code>frametitlealignment (option)</code>	11
<code>frametitlebackgroundcolor (option)</code>	11
<code>frametitlebelowskip (option)</code>	11
<code>frametitlefont (option)</code>	11
<code>frametitlerule (option)</code>	11
<code>frametitlerulewidth (option)</code>	11
G	
<code>\global</code> 514, 570, 572, 585, 586, 587, 588, 589, 604, 610, 1393, 1401, 1622, 1962, 1966,	

- 2160, 2975, 2979, 3146, 3404, 3415, 3426,
3605, 3616, 3677, 3794, 3805, 3820, 3829
- H**
- hidealllines (option) 10
\href 3352, 3501, 3553, 3741, 3867, 3918
- I**
- \if@mdf@pageodd 771, 795, 806
\ifcsdef 456
\ifdefempty 746, 755, 760,
1356, 1475, 1580, 1683, 1932, 1958, 2156,
2337, 2791, 2971, 3142, 3314, 3681, 3689
\ifmdf@bottomline 541
\ifmdf@footnoteinside 751
\ifmdf@frametitlebottomline 541
\ifmdf@frametitleleftline 538
\ifmdf@frametitlerightline 540
\ifmdf@frametitletopline 539
\ifmdf@leftline 538
\ifmdf@nobreak 685
\ifmdf@rightline 540
\ifmdf@topline 539
\IfNoValueTF 444, 459, 461
\ifstrempty .. 467, 478, 490, 501, 517, 528, 3472
\IfValueTF 446, 447
\ifvmode 744, 750
\includegraphics 3440, 3627
\indent 377
innerbottommargin (option) 6
innerleftmargin (option) 6
innerlinecolor (option) 7
innerlinewidth (option) 7
innermargin (option) 6
innerrightmargin (option) 6
innertopmargin (option) 6
\interruptlength
..... 3504, 3505, 3509, 3513, 3521, 3525
\introduction 3355, 3556, 3744, 3870
\itemindent 394
- L**
- \labelwidth 392
\ldots 3977
\leavevmode 397
leftline (option) 10
\leftmargin 393
leftmargin (option) 6
linecolor (option) 7
linewidth (option) 7
\lipsum 3940, 3944, 3953, 3961, 3963, 3970, 3981
\Loadedframemethod
... 3347, 3348, 3351, 3355, 3380, 3548,
3549, 3552, 3556, 3581, 3733, 3734, 3740,
3744, 3769, 3862, 3863, 3866, 3870, 3895
\lstDeleteShortInline 3732
- \lstset 3345, 3546, 3737, 3859
\ltxmdfsetifoot 3342, 3542, 3730, 3855
- M**
- \makeatletter 3503, 3662
\makeatother 3529, 3667
\makelabel 396
\maketitle 3378, 3579, 3767, 3893
margin (option) 6
\mbox 398
\mdf@@exercisepoints
..... 3663, 3665, 3681, 3684, 3689, 3692
\mdf@@framemethod 116, 118, 120
\mdf@@frametitle 535, 594, 746
\mdf@@frametitle@use 598, 755, 760
\mdf@@frametitlerule
... 606, 970, 1008, 1097, 1238, 1783, 2650
\mdf@@setzref .. 771, 805, 908, 1042, 1111, 1134
\mdf@advancelength@freevspace@add
..... 856, 862, 1056
\mdf@advancelength@freevspace@sub 856, 859, 936
\mdf@advancelength@horizontalmargin@add . 819
\mdf@advancelength@horizontalmargin@sub .
..... 819, 825
\mdf@advancelength@verticalmarginwhole ..
..... 856, 856, 875, 901
\mdf@align 224, 224
\mdf@alignoption@triple do 81, 82, 84
\mdf@Ax 1836, 1844,
1845, 1920, 2035, 2043, 2044, 2144, 2234,
2242, 2243, 2325, 2396, 2404, 2405, 2501
\mdf@Ay 1837, 1857,
1858, 1920, 2036, 2061, 2062, 2144, 2235,
2257, 2258, 2325, 2397, 2417, 2418, 2501
\mdf@background@default
..... 1230, 1230, 1267, 1379, 1498, 1608
\mdf@backgroundcolor
... 170, 172, 1230, 1719, 1720, 2533, 2534
\mdf@booloption@double do 72, 73, 75
\mdf@checknththeorem 615, 616, 739
\mdf@currentvbadness 370, 373
\mdf@defaultunit 29
\mdf@deferred@thm@head 376
\mdf@define@key@length 43, 47, 61
\mdf@do@alignoption 81, 81, 217, 217
\mdf@do@booloption 72, 72, 190, 190
\mdf@do@lengthoption 56, 56, 133, 133, 160
\mdf@do@stringoption 63, 63, 160
\mdf@dolist 42, 42,
133, 160, 190, 217, 825, 875, 901, 936, 1056
\mdf@endparenv 402, 403
\mdf@firstextra 2147, 2963
\mdf@font 743
\mdf@fontcolor 742, 1717
\mdf@footnotedistance@length 631
\mdf@footnotebox 311

- \mdf@footnoteinput 625, 637, 741
- \mdf@footnoteoutput 625, 628, 753, 762
- \mdf@footnoterule 625, 625, 633
- \mdf@frame@background@first . 1367, 1367, 1474
- \mdf@frame@background@middle 1590, 1597, 1680
- \mdf@frame@background@second 1485, 1485, 1577
- \mdf@frame@background@single 1253, 1253, 1354
- \mdf@frame@bottomline@first 1434, 1471
- \mdf@frame@bottomline@middle 1645, 1685
- \mdf@frame@bottomline@second 1485, 1521, 1579
- \mdf@frame@bottomline@single 1291, 1355
- \mdf@frame@frametitlebackground@first ..
..... 1385, 1475
- \mdf@frame@frametitlebackground@middle ..
..... 1614, 1683
- \mdf@frame@frametitlebackground@second ..
..... 1504, 1580
- \mdf@frame@frametitlebackground@single ..
..... 1273, 1356
- \mdf@frame@leftline@first .. 1367, 1409, 1469
- \mdf@frame@leftline@middle .. 1590, 1590, 1679
- \mdf@frame@leftline@second .. 1485, 1514, 1574
- \mdf@frame@leftline@single
..... 1253, 1302, 1351, 3507
- \mdf@frame@rightline@first .. 1367, 1425, 1478
- \mdf@frame@rightline@middle . 1590, 1625, 1688
- \mdf@frame@rightline@second . 1485, 1530, 1583
- \mdf@frame@rightline@single
..... 1253, 1310, 1359, 3516
- \mdf@frame@topandbottomline@single 1253
- \mdf@frame@topline@first ... 1367, 1417, 1473
- \mdf@frame@topline@middle 1633, 1682
- \mdf@frame@topline@second 1538, 1576
- \mdf@frame@topline@single 1281, 1353
- \mdf@frameIdate@svn 1705, 1706, 1708
- \mdf@frameIIdate@svn 2522, 2523, 2525
- \mdf@framemethod 106, 106
- \mdf@framemethod@i 107, 112, 115
- \mdf@framemethod@ii 108, 113, 117
- \mdf@framemethod@iii 109, 114, 119
- \mdf@frameOdate@svn 1225, 1226, 1228
- \mdf@frametitle 595, 746,
755, 760, 1356, 1475, 1580, 1683, 1932,
1958, 2156, 2337, 2791, 2971, 3142, 3314
- \mdf@frametitleaboveskip@length 590, 613
- \mdf@frametitlealignment 549, 566, 580
- \mdf@frametitlebackground@default
..... 1231, 1274, 1388, 1396, 1507, 1617
- \mdf@frametitlebackgroundcolor
..... 545, 1231, 1721, 2539, 2540
- \mdf@frametitlebelowskip@length
.. 590, 1241, 1403, 1786, 1969, 2653, 2982
- \mdf@frametitlebottomrulecolor 551
- \mdf@frametitlebox 310, 570, 572, 579,
585, 586, 587, 588, 589, 605, 969, 1007, 1096
- \mdf@frametitlefont
..... 564, 582, 3680, 3684, 3688, 3692
- \mdf@frametitlefontcolor 581
- \mdf@frametitleleftmargin@length 547
- \mdf@frametitlerightmargin@length 548
- \mdf@frametitlerulecolor
..... 544, 1236, 1780, 2645, 2646
- \mdf@frametitlerulecolor@default . 1236, 1243
- \mdf@frametitlerulewidth@length
..... 546, 1240, 1247, 1791, 2656
- \mdf@frametitlesettings 552
- \mdf@freepagevspace ... 808, 808, 890, 921, 934
- \mdf@freevspace@length 339, 813,
814, 815, 816, 890, 891, 893, 905, 920,
921, 923, 935, 1054, 1071, 1073, 1074,
1077, 1078, 1079, 1082, 1083, 1084, 1089
- \mdf@Fy 1950,
1953, 1954, 1990, 1993, 1994, 2175, 2178,
2179, 2193, 2196, 2197, 2355, 2358, 2359
- \mdf@hidealllines@check 724, 724, 735
- \mdf@horizontalmargin@equation . 355, 819, 823
- \mdf@horizontalsofbox . 819, 820, 822,
824, 831, 832, 833, 836, 837, 838, 840, 842
- \mdf@horizontalwidthofbox@length 340
- \mdf@iflength 26, 27, 50
- \mdf@iflength@check 26, 28, 32
- \mdf@iflength@cleanup 38, 41
- \mdf@ifstrequal@expand 291, 296, 298, 300
- \mdf@ignorevbadness 369, 369, 569,
571, 584, 603, 609, 961, 989, 995, 1000, 1088
- \mdf@innerbottommargin@length
... 1285, 1334, 1337, 1542, 1563, 1565,
1824, 1837, 2380, 2397, 2692, 2713, 3183, 3203
- \mdf@innerleftmargin@length
1242, 1245, 1329, 1357, 1452, 1476, 1559,
1581, 1664, 1686, 1787, 1789, 1811, 1836,
2005, 2035, 2207, 2234, 2369, 2396, 2680,
2713, 2821, 2857, 3016, 3050, 3172, 3203
- \mdf@innerlinecolor
..... 666, 674, 680, 1233, 1738, 2561
- \mdf@innerlinecolor@default 1233
- \mdf@innerlinewidth@length .. 663, 671, 677,
831, 836, 846, 851, 925, 941, 947, 1061,
1067, 1077, 1082, 1339, 1724, 1736, 1739,
1814, 1818, 1826, 1830, 1846, 1859, 1940,
1944, 1948, 1968, 1980, 1984, 1988, 2008,
2012, 2019, 2025, 2045, 2063, 2169, 2173,
2187, 2191, 2210, 2214, 2222, 2226, 2244,
2259, 2349, 2353, 2372, 2376, 2382, 2388,
2406, 2419, 2543, 2546, 2559, 2562, 2683,
2687, 2695, 2699, 2703, 2720, 2733, 2798,
2802, 2806, 2824, 2828, 2835, 2841, 2864,
2884, 2981, 2991, 2995, 2999, 3019, 3023,
3031, 3035, 3057, 3073, 3153, 3157, 3175,
3179, 3185, 3191, 3210, 3223, 3324, 3328
- \mdf@innermargin@length 779, 799, 801

- \mdf@innerrightmargin@length 1246, 1313, 1330, 1427, 1453, 1532, 1560, 1627, 1665, 1789, 1812, 2006, 2208, 2370, 2681, 2822, 3017, 3173, 3519
- \mdf@innertopmargin@length 924, 973, 1011, 1100, 1250, 1285, 1336, 1420, 1458, 1795, 1823, 2016, 2664, 2693, 2832
- \mdf@keeplines@single [844](#), 844, 878, 904
- \mdf@leftmargin@length 218, 222, 225, 779, 799, 802
- \mdf@lengthoption@doubledo [56](#), 57, 59
- \mdf@linecolor 167, 168, 169, 171, 666, 667, 668, 674, 680
- \mdf@linecolor@bottom [551](#), [1230](#)
- \mdf@linecolor@default .. [1230](#), 1237, 1282, 1292, 1303, 1311, 1410, 1418, 1426, 1435, 1515, 1522, 1531, 1539, 1591, 1626, 1634, 1646
- \mdf@linewidth@length 148, 664, 672, 678
- \mdf@load@style [643](#), 643, 659
- \mdf@LoadFileIfExists [8](#), 10, 98, 99, 101, 102, 122, 128, 129, 130
- \mdf@lrbox [346](#), 347, 565, 579, 748
- \mdf@maindate@svn [1](#), 3, 6
- \mdf@makebox@in [406](#), 411, 1347, 1465, 1570, 1675, 1833, 2032, 2231, 2393, 2707, 2848, 3041, 3197
- \mdf@makebox@out [406](#), 406, 1324, 1448, 1555, 1660, 1806, 2001, 2203, 2365, 2677, 2817, 3012, 3168
- \mdf@makeboxalign@left [224](#), 225, 230, 233, 1325, 1449, 1556, 1661, 1807, 2002, 2204, 2366, 2678, 2818, 3013, 3169
- \mdf@makeboxalign@right [224](#), 226, 231, 234, 1363, 1481, 1586, 1691, 1927, 2151, 2332, 2508, 2786, 2966, 3137, 3309
- \mdf@middleextra 2327, 3134
- \mdf@middlelinecolor 667, 1234, 1752, 2571
- \mdf@middlelinecolor@default 1234, 1237
- \mdf@middlelinewidth@length . 664, 672, 678, 832, 837, 847, 852, 926, 942, 948, 1062, 1068, 1078, 1083, 1258, 1261, 1264, 1287, 1292, 1294, 1296, 1297, 1298, 1305, 1307, 1316, 1318, 1339, 1344, 1346, 1374, 1412, 1414, 1422, 1429, 1431, 1435, 1437, 1439, 1440, 1441, 1462, 1463, 1468, 1490, 1493, 1517, 1522, 1523, 1525, 1526, 1527, 1534, 1539, 1544, 1545, 1547, 1567, 1568, 1573, 1593, 1604, 1629, 1634, 1638, 1639, 1641, 1646, 1648, 1650, 1651, 1652, 1672, 1673, 1678, 1725, 1732, 1739, 1750, 1753, 1754, 1815, 1819, 1827, 1831, 1846, 1848, 1853, 1858, 1861, 1866, 1940, 1944, 1948, 1968, 1980, 1984, 1988, 2009, 2013, 2020, 2026, 2045, 2047, 2051, 2055, 2062, 2065, 2070, 2169, 2173, 2187, 2191, 2211, 2215, 2223, 2227, 2244, 2246, 2251, 2258, 2261, 2266, 2349, 2353, 2373, 2377, 2383, 2389, 2406, 2408, 2413, 2419, 2421, 2428, 2544, 2547, 2554, 2562, 2568, 2570, 2684, 2688, 2696, 2700, 2704, 2719, 2722, 2727, 2732, 2735, 2740, 2799, 2803, 2807, 2819, 2825, 2829, 2836, 2842, 2863, 2866, 2871, 2876, 2883, 2886, 2981, 2992, 2996, 3000, 3014, 3020, 3024, 3032, 3036, 3056, 3059, 3064, 3072, 3075, 3080, 3154, 3158, 3170, 3176, 3180, 3186, 3192, 3209, 3212, 3217, 3222, 3225, 3232, 3325, 3329, 3510, 3512, 3522, 3524
- \mdf@needspace [265](#)
- \mdf@option@length [43](#), 43, 60
- \mdf@outerlinecolor 668, 1235, 1731, 2553
- \mdf@outerlinecolor@default 1235
- \mdf@outerlinewidth@length 665, 673, 679, 833, 838, 848, 853, 927, 943, 949, 1063, 1069, 1079, 1084, 1340, 1729, 1732, 1816, 1820, 1828, 1832, 1845, 1848, 1853, 1858, 1861, 1866, 2010, 2014, 2021, 2027, 2044, 2047, 2051, 2055, 2062, 2065, 2070, 2212, 2216, 2224, 2228, 2243, 2246, 2251, 2258, 2261, 2266, 2374, 2378, 2384, 2390, 2405, 2408, 2413, 2418, 2421, 2428, 2551, 2554, 2685, 2689, 2697, 2701, 2705, 2718, 2721, 2726, 2731, 2734, 2739, 2826, 2830, 2837, 2843, 2862, 2865, 2870, 2875, 2882, 2885, 3021, 3025, 3033, 3037, 3055, 3058, 3063, 3071, 3074, 3079, 3177, 3181, 3187, 3193, 3208, 3211, 3216, 3221, 3224, 3231
- \mdf@outermargin@length 778, 798, 802
- \mdf@Ox 1838, 1847, 1848, 1869, 1939, 1940, 1953, 1979, 1980, 1993, 2037, 2046, 2047, 2074, 2168, 2169, 2178, 2186, 2187, 2196, 2236, 2245, 2246, 2270, 2348, 2349, 2358, 2398, 2407, 2408, 2432
- \mdf@Oy 1839, 1860, 1861, 1869, 2038, 2064, 2065, 2074, 2237, 2260, 2261, 2270, 2399, 2420, 2421, 2432
- \mdf@PackageInfo [8](#), 9, 378, 381, 692, 701, 706, 712, 717, 776, 781, 894, 978
- \mdf@PackageInfoSpace 308, 891
- \mdf@PackageNoInfo 290
- \mdf@PackageWarning [8](#), 8, 14, 92, 103, 229, 277, 282, 302, 419, 457, 619, 654, 841, 869, 885, 953, 1016, 1104, 1120, 1126, 1394, 1963, 2976
- \mdf@pageiseven [771](#)
- \mdf@pageisodd [771](#)
- \mdf@patchamsth [374](#)
- \mdf@patchamsthm 349, 375, 385
- \mdf@print@space [290](#), 294, 889
- \mdf@printheight 292, 302
- \mdf@psset@local [237](#), 244, 246, 2712, 2847, 2856, 3048, 3202
- \mdf@pstricksbox@fl 2576, 2746, 2901, 3090, 3247

- \mdf@pstricksbox@ol 2627, 2767, 2768, 2769,
2770, 2922, 2923, 2924, 2925, 2945, 2947,
2949, 3111, 3112, 3113, 3114, 3121, 3123,
3268, 3269, 3270, 3271, 3290, 3292, 3294
- \mdf@pstricksbox@tcl
2592, 2753, 2755, 2757, 2759, 2908, 2910,
2912, 2914, 2935, 2938, 3097, 3099, 3101,
3103, 3254, 3256, 3258, 3260, 3280, 3283
- \mdf@pstricksbox@tl
..... 2584, 2748, 2749, 2750, 2751,
2903, 2904, 2905, 2906, 2931, 3092, 3093,
3094, 3095, 3249, 3250, 3251, 3252, 3277
- \mdf@pstricksbox@tnc1
..... 2606, 2762, 2764, 2917, 2919,
2942, 3106, 3108, 3119, 3263, 3265, 3287
- \mdf@ptlength@to@pscode 2527, 2527, 2529
- \mdf@ptlength@to@pscode@length .. 2528, 2530
- \mdf@put@frame 688,
690, 699, 883, 883, 896, 932, 1023, 1032, 1038
- \mdf@put@frame@i 912, 917, 917
- \mdf@put@frame@ii 1047, 1053, 1053, 1108, 1116
- \mdf@put@frame@standalone
.... 686, 694, 703, 708, 714, 719, 867, 867
- \mdf@put@frametitulerule 1778, 2650
- \mdf@putbox@first
.. 1043, 1367, 1445, 1957, 1998, 2814, 2814
- \mdf@putbox@middle
.. 1112, 1590, 1657, 2155, 2200, 3009, 3009
- \mdf@putbox@second
.. 1135, 1485, 1552, 2336, 2362, 3165, 3165
- \mdf@putbox@single
... 879, 909, 1253, 1321, 1798, 1803, 2674
- \mdf@Px 1840, 1852, 1853,
1870, 1943, 1944, 1954, 1983, 1984, 1994,
2039, 2050, 2051, 2075, 2172, 2173, 2179,
2190, 2191, 2197, 2238, 2250, 2251, 2271,
2352, 2353, 2359, 2400, 2412, 2413, 2433
- \mdf@Py 1841, 1865,
1866, 1870, 1947, 1948, 1951, 1953, 1954,
1987, 1988, 1991, 1993, 1994, 2040, 2054,
2055, 2069, 2070, 2075, 2176, 2178, 2179,
2194, 2196, 2197, 2239, 2265, 2266, 2271,
2356, 2358, 2359, 2401, 2427, 2428, 2433
- \mdf@reserved@a 683, 686, 688, 690, 694,
699, 703, 708, 714, 719, 722, 870, 879, 881,
886, 896, 911, 912, 915, 932, 1023, 1032,
1038, 1047, 1051, 1108, 1116, 1130, 1138, 1140
- \mdf@reserveda 752, 758, 765
- \mdf@reset 865, 865
- \mdf@restoreparams 351, 359
- \mdf@restorevbadness 369, 372, 373
- \mdf@rightmargin@length 220, 221, 778, 798, 801
- \mdf@roundcorner@length 1718,
1723, 2542, 2545, 2711, 2846, 2855, 3201
- \mdf@secondextra 2503, 3303
- \mdf@setopt@body 535, 555
- \mdf@setopt@title 535, 536, 562
- \mdf@settings 747
- \mdf@shadow@default 1232, 1255, 1369, 1487, 1599
- \mdf@shadowcolor 1232, 1744, 2567
- \mdf@shadows@length
... 1257, 1260, 1263, 1371, 1373, 1376,
1489, 1492, 1495, 1601, 1603, 1742, 1743, 2567
- \mdf@singleextra 1923, 2783
- \mdf@skipabove@length 745
- \mdf@skipbelow@length 404
- \mdf@splitbottomskip@length ... 1073, 1420,
1456, 1459, 1668, 1670, 1969, 2017, 2036,
2218, 2235, 2833, 2857, 2982, 3027, 3050
- \mdf@splitbox@one 312, 565,
570, 572, 604, 607, 610, 611, 748, 868, 874,
884, 888, 900, 952, 962, 964, 966, 974, 984,
987, 990, 992, 996, 999, 1001, 1004, 1012,
1015, 1020, 1021, 1037, 1055, 1089, 1091,
1093, 1101, 1103, 1107, 1119, 1123, 1125,
1129, 1131, 1322, 1327, 1332, 1334, 1361,
1553, 1557, 1561, 1563, 1584, 1804, 1810,
1822, 1920, 2363, 2368, 2379, 2501, 2675,
2679, 2691, 2777, 3166, 3171, 3182, 3302
- \mdf@splitbox@two 313,
962, 963, 976, 980, 981, 984, 990, 991,
993, 996, 1020, 1025, 1034, 1037, 1089,
1090, 1107, 1446, 1450, 1454, 1456, 1479,
1658, 1662, 1666, 1668, 1689, 1999, 2004,
2015, 2144, 2201, 2206, 2217, 2325, 2815,
2820, 2831, 2958, 3010, 3015, 3026, 3130
- \mdf@splittopskip@length ... 960, 967, 972,
988, 1005, 1010, 1087, 1094, 1099, 1969, 2983
- \mdf@stringoption@doubledo 63, 64, 66
- \mdf@style 280
- \mdf@styledefinition 643, 661, 740
- \mdf@tempa
111, 115, 117, 119, 296, 298, 300, 304, 308
- \mdf@templength 26, 29, 51, 52
- \mdf@test@b
1143, 1198, 1911, 2113, 2139, 2309, 2471,
2488, 2770, 2925, 2951, 3114, 3271, 3289
- \mdf@test@l
1143, 1189, 1902, 2104, 2133, 2300, 2462,
2491, 2767, 2922, 2946, 3111, 3268, 3291
- \mdf@test@lb 1143,
1170, 1208, 1883, 2086, 2133, 2282, 2444,
2479, 2753, 2908, 2946, 3097, 3254, 3279
- \mdf@test@lr
1143, 1182, 1895, 2098, 2127, 2294, 2456,
2485, 2762, 2917, 2941, 3106, 3263, 3286
- \mdf@test@lrb 1143,
1166, 1208, 1881, 2085, 2127, 2281, 2443,
2476, 2751, 2906, 2941, 3095, 3252, 3276
- \mdf@test@lt 1143,
1179, 1210, 1892, 2095, 2121, 2291, 2453,
2491, 2759, 2914, 2934, 3103, 3260, 3291

- \mdf@test@ltb 1143,
1160, 1207, 1878, 2082, 2121, 2278, 2440,
2479, 2748, 2903, 2934, 3092, 3249, 3279
- \mdf@test@ltr 1143,
1157, 1206, 1880, 2084, 2118, 2280, 2442,
2485, 2750, 2905, 2930, 3094, 3251, 3286
- \mdf@test@ltrb 1143,
1153, 1206, 1876, 2081, 2118, 2277, 2439,
2476, 2746, 2901, 2930, 3090, 3247, 3276
- \mdf@test@noline
1143, 1202, 1915, 2116, 2140, 2312, 2474,
2498, 2772, 2927, 2952, 3116, 3273, 3297
- \mdf@test@r
1143, 1192, 1905, 2107, 2136, 2303, 2465,
2494, 2768, 2923, 2948, 3112, 3269, 3293
- \mdf@test@rb 1143,
1173, 1209, 1886, 2089, 2136, 2285, 2447,
2482, 2755, 2910, 2948, 3099, 3256, 3282
- \mdf@test@single 1205
- \mdf@test@t
1143, 1195, 1908, 2110, 2130, 2306, 2468,
2497, 2769, 2924, 2944, 3113, 3270, 3296
- \mdf@test@tb
1143, 1185, 1898, 2101, 2130, 2297, 2459,
2488, 2764, 2919, 2944, 3108, 3265, 3289
- \mdf@test@tr 1143,
1176, 1209, 1889, 2092, 2124, 2288, 2450,
2494, 2757, 2912, 2937, 3101, 3258, 3293
- \mdf@test@trb 1143,
1163, 1207, 1879, 2083, 2124, 2279, 2441,
2482, 2749, 2904, 2937, 3093, 3250, 3282
- \mdf@theoremseparator 470, 493, 504, 520
- \mdf@theoremspace 471, 494, 505, 521
- \mdf@theoremtitlefont 472, 495, 506, 522
- \mdf@tikz@settings
..... 1711, 1712, 1808, 2003, 2205, 2367
- \mdf@tikzbox@otl 1758,
1770, 1883, 1886, 1889, 1892, 1895, 1898,
1902, 1905, 1908, 1911, 2086, 2089, 2092,
2095, 2098, 2101, 2104, 2107, 2110, 2113,
2122, 2125, 2128, 2131, 2134, 2137, 2282,
2285, 2288, 2291, 2294, 2297, 2300, 2303,
2306, 2309, 2315, 2317, 2319, 2444, 2447,
2450, 2453, 2456, 2459, 2462, 2465, 2468,
2471, 2480, 2483, 2486, 2489, 2492, 2495
- \mdf@tikzbox@tfl 1758, 1758, 1876,
1878, 1879, 1880, 1881, 2081, 2082, 2083,
2084, 2085, 2119, 2277, 2278, 2279, 2280,
2281, 2439, 2440, 2441, 2442, 2443, 2477
- \mdf@tikzset@local ... 237, 237, 239, 242, 1747
- \mdf@titleaboveskip@length 543
- \mdf@titlebelowskip@length 542
- \mdf@trivlist 386, 386, 745
- \mdf@twoside@checklength 736, 771, 773
- \mdf@userdefinedwidth@length 411, 824
- \mdf@verticalmarginwhole@length . 341, 846,
847, 848, 851, 852, 853, 857, 873, 899, 905
- \mdf@xcolor 253, 253, 257, 261
- \mdf@zref@label 771, 791, 806
- \mdfapptodefinestyle
..... 4, 414, 417, 3415, 3426, 3616, 3805
- \mdfbackgroundstyle 2531
- \mdfboundingboxdepth 336,
1256, 1268, 1275, 1284, 1294, 1304, 1314,
1333, 1370, 1380, 1389, 1397, 1411, 1419,
1428, 1437, 1455, 1488, 1499, 1508, 1516,
1523, 1533, 1541, 1562, 1592, 1600, 1609,
1618, 1628, 1636, 1648, 1667, 3509, 3520
- \mdfboundingboxheight 335, 1284, 1331, 1336,
1402, 1419, 1454, 1458, 1541, 1561, 1565,
1666, 1670, 1759, 1771, 1822, 1823, 1824,
1826, 1827, 1828, 1830, 1831, 1832, 1841,
1959, 1967, 2015, 2016, 2017, 2019, 2020,
2021, 2025, 2026, 2027, 2040, 2217, 2218,
2222, 2223, 2224, 2226, 2227, 2228, 2239,
2379, 2380, 2382, 2383, 2384, 2388, 2389,
2390, 2401, 2691, 2692, 2693, 2695, 2696,
2697, 2699, 2700, 2701, 2709, 2715, 2831,
2832, 2833, 2835, 2836, 2837, 2841, 2842,
2843, 2851, 2853, 2859, 2972, 2980, 3002,
3026, 3027, 3031, 3032, 3033, 3035, 3036,
3037, 3043, 3045, 3052, 3182, 3183, 3185,
3186, 3187, 3191, 3192, 3193, 3199, 3205
- \mdfboundingboxtotalheight 337,
1262, 1270, 1275, 1306, 1317, 1335, 1375,
1382, 1386, 1389, 1399, 1413, 1430, 1457,
1494, 1501, 1508, 1518, 1535, 1564, 1594,
1605, 1611, 1618, 1630, 1636, 1669, 3511, 3523
- \mdfboundingboxtotalwidth 333,
1259, 1269, 1276, 1286, 1295, 1328, 1342,
1372, 1381, 1390, 1398, 1421, 1438, 1451,
1461, 1491, 1500, 1509, 1524, 1543, 1558,
1566, 1602, 1610, 1619, 1637, 1649, 1663, 1671
- \mdfboundingboxwidth 332,
888, 1123, 1131, 1312, 1326, 1329, 1426,
1450, 1452, 1531, 1557, 1559, 1626, 1662,
1664, 1759, 1771, 1810, 1811, 1812, 1814,
1815, 1816, 1818, 1819, 1820, 1833, 1840,
2004, 2005, 2006, 2008, 2009, 2010, 2012,
2013, 2014, 2032, 2039, 2206, 2207, 2208,
2210, 2211, 2212, 2214, 2215, 2216, 2231,
2238, 2368, 2369, 2370, 2372, 2373, 2374,
2376, 2377, 2378, 2393, 2400, 2679, 2680,
2681, 2683, 2684, 2685, 2687, 2688, 2689,
2707, 2709, 2715, 2820, 2821, 2822, 2824,
2825, 2826, 2828, 2829, 2830, 2848, 2852,
2853, 2859, 3015, 3016, 3017, 3019, 3020,
3021, 3023, 3024, 3025, 3041, 3044, 3045,
3052, 3171, 3172, 3173, 3175, 3176, 3177,
3179, 3180, 3181, 3197, 3199, 3205, 3518
- \mdfcreateextratikz 344, 1924, 2148, 2329, 2505

`\mdfdateID` 3353, 3554, 3742, 3868
`\mdfdefinedstyle` 284
`\mdfdefinestyle` 4, [414](#), 414, 3404, 3447, 3605,
3669, 3706, 3794, 3820, 3829, 4002, 4054
`\mdffootnoteboxdepth` 327
`\mdffootnoteboxheight` 326
`\mdffootnoteboxtotalheight` 328
`\mdffootnoteboxtotalwidth` 325
`\mdffootnoteboxwidth` 324
`\mdfframedtitleenv` [535](#), 560, 577, 595
`\mdfframetitlebackground` [2531](#)
`\mdfframetitleboxdepth` 322, 588
`\mdfframetitleboxheight` 321, 587
`\mdfframetitleboxtotalheight`
..... 323, 589, 1275, 1277,
1386, 1389, 1391, 1393, 1401, 1505, 1508,
1510, 1615, 1618, 1620, 1622, 1951, 1959,
1962, 1966, 1967, 1991, 2157, 2160, 2176,
2194, 2338, 2356, 2809, 2972, 2975, 2979,
3002, 3003, 3143, 3146, 3160, 3315, 3331
`\mdfframetitleboxtotalwidth` 320
`\mdfframetitleboxwidth`
..... 319, 586, 1240, 1244, 1789, 2659
`\mdfframetitlerule` [2531](#)
`\mdfglobal@style` 90, 94
`\mdflength` 3, [422](#), 422
`\mdflinestyle` [2531](#)
`\mdfpstricks@appendsettings` ... 248, 250, 2573
`\mdfpstricks@settings`
..... 2531, 2710, 2854, 3046, 3200
`\mdframed` [732](#)
`\mdframed@i` [732](#)
`\mdframed@ii` [732](#)
`\mdframedIIPackagename` [2522](#), 2522, 2526
`\mdframedIPackagename` [1705](#), 1705, 1709
`\mdframedOPackagename` [1225](#), 1225, 1229
`\mdframedpackagename` [1](#),
2, 7, 8, 9, 15, 655, 693, 702, 707, 713, 718
`\mdfsetup` ... 3, [279](#), 279, 287, 430, 542, 556,
613, 734, 3358, 3389, 3473, 3479, 3485,
3559, 3590, 3633, 3747, 3778, 3873, 3904
`\mdfsplitboxdepth` 317
`\mdfsplitboxheight` 316
`\mdfsplitboxtotalheight` 318
`\mdfsplitboxtotalwidth` 315
`\mdfsplitboxwidth` 314
`\mdftotallinewidth` 330, 1338, 1350, 2703
`\mdtheorem` 12, [428](#), 455, 3453, 3715
`\mdversion` [1](#), 1,
7, 1229, 1709, 2526, 3354, 3555, 3743, 3869
middleextra (option) 10
middlelinecolor (option) 7
middlelinewidth (option) 7

N

needspace (option) 8

`\new\protect_.\kern_\.fontdimen_3\font_.\kern_\.fontdimen_3\font_.`
..... [310](#)
`\newmdenv` 3, [428](#), 428, 439, 3839
`\newmdtheoremenv` 11, [428](#), 443
`\newsavebox` 310, 311, 312, 313
nobreak (option) 8
`\nodexn` 2718, 2721, 2726, 2731,
2734, 2739, 2798, 2802, 2806, 2809, 2862,
2865, 2870, 2875, 2882, 2885, 2991, 2995,
2999, 3003, 3004, 3055, 3058, 3063, 3071,
3074, 3079, 3153, 3157, 3160, 3208, 3211,
3216, 3221, 3224, 3231, 3324, 3328, 3331
`\noexpand` 486
`\nointerlineskip` 557, 744, 750, 968, 1006, 1095
`\normalfont` 177, 582
`\NOTE` 3383, 3584, 3772, 3898
ntheorem (option) 8

O

`\offinterlineskip` 602
`\onecolumn` 3972
`\Opt` 3351, 3355, 3380, 3552, 3556,
3581, 3740, 3744, 3769, 3866, 3870, 3895
options:
align 8
apptotikzsetting 9
backgroundcolor 7
bottomline 10
defaultunit 5
everyline 8
firstextra 10
font 8
fontcolor 7
footnotedistance 12
footnoteinside 13
framemethod 4
frametitle 10
frametitleaboveskip 11
frametitlealignment 11
frametitlebackgroundcolor 11
frametitlebelowskip 11
frametitlefont 11
frametitlerule 11
frametitlerulewidth 11
hidealllines 10
innerbottommargin 6
innerleftmargin 6
innerlinecolor 7
innerlinewidth 7
innermargin 6
innerrightmargin 6
innertopmargin 6
leftline 10
leftmargin 6
linecolor 7
linewidth 7

- margin 6
middleextra 10
middlelinecolor 7
middlelinewidth 7
needspace 8
nobreak 8
ntheorem 8
outerlinecolor 7
outerlinewidth 7
outermargin 6
pstricksappsetting 9
pstrickssetting 9
repeatframetitle 11
rightline 10
rightmargin 6
roundcorner 7
secondextra 10
settings 8
shadow 8
shadowcolor 9
shadowsize 8
singleextra 10
skipabove 6
skipbelow 6
splitbottomskip 6
splittopskip 6
style 8
theoremseparator 12
theoremspace 12
theoremtitlefont 12
tikzsetting 9
topline 10
userdefinedwidth 6
usetwoside 8
xcolor 4
outerlinecolor (option) 7
outerlinewidth (option) 7
outermargin (option) 6
\overlaplines 3506, 3530
- P**
- \p 4004, 4005,
4012, 4019, 4023, 4056, 4057, 4064, 4071, 4075
\Pack ... 3350, 3380, 3383, 3551, 3581, 3584,
3739, 3769, 3772, 3865, 3895, 3898, 3937
\pageshrink 951
\parsep 389
\parskip 352, 600, 816
\pgfdeclarehorizontalshading 3654, 3657
\pgfmathsetlength 1789, 1962, 1966, 2160
\pnode 2713, 2714, 2715, 2857, 2858,
2859, 3050, 3051, 3052, 3203, 3204, 3205
\psclip 2579, 2587, 2597, 2611, 2632, 2744, 2897
\pscustom 2597, 2612, 2632, 2891, 3238
\psdot 2778, 2779, 2780, 2959, 2960,
2961, 3131, 3132, 3133, 3304, 3305, 3306
- pstricksappsetting (option) 9
pstrickssetting (option) 9
\ptTps 2527, 2529, 2659
\ptTpsL 2530, 2657, 2658, 2659
- R**
- \refstepcounter 466, 489, 516
\renewdenv 3, 428, 436
repeatframetitle (option) 11
rightline (option) 10
rightmargin (option) 6
roundcorner (option) 7
- S**
- secondextra (option) 10
\section 3379,
3385, 3580, 3586, 3768, 3774, 3894, 3900
\setcounter 3340,
3370, 3540, 3571, 3728, 3759, 3853, 3885
settings (option) 8
\sfffamily 3676, 3997, 4049
shadow (option) 8
shadowcolor (option) 9
shadowsize (option) 8
singleextra (option) 10
skipabove (option) 6
skipbelow (option) 6
\smash 920, 1255, 1369, 1487, 1599
splitbottomskip (option) 6
splittopskip (option) 6
\strut . 475, 479, 498, 509, 525, 529, 3477, 3483
style (option) 8
\subsection 3374, 3575, 3763, 3889
\subtitle 3351, 3552, 3740, 3866
\surroundwithmdframed 3, 422, 424, 3933
- T**
- \textit 3360,
3391, 3561, 3592, 3749, 3780, 3875, 3906
\theexercise 3661, 3680, 3688
\theorempostskipamount 621
\theoremreskipamount 618, 620
theoremseparator (option) 12
theoremspace (option) 12
theoremtitlefont (option) 12
\thesubsection 3371, 3572, 3760, 3886
\thetheo 3477, 3483
\tikz 1790, 3475, 3481
tikzsetting (option) 9
\tikzstyle 3650
\title 3350, 3551, 3739, 3865
topline (option) 10
\topskip 3358, 3389, 3451, 3559,
3590, 3674, 3713, 3747, 3778, 3873, 3904
\twocolumn 3948, 3950

U	
<code>\unvcopy</code>	572, 605, 969, 1007, 1096
<code>\uput</code>	2778, 2779, 2780, 2959, 2960, 2961, 3131, 3132, 3133, 3304, 3305, 3306
<code>\usepackage</code>	3344, 3348, 3545, 3549, 3734, 3736, 3858, 3860, 3863
<code>userdefinedwidth</code> (option)	6
<code>\usetikzlibrary</code>	3861, 3988
<code>usetwoside</code> (option)	8
V	
<code>\vbadness</code>	370, 371, 373
<code>\version</code>	3354, 3555, 3743, 3869
<code>\vspace</code>	3925, 3927
X	
<code>\x</code>	4004, 4005, 4012, 4019, 4023, 4056, 4057, 4064, 4071, 4075
<code>xcolor</code> (option)	4
<code>\xdef</code>	464, 484, 485
Y	
<code>\y</code>	4004, 4005, 4012, 4019, 4023, 4056, 4057, 4064, 4071, 4075